

FEMALE END VIEW


1 = BLACK

2 = GREEN

3 = RED

4 = WHITE

SPECIFICATIONS	
CONTACT CARRIER MATERIAL	RUBBER
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	ALUMINUM/ANODIZED
RATED CURRENT [A]	15.0 A
RATED VOLTAGE [V]	600 V
OUTER JACKET MATERIAL/COLOR	RUBBER/BLACK
CONDUCTOR INSULATION MATERIAL	XLPE
NUMBER OF CONDUCTORS [AWG]	4x14 AWG
PROTECTION CLASS	IEC IP68
TEMPERATURE	-40°C TO +105°C (-40°F TO +221°F)

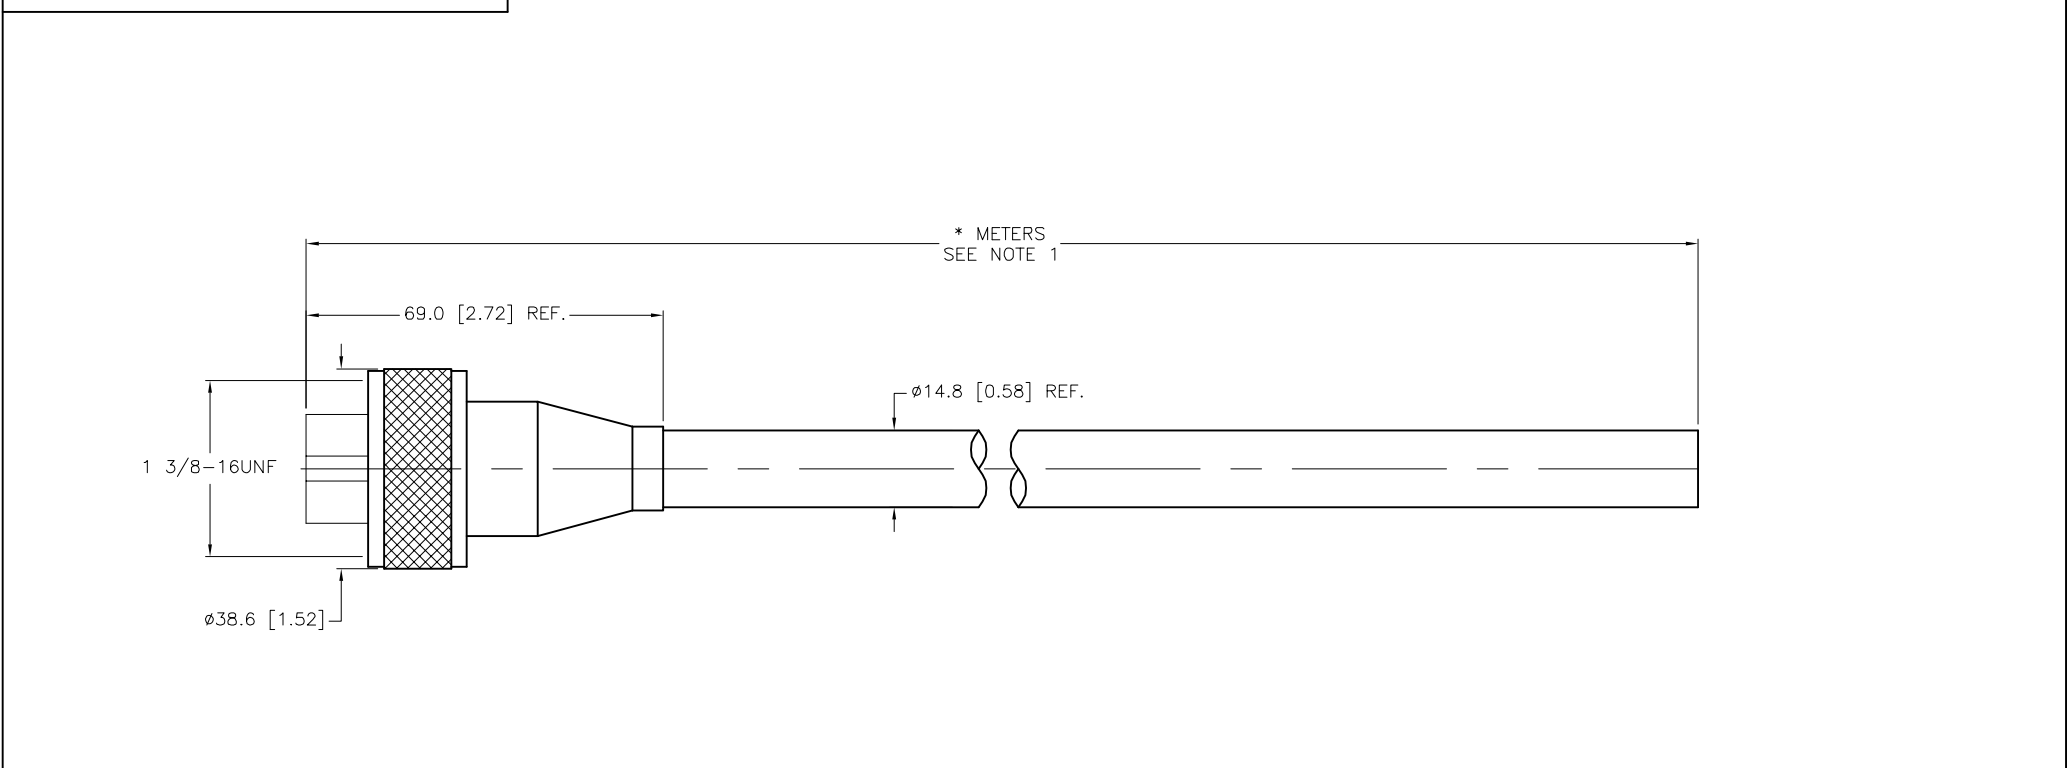

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/S600" DESIGNATES HEAVY DUTY RUBBER INSULATION MATERIAL.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS

1.
2.
3.
4.

3RD ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT

JB

DATE

05/27/03

APVD

SCALE

1=1.5

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

MATERIAL

SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DESCRIPTION

GKM 44-*M/S600

IDENTIFICATION NO.

FILE: 777002746

REV

A

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

A	DRAWING RELEASE	JB	11/26/03	
REV	DESCRIPTION	BY	DATE	ECO. NO.