


SPECIFICATIONS	
CONTACT CARRIER MATERIAL	RUBBER
CONTACT MATERIAL/PLATING	GOLD-PLATED BRASS
COUPLING NUT MATERIAL/PLATING	ALUMINUM/ANODIZED
RATED CURRENT [A]	18.0 A
RATED VOLTAGE [V]	600 V
OUTER JACKET MATERIAL/COLOR	RUBBER/BLACK
CONDUCTOR INSULATION MATERIAL	XLPE
NUMBER OF CONDUCTORS [AWG]	3x14 AWG
DRAIN/SHIELD	NONE
PROTECTION CLASS	IEC IP68
TEMPERATURE	-40°C TO +105°C (-40°F TO +221°F)

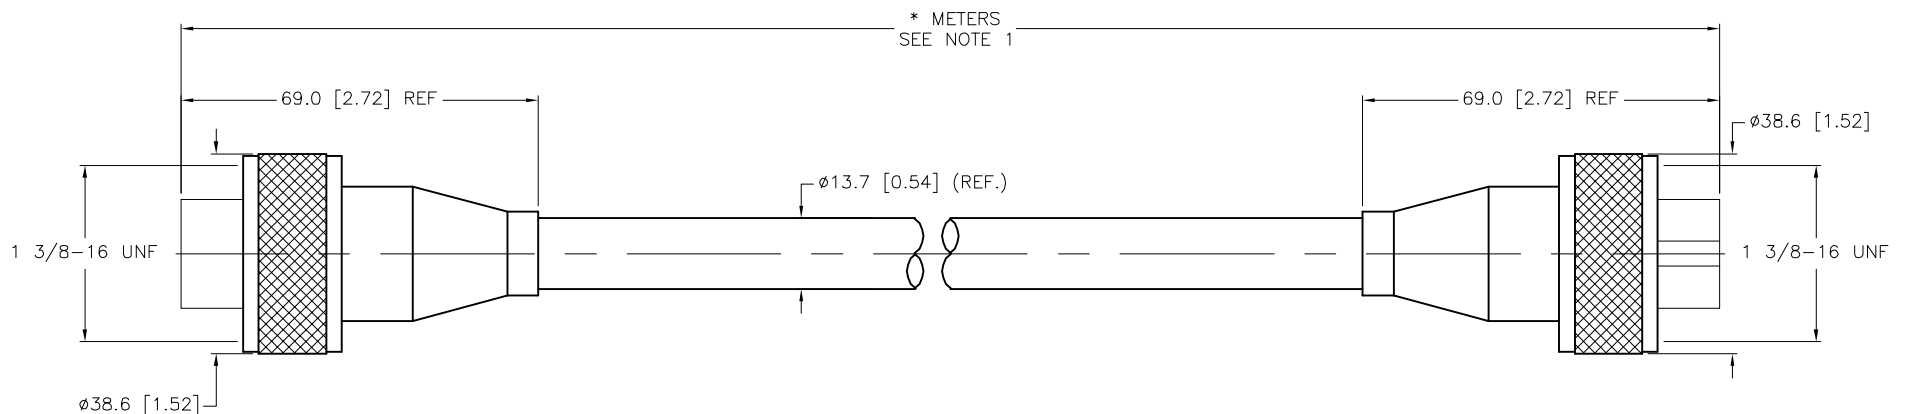


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/S600" DESIGNATES HEAVY DUTY RUBBER INSULATION MATERIAL.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
1. 2. 3. 4.										
MATERIAL		DRFT JBJ					DATE 11/24/03		DESCRIPTION GYM GKM 34-*M/S600	
SEE SPECIFICATIONS		APVD					SCALE 1=1.5			
FINISH		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV B		
SEE SPECIFICATIONS										CONTACT TURCK FOR MORE INFORMATION
				DO NOT SCALE THIS DRAWING		FILE: 777002747		SHEET 1 OF 1		