
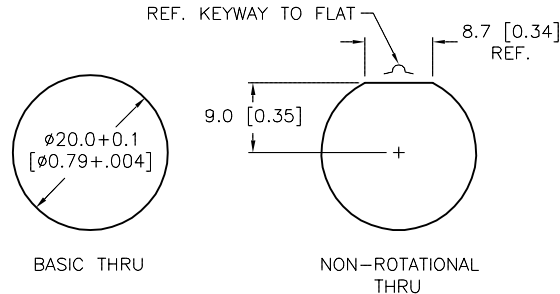

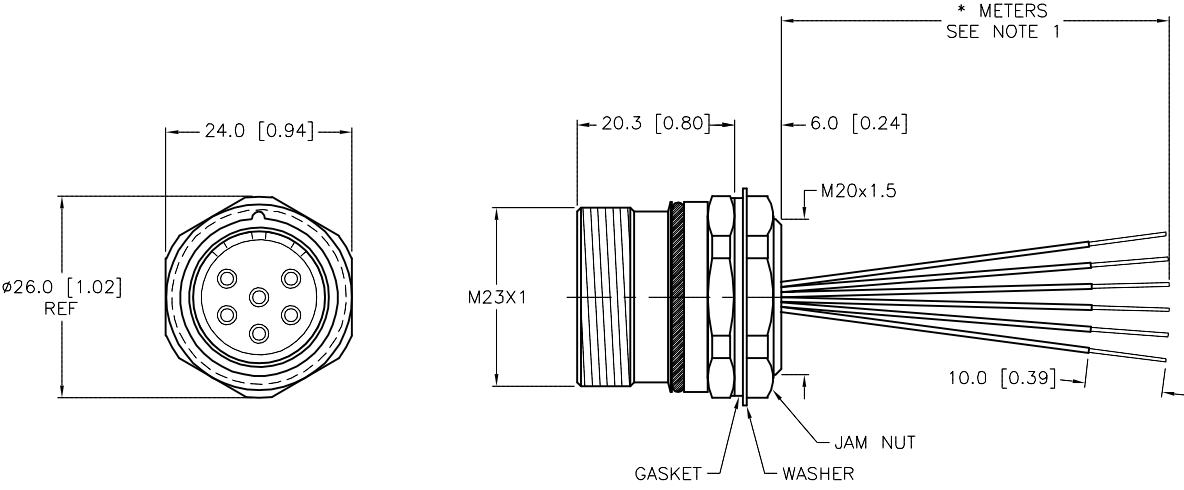


FEMALE END VIEW	PANEL CUTOUT (TYPICAL)	SPECIFICATIONS	
 <div> 1 = WHITE  2 = RED  3 = GREEN/YELLOW  4 = ORANGE  5 = BLACK  6 = BLUE </div>		CONTACT CARRIER MATERIAL/COLOR	NYLON or PBT/GRAY
		CONTACT MATERIAL/PLATING	BRASS/GOLD
 M23 connector		CONNECTOR HOUSING MATERIAL/PLATING	BRASS/NICKEL
		GASKET MATERIAL	RUBBER (NBR or FPM)
		MANUFACTURER RATED CURRENT [A]	20 A
		UL RATED CURRENT [A]	14 A
		RATED VOLTAGE [V]	300 V
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	6x14 AWG
		TEMPERATURE RANGE	-40°C TO +105°C (-40°F TO +221°F)
		PROTECTION CLASS	IEC IP67
		MAXIMUM PANEL THICKNESS	2.0 [0.079"]



CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	



**CAUTION:**  
RISK OF ELECTRICAL SHOCK  
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:  
  
1. "\*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

K	UPDATED CURRENT RATING	ER	01/16/19	66623
REV	DESCRIPTION	BY	DATE	ECO. NO.

RELATED DOCUMENTS

1.  
2.  
3.  
4.


MATERIAL

SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

3RD ANGLE PROJECTION



ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT JBJ

APVD

UNIT OF MEASUREMENT  
**MILLIMETER [ INCH ]**

DO NOT SCALE THIS DRAWING

DATE 12/08/03

SCALE 1=1.0

DESCRIPTION  
CKF 64-6-\*

IDENTIFICATION NO.

REV  
K

3000 CAMPUS DRIVE  
MINNEAPOLIS, MN 55441  
1-800-544-7769  
(763) 553-7300  
(763) 553-0708 fax  
www.turck.us

FILE: 777002857

SHEET 1 OF 1