

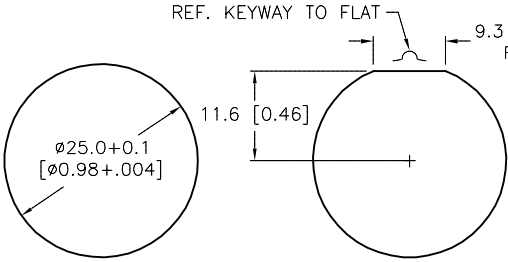


FEMALE END VIEW	PANEL CUTOUT (TYPICAL)	SPECIFICATIONS		
 1 = WHITE 2 = RED 3 = GRN/YEL 4 = ORANGE 5 = BLACK 6 = BLUE	 BASIC THRU NON-ROTATIONAL THRU	CONTACT CARRIER MATERIAL/COLOR	NYLON or PBT/GREY	
		CONTACT MATERIAL/PLATING	BRASS/GOLD	
 M23 connector		CONNECTOR HOUSING MATERIAL/PLATING	BRASS/NICKEL	
		O-RING/GASKET MATERIAL	RUBBER (NBR or FPM)	
		MANUFACTURER RATED CURRENT [A]	20 A	
		UL RATED CURRENT [A]	14 A	
		RATED VOLTAGE [V]	300 V	
		CONDUCTOR INSULATION MATERIAL	PVC	
		NUMBER OF CONDUCTORS [AWG]	6x14 AWG	
		TEMPERATURE RANGE	-40°C TO +105°C (-40°F TO +221°F)	
		PROTECTION CLASS	IEC IP67	
		MAXIMUM PANEL THICKNESS	6.5 [0.256]	

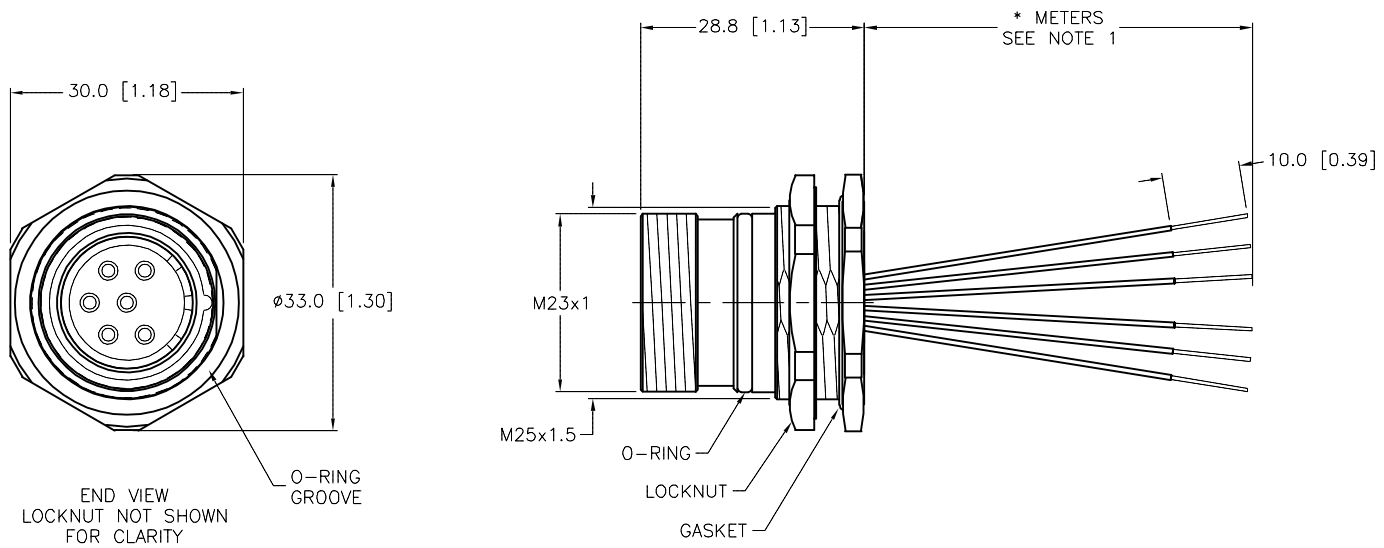


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
							
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	DD	DATE	01/14/04	DESCRIPTION CKFD 64-6-*	
SEE SPECIFICATIONS		APVD		SCALE	1 = 1.0		
FINISH		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]			IDENTIFICATION NO.	REV
SEE SPECIFICATIONS							

I	UPDATED CURRENT RATING	ER	01/16/19	66623
REV	DESCRIPTION	BY	DATE	ECO NO.