




MALE END VIEW (P1)		FEMALE END VIEW (J1)	SPECIFICATIONS	
	1 = BROWN 2 = WHITE/GREY 3 = BLUE/GREY 4 = BROWN/GREY 5 = BLACK/YELLOW 6 = WHITE/YELLOW 7 = BLUE/YELLOW 8 = BROWN/YELLOW 9 = BLACK/RED 10 = WHITE/RED 11 = BLUE/RED 12 = BROWN/RED 13 = BLACK 14 = WHITE		CONTACT CARRIER MATERIAL	NYLON or PBT
	15 = BLUE 16 = BLACK/GREY 17 = BROWN/ORANGE 18 = WHITE/ORANGE 19 = BLACK/ORANGE 20 = BLACK/GREEN 21 = WHITE/GREEN 22 = BLUE/GREEN 23 = BROWN/GREEN 24 = BLUE/ORANGE 25 = GREEN/YELLOW 26 = N/C DRAIN/SHIELD		CONTACT MATERIAL/PLATING	COPPER-ZINC ALLOY/GOLD
			CONNECTOR HOUSING MATERIAL/PLATING	COPPER-ZINC DIE CAST/NICKEL
			GASKET	RUBBER (NBR or FPM)
			RATED CURRENT [A]	3.0 A
			RATED VOLTAGE [V]	150 V
			OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBER OF CONDUCTORS [AWG]	25x22 AWG
			DRAIN/SHIELD	22 AWG/ALUM.-POLYESTER FOIL
			TEMPERATURE	-40°C TO +105°C (-40°F TO +221°F)
			PROTECTION CLASS	IEC IP67

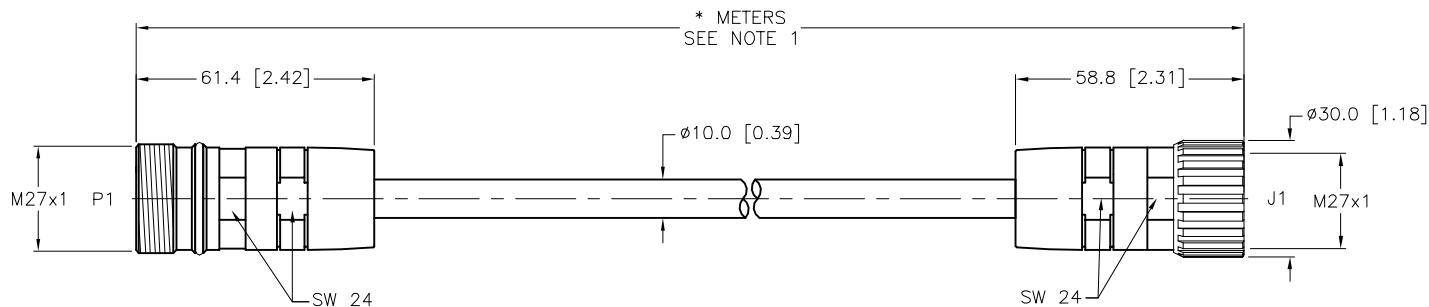


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1."*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							
MATERIAL		DRFT DD		DATE 12/31/03		DESCRIPTION DSS DK 26-631-*	
SEE SPECIFICATIONS		APVD DD		SCALE 1=2.0			
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV C	
SEE SPECIFICATIONS							
		DO NOT SCALE THIS DRAWING		FILE: 777002926		SHEET 1 OF 1	