


SPECIFICATIONS						
CONTACT CARRIER MATERIAL	TPU					
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW BRASS/GOLD					
CONTACT MATERIAL/PLATING						
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL					
RATED CURRENT [A]	10.0 A					
RATED VOLTAGE [V]	600 V PVC/YELLOW					
OUTER JACKET MATERIAL/COLOR						
CONDUCTORS	4x16 AWG					
CONDUCTOR INSULATION MATERIAL	PVC					
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)					
PROTECTION CLASS	NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K					

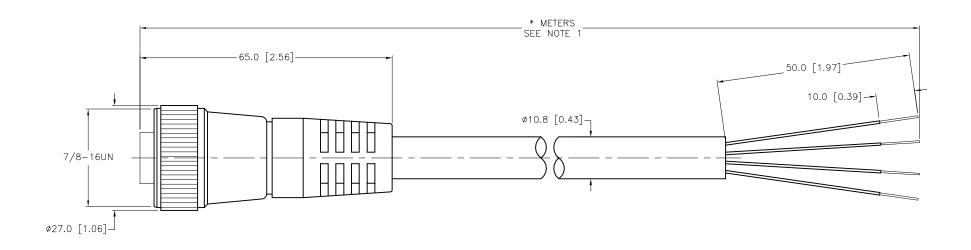

RELATED DOCUMENTS

CABLE LENGTH	TOLERANCE *				
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER				
STRIP LENGTH	TOLERANCE *				
0-7mm	±0.5mm				
8-29mm	±1.0mm				
30-49mm	±2.0mm				
50-69mm	±3.0mm				
70-100mm	±4.0mm				
OVER 100mm	±5.0mm				
* UNLESS OTHERWISE SPECIFIED					

SOURCE DRAWING - FOR REFERENCE ONLY

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300

(763) 553-0708 fax www.turck.us

REV

SHEET 1 OF 1

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC

	LENGTHS.					SPECIFICATIONS	DISPI DRAV REF
					FINISH		co
F	UPDATE PROTECTION CLASS	СВМ	04/13/21	76628	SEE	SPECIFICATIONS	"
RFV	DESCRIPTION	BY	DATE	FCO NO			

	2. 3. 4.	$\phi \Leftrightarrow$	PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		RC		1-80 (763 (763
	MATERIAL		DRFT RDS	DATE 01/07/04	DESCRIPTION	DIZM	10 *11
	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD	SCALE 1=1.0		KKM	46-*M
		DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		IDENTIFICATION NO.		
	FINISH	CONTACT TURCK	MILLIMETI	ER [INCH]	IDENTIFICATION NO.		
	SEE SPECIFICATIONS	FOR MORE INFORMATION					
Ī			DO NOT SCALE	THIS DRAWING	FILE: 777002946		

THIS DRAWING IS CONFIDENTIAL AND THE

3RD ANGLE PROJECTION