


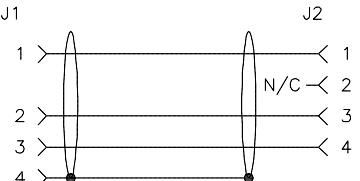


FEMALE END VIEW		FEMALE END VIEW		WIRING DIAGRAM		SPECIFICATIONS																									
 1 = BROWN 2 = WHITE 3 = BLUE 4 = DRAIN 		 1 = BROWN 2 = N/C 3 = WHITE 4 = BLUE 				<table><tr><td>CONTACT CARRIER MATERIAL</td><td>TPU OR NYLON</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/BLACK</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>2.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>125 V</td></tr><tr><td>OUTER CABLE JACKET MATERIAL/COLOR</td><td>TPU/BLACK</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>4x26 AWG</td></tr><tr><td>DRAIN/SHIELD</td><td>26 AWG/ALUM.-POLYESTER FOIL</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +80°C (-40°F to +176°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67</td></tr></table>		CONTACT CARRIER MATERIAL	TPU OR NYLON	MOLDED HEAD MATERIAL/COLOR	TPU/BLACK	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	2.0 A	RATED VOLTAGE [V]	125 V	OUTER CABLE JACKET MATERIAL/COLOR	TPU/BLACK	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	4x26 AWG	DRAIN/SHIELD	26 AWG/ALUM.-POLYESTER FOIL	TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67
CONTACT CARRIER MATERIAL	TPU OR NYLON																														
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK																														
CONTACT MATERIAL/PLATING	BRASS/GOLD																														
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																														
RATED CURRENT [A]	2.0 A																														
RATED VOLTAGE [V]	125 V																														
OUTER CABLE JACKET MATERIAL/COLOR	TPU/BLACK																														
CONDUCTOR INSULATION MATERIAL	PVC																														
NUMBER OF CONDUCTORS [AWG]	4x26 AWG																														
DRAIN/SHIELD	26 AWG/ALUM.-POLYESTER FOIL																														
TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)																														
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67																														

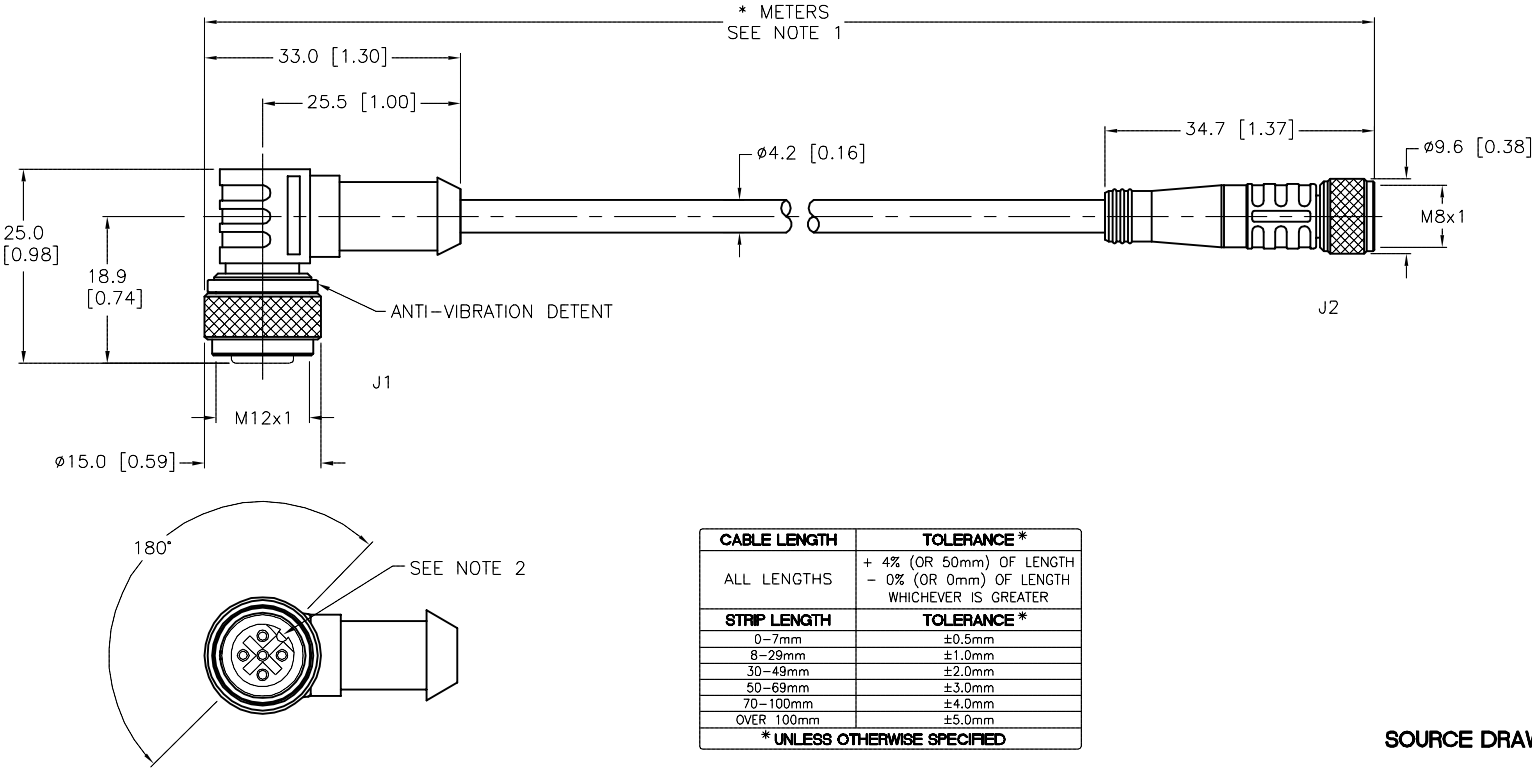

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

- NOTES:
- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
 - "/CS10807" DESIGNATES EUROFAST (M12) TO PICOFAST (M8) USING CABLE 602. CUSTOM WIRING. KEYWAY ROTATED 180° ON FEMALE EUROFAST CONNECTOR.

F	UPDATE CABLE DIAMETER	KMY	10/19/11	36135
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	DRFT JBJ	DATE 02/16/04	DESCRIPTION WK 4.4T-*--PKG 4M/CS10807
MATERIAL	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	APVD	SCALE 1=1.0	IDENTIFICATION NO.
FINISH	SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]		REV F
			DO NOT SCALE THIS DRAWING		FILE: 777002990
					SHEET 1 OF 1