


SPECIFICATIONS			
CONTACT CARRIER MATERIAL	NYLON OR TPU		
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK		
CONTACT MATERIAL/PLATING	BRASS/GOLD		
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL		
RATED CURRENT [A]	4.0 A		
RATED VOLTAGE [V]	250 V		
OUTER JACKET MATERIAL/COLOR	PVC/GREY		
CONDUCTOR INSULATION MATERIAL	PVC		
CONDUCTORS	5x18 AWG		
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)		
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K		
CABLE RATINGS	UL: ITC/PLTC/AWM, 105°C, 300 V		
	CSA: CMX-OUTDOOR-CMG/AWM, 105°C, 300 V		

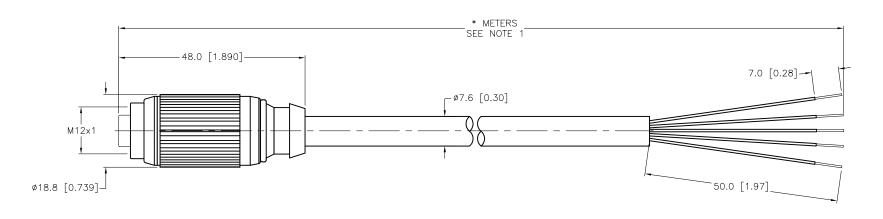

CABLE LENGTH	TOLERANCE				
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER				
STRIP LENGTH	TOLERANCE				
0-7mm	±0.5mm				
8-29mm	±1.0mm				
30-49mm	±2.0mm				
50-69mm	±3.0mm				
70-100mm	±4.0mm				
OVER 100mm	±5.0mm				

RDS 03/15/12

DATE

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

REV DESCRIPTION

UPDATE CABLE DIAMETER

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

	RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK INC High Technology Sensors and Automation Controls		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
	MATERIAL		DRFT JBJ	DATE 12/04/02	DESCRIPTION	070 *	
	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR	APVD	SCALE 1=1.0	P-RKG 5.2T-972-*		
	- FINICIA	REFERENCE ONLY	UNIT OF ME	ASUREMENT	IDENTIFICATION NO.		REV
370	FINISH 46 SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	MILLIMETE	ER [INCH]			E
ECO 1			DO NOT SCALE	THIS DRAWING	FILE: 777002991	SHEET	1 OF 1