


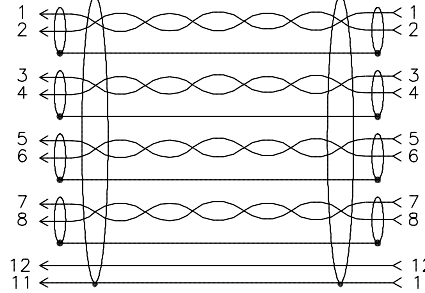


MALE END VIEW		FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 1 = WHT/BLK 2 = BLK/WHT 3 = WHT/GRN 4 = GRN/WHT 5 = WHT/RED 6 = RED/WHT 7 = WHT/ORG 8 = ORG/WHT 9 = N/C 10 = N/C 11 = DRAIN 12 = GRN/YEL  M23 connector		  M23 connector		CONTACT CARRIER MATERIAL	NYLON or PBT
1 = WHT/BLK 2 = BLK/WHT 3 = WHT/GRN 4 = GRN/WHT 5 = WHT/RED 6 = RED/WHT 7 = WHT/ORG 8 = ORG/WHT 9 = N/C 10 = N/C 11 = DRAIN 12 = GRN/YEL  M23 connector				MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
				RATED CURRENT [A]	3.0 A
				RATED VOLTAGE [V]	250 V
				OUTER JACKET MATERIAL/COLOR	PVC/PLUM
				CONDUCTOR INSULATION MATERIAL	PVC
				CONDUCTORS	8x22 AWG, 1x18 AWG GROUND
				DRAIN/SHIELD	5x22 AWG DRAINS/ALUMINUM FOIL SHIELDED
				TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
 M23 connector				PROTECTION CLASS	IEC IP67
				CONDUCTOR ARRANGEMENT	4 SHIELDED TWISTED PAIR W/DRAIN, 1 GND, 1 DRAIN
				CABLE RATINGS	UL: ITC/PLTC/AWM, 105°C, 300 V
					CSA: CMG/AWM, 105°C, 300 V

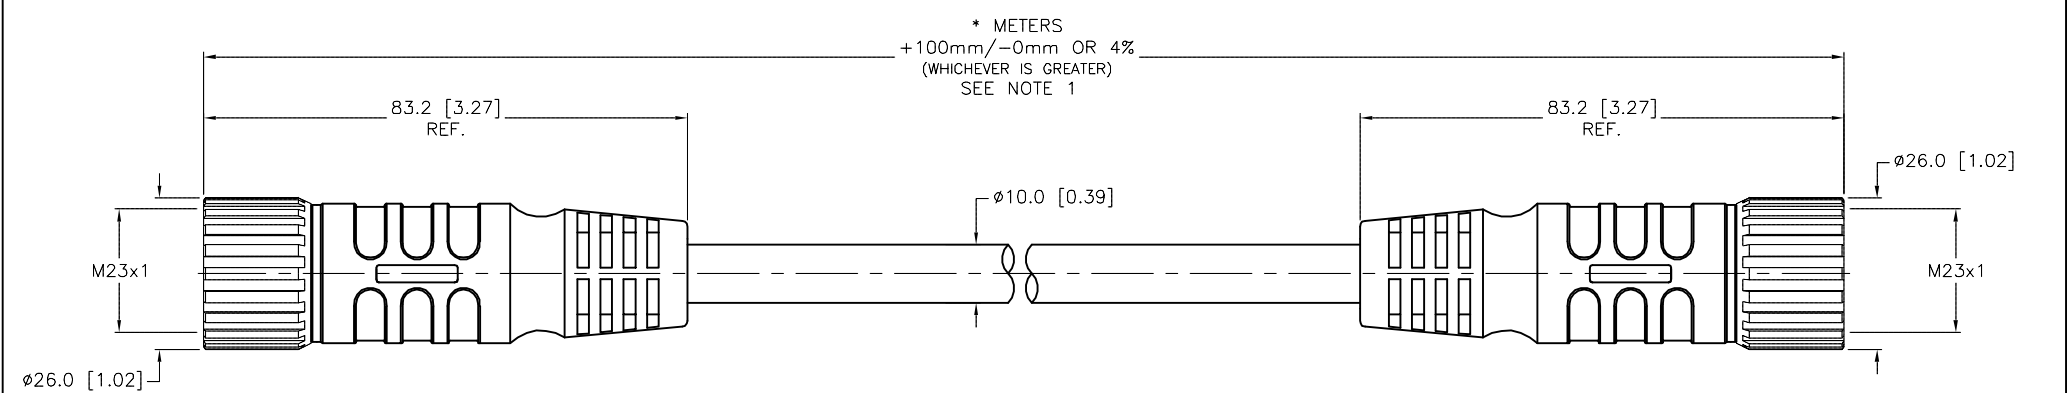

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.


D	UPDATED PROTECTION CLASS PER ECO	TV	08/18/16	56182
REV	DESCRIPTION	BY	DATE	ECO NO.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS

1.
2.
3.
4.

3RD ANGLE PROJECTION



THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

MATERIAL

SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DRFT JBJ

DATE 03/04/04

APVD

SCALE NONE

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

DESCRIPTION

P-CSMV CKMV 12-960-*

IDENTIFICATION NO.

REV

D

FILE: 777003011

SHEET 1 OF 1