

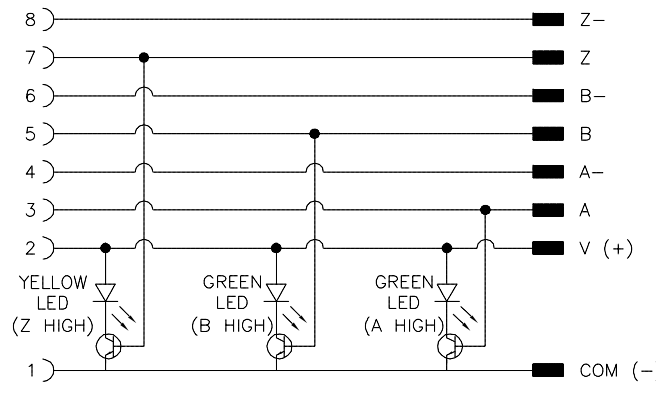
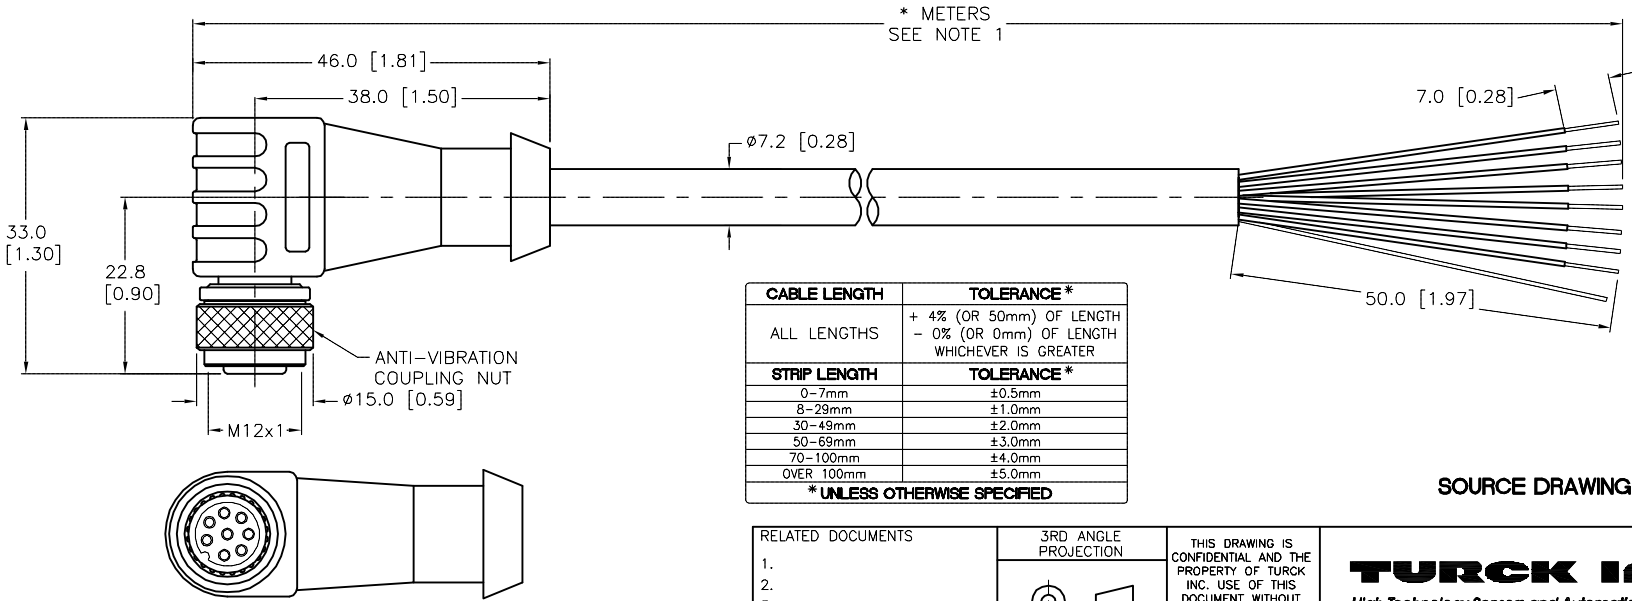


FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 1 = WHITE 2 = BROWN 3 = GREEN 4 = YELLOW 5 = GREY 6 = PINK 7 = BLUE 8 = RED		CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU
		MOLDED HEAD MATERIAL/COLOR	TPU/CLEAR
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
		RATED CURRENT [A]	2.0 A
		RATED VOLTAGE [V]	30 VDC
		SUPPLY VOLTAGE RANGE	5-30 VDC
		LED INDICATION THRESHOLD VOLTAGE	1.7 VDC
		LED CURRENT	3.0 mA
		OUTER CABLE JACKET MATERIAL/COLOR	PVC/BLACK
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	8x24 AWG
		DRAIN/SHIELD	26 AWG DRAIN/FOIL AND BRAIDED SHIELD
		TEMPERATURE RANGE	-40°C to +85°C (-40°F to +185°F)
		PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

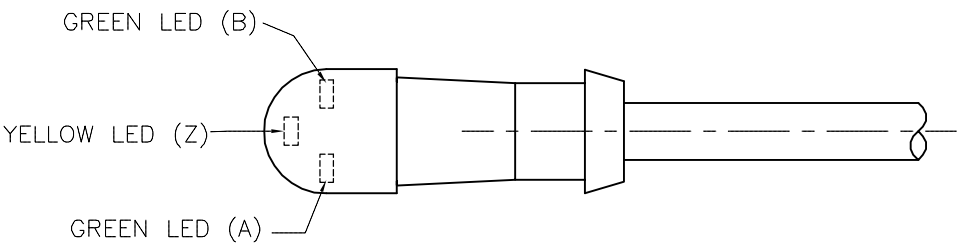


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

C	UPDATE LED LOCATION	RDS	11/10/15	51293
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 2. 3. 4.				TURCK inc <i>High Technology Sensors and Automation Controls</i>			
MATERIAL		DRFT PJ		DATE 09/13/05		DESCRIPTION	
		APVD		SCALE 1=1.0		E-WKC 8T-PX3-930-*	
		UNIT OF MEASUREMENT				IDENTIFICATION NO.	
		MILLIMETER [INCH]				REV	
FINISH		CONTACT TURCK FOR MORE INFORMATION		C			
DO NOT SCALE THIS DRAWING				FILE: 777003098		SHEET 1 OF 1	