

# NI8-EM12E-VN6X-H1141



## Inductive Sensor – With Increased Switching Distance

**Kein Maßbild vorhanden/  
No dimension drawing available**

### Features

- Threaded barrel, M12 x 1
- Stainless steel, 1.4301
- Large sensing range
- DC 4-wire, 10...30 VDC
- Changeover contact, NPN output
- M12 x 1 male connector

### Wiring diagram



### Technical data

|                                        |                                                     |
|----------------------------------------|-----------------------------------------------------|
| Type                                   | NI8-EM12E-VN6X-H1141                                |
| ID                                     | 42054953                                            |
| <b>General data</b>                    |                                                     |
| Rated switching distance               | 8 mm                                                |
| Mounting conditions                    | Non-flush                                           |
| Secured operating distance             | $\leq (0.81 \times S_n)$ mm                         |
| Correction factors                     | St37 = 1; Al = 0.3; stainless steel = 0.7; Ms = 0.4 |
| Repeat accuracy                        | $\leq 2$ % of full scale                            |
| Hysteresis                             | 3...15 %                                            |
| <b>Electrical data</b>                 |                                                     |
| Operating voltage $U_b$                | 10...30 VDC                                         |
| Ripple $U_{ss}$                        | $\leq 10$ % $U_{Bmax}$                              |
| DC rated operating current $I_o$       | $\leq 200$ mA                                       |
| No-load current                        | $\leq 15$ mA                                        |
| Residual current                       | $\leq 0.1$ mA                                       |
| Isolation test voltage                 | 0.5 kV                                              |
| Short-circuit protection               | yes/Cyclic                                          |
| Voltage drop at $I_o$                  | $\leq 1.8$ V                                        |
| Wire break/reverse polarity protection | yes/Complete                                        |
| Output function                        | 4-wire, Complementary contact, NPN                  |
| Switching frequency                    | 2 kHz                                               |
| <b>Mechanical data</b>                 |                                                     |
| Design                                 | Threaded barrel, M12 x 1                            |

### Functional principle


Inductive sensors detect metal objects contactless and wear-free. For this, they use a high-frequency electromagnetic AC field that interacts with the target. Inductive sensors generate this field via an RLC circuit with a ferrite coil.

Technical data

|                                       |                                            |
|---------------------------------------|--------------------------------------------|
| Dimensions                            | 62 mm                                      |
| Housing material                      | Stainless steel, 1.4301 (AISI 304)         |
| Active area material                  | Plastic, PA12-GF30                         |
| Max. tightening torque of housing nut | 10 Nm                                      |
| Electrical connection                 | Connector, M12 × 1                         |
| Environmental conditions              |                                            |
| Ambient temperature                   | -25...+70 °C                               |
| Vibration resistance                  | 55 Hz (1 mm)                               |
| Shock resistance                      | 30 g (11 ms)                               |
| Protection class                      | IP67                                       |
| MTTF                                  | 2283 years acc. to SN 29500 (Ed. 99) 40 °C |
| Switching state                       | LED, Yellow                                |

Mounting instructions

| Mounting instructions/Description |
|-----------------------------------|
|-----------------------------------|

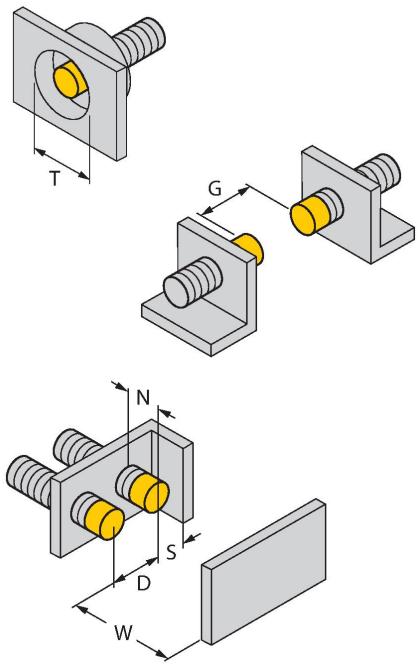

|                        |         |
|------------------------|---------|
| Distance D             | 3 x B   |
| Distance W             | 3 x Sn  |
| Distance T             | 3 x B   |
| Distance S             | 1.5 x B |
| Distance G             | 6 x Sn  |
| Distance N             | 2 x Sn  |
| Diameter active area B | Ø 12 mm |

N18-EM12E-VN6X-H1141 | 02/21/2025 13-51 | technical changes reserved

## Accessories

BST-12B

6947212

Mounting clamp for threaded barrel sensors, with dead-stop; material: PA6



QM-12

6945101


Quick-mount bracket with dead-stop; material: Chrome-plated brass. Male thread M16 × 1. Note: The switching distance of the proximity switches may change when using quick-mount brackets.



MW12

6945003

Mounting bracket for threaded barrel sensors; material: Stainless steel A2 1.4301 (AISI 304)



BSS-12

6901321

Mounting clamp for smooth and threaded barrel sensors; material: Polypropylene

