


SPECIFICATIONS			
CONTACT CARRIER MATERIAL	TPU		
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW		
CONTACT MATERIAL/PLATING	BRASS/GOLD		
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL		
RATED CURRENT [A]	9.0 A		
RATED VOLTAGE [V]	600 V		
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW		
CONDUCTOR INSULATION MATERIAL	PVC		
NUMBER OF CONDUCTORS [AWG]	5x18 AWG		
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)		
PROTECTION CLASS	NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K		

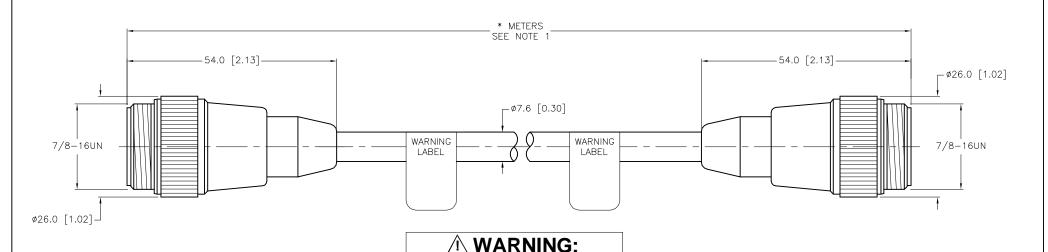

CABLE LENGTH TOLERANCE* + 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH ALL LENGTHS WHICHEVER IS GREATER STRIP LENGTH TOLERANCE* 0-7mm ±0.5mm 8-29mm ±1.0mm 30-49mm ±2.0mm 50-69mm 70-100mm ±3.0mm ±4.0mm OVER 100mm ±5.0mm * UNLESS OTHERWISE SPECIFIED

ELECTRICAL SHOCK HAZARD CONNECTOR IS TO BE IN THE THE

MATED STATE WHILE ENERGIZED REMOVE POWER BEFORE SERVICING.

SOURCE DRAWING - FOR REFERENCE ONLY

FILE: 777003350

SHEET 1 OF 1

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.)	RCI		MN 55441 4-7769 5-7300 5-0708 fax
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR	APVD T.S.	DATE 05/04/17 SCALE 1=1.0	DESCRIPTION RSM	RSM 50-*M	
FINISH	REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV

DO NOT SCALE THIS DRAWING

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

С	UPDATE PROTECTION CLASS	СВМ	04/13/21	76628
REV	DESCRIPTION	BY	DATE	ECO NO.