




FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS																							
																											
1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 5 = N/C		1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 5 = N/C																									
																											
				<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON OR TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/BLUE-GRAY</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>250 V</td></tr><tr><td>OUTER CABLE JACKET MATERIAL/COLOR</td><td>TPE/GRAY</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>POLYESTER ELASTOMER</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>4x22 AWG</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>NEMA 1,3,4,6P AND IEC IP68, IP69K</td></tr></table>		CONTACT CARRIER MATERIAL	NYLON OR TPU	MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	250 V	OUTER CABLE JACKET MATERIAL/COLOR	TPE/GRAY	CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER	NUMBER OF CONDUCTORS [AWG]	4x22 AWG	TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K
CONTACT CARRIER MATERIAL	NYLON OR TPU																										
MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY																										
CONTACT MATERIAL/PLATING	BRASS/GOLD																										
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																										
RATED CURRENT [A]	4.0 A																										
RATED VOLTAGE [V]	250 V																										
OUTER CABLE JACKET MATERIAL/COLOR	TPE/GRAY																										
CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER																										
NUMBER OF CONDUCTORS [AWG]	4x22 AWG																										
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)																										
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K																										

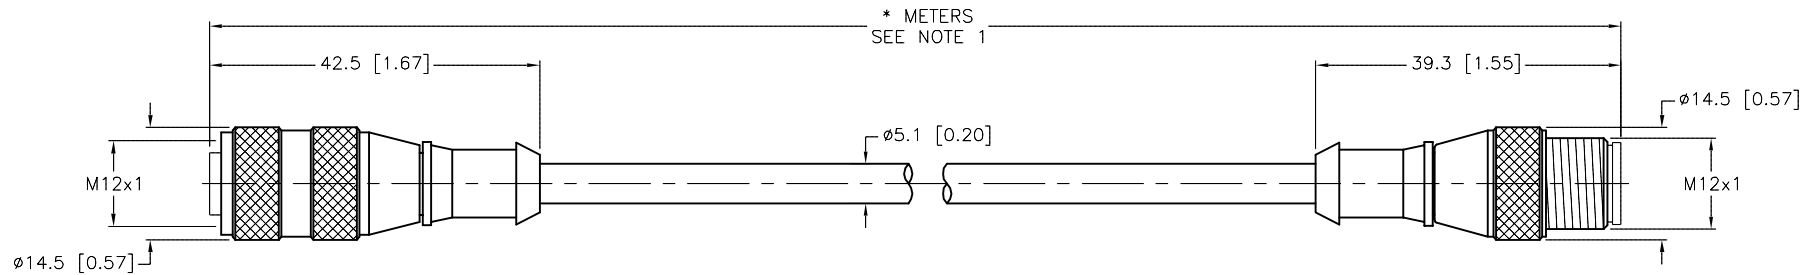


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. "/S101" DESIGNATE FLEXLIFE-20 AND C-TRACK CABLE.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.				DRFT RWC		DATE 09/28/07	
MATERIAL		SEE SPECIFICATIONS		APVD		SCALE 1=1.0	
FINISH		SEE SPECIFICATIONS		UNIT OF MEASUREMENT		DESCRIPTION	
				MILLIMETER [INCH]		WAKW 4.4T-*--WASW 4.4T/S101	
				DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
						REV	
						G	
G UPDATE SOURCE DRAWING-ADD CTRACK TO /S101 NOTE		CBM 02/18/14		44634		FILE: 777003906	
REV DESCRIPTION		BY DATE		ECO NO.		SHEET 1 OF 1	