




FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS																							
 1 = BROWN 2 = BLUE 3 = N/C 4 = N/C 	 1 = BROWN 2 = BLUE 3 = N/C 4 = N/C 	<table><tr><td>CONTACT CARRIER MATERIAL/COLOR</td><td>NYLON OR TPU/YELLOW</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/YELLOW</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>250 V</td></tr><tr><td>OUTER CABLE JACKET MATERIAL/COLOR</td><td>TPU/BLUE</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>2x20 AWG</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +90°C (-40°F to +194°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP68</td></tr></table>	CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/YELLOW	MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	250 V	OUTER CABLE JACKET MATERIAL/COLOR	TPU/BLUE	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	2x20 AWG	TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68	
CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/YELLOW																								
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW																								
CONTACT MATERIAL/PLATING	BRASS/GOLD																								
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																								
RATED CURRENT [A]	4.0 A																								
RATED VOLTAGE [V]	250 V																								
OUTER CABLE JACKET MATERIAL/COLOR	TPU/BLUE																								
CONDUCTOR INSULATION MATERIAL	PVC																								
NUMBER OF CONDUCTORS [AWG]	2x20 AWG																								
TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)																								
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68																								

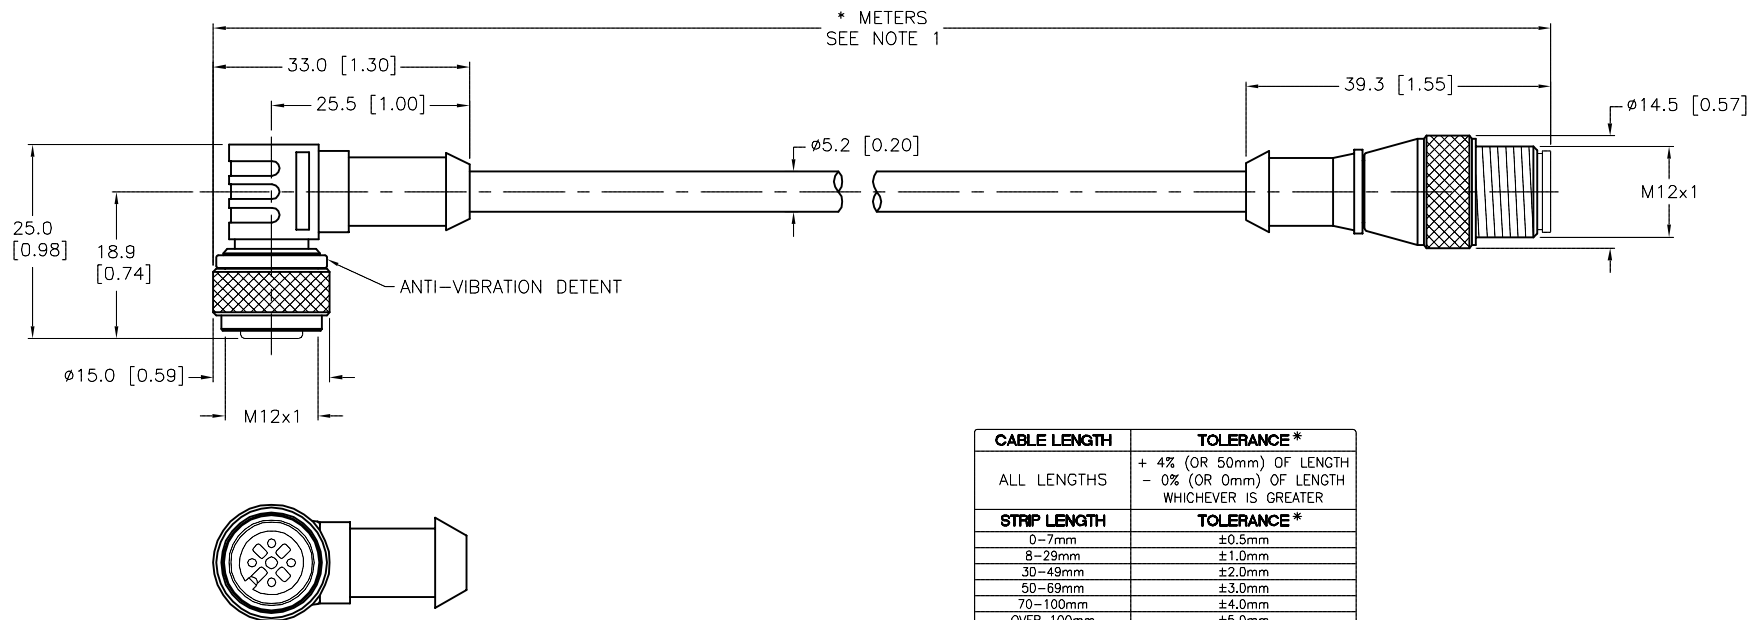


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
		DRFT	RWC	DATE	09/28/07
		DSGN		SCALE	1=1.0
		UNIT OF MEASUREMENT		DESCRIPTION	
MATERIAL	SEE SPECIFICATIONS	MILLIMETER [INCH]		WK 4.21T-*--RS 4.21T/S90	
FINISH	SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION		IDENTIFICATION NO.	
DO NOT SCALE THIS DRAWING		FILE: 777003915		REV D	
DRAWING PROCESSED AS PART OF ECO 33971		BY		DATE	
ECO NO.		33971		SHEET 1 OF 1	