



MALE END VIEW



1 = BROWN
2 = WHITE
3 = BLUE
4 = BLACK




1 = BROWN
2 = WHITE
3 = BLUE
4 = BLACK



SPECIFICATIONS

CONTACT CARRIER MATERIAL	TPU OR NYLON
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
OUTER CABLE JACKET MATERIAL/COLOR	PVC/GRAY
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	4x22 AWG
DRAIN/SHIELD	24 AWG DRAIN/ALUMI./POLYESTER FOIL SHIELD
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

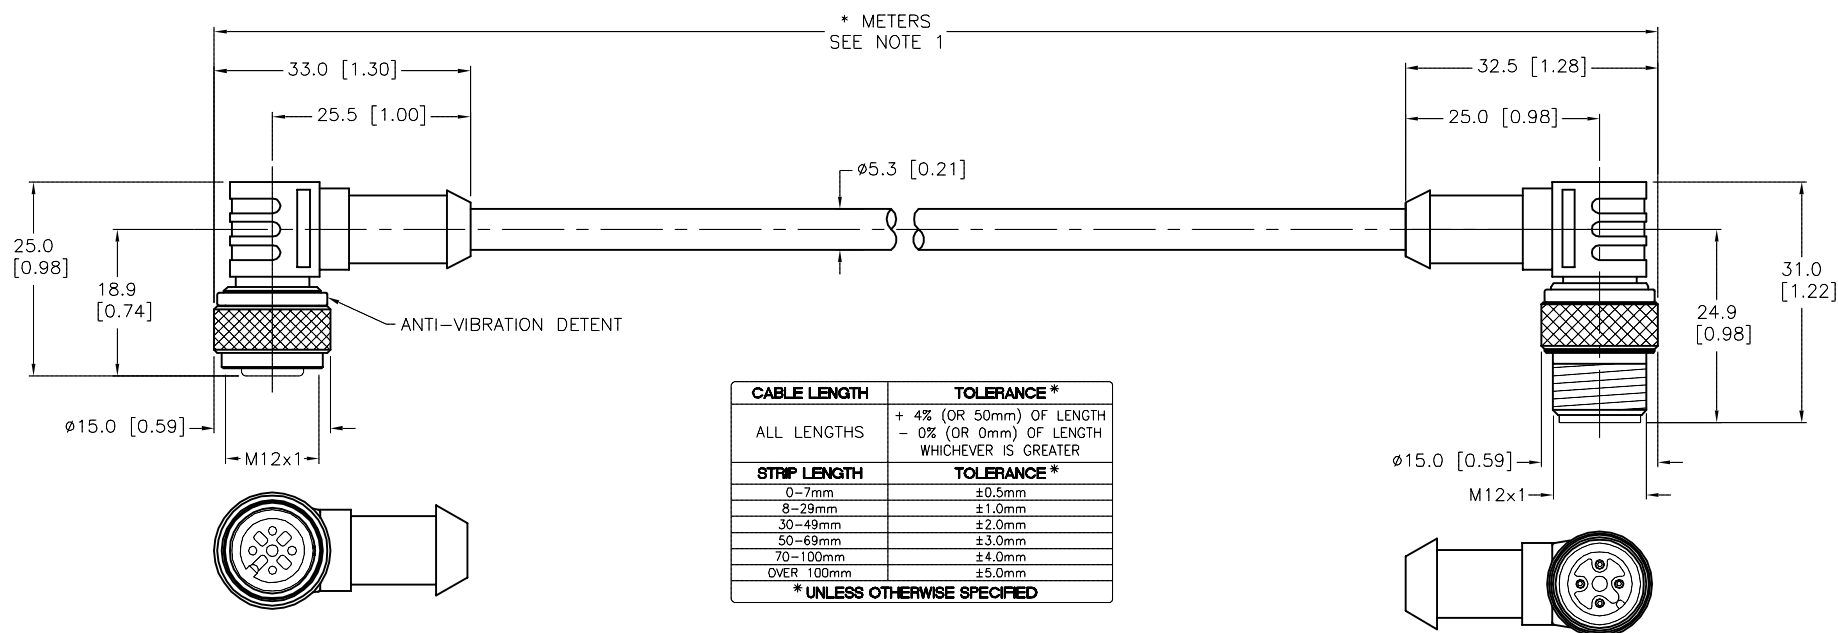


SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/S618" DESIGNATES CABLE WITH ALUMINIZED-POLYESTER SHIELD AND DRAIN WIRE. DRAIN IS NOT CONNECTED AT THE MOLDED END.

RELATED DOCUMENTS		3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us					
1.											
2.											
3.											
4.											
MATERIAL		DRFT		TR	DATE	09/17/07			DESCRIPTION		
SEE SPECIFICATIONS		APVD			SCALE	1=1.0			WK 4.4T-*--WS 4.4T/S618		
		UNIT OF MEASUREMENT									
FINISH		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		CONTACT TURCK FOR MORE INFORMATION		MILLIMETER [INCH]			IDENTIFICATION NO.		REV
SEE SPECIFICATIONS									E		
						DO NOT SCALE THIS DRAWING			FILE: 777003948		SHEET 1 OF

E	UPDATE MALE COUPLING NUT	RDS	04/19/18	56903
REV	DESCRIPTION	BY	DATE	ECO NO.