


FEMALE END VIEW




1 = BROWN  
2 = BLUE  
3 = N/C  
4 = N/C



## SPECIFICATIONS

|                                   |                                   |
|-----------------------------------|-----------------------------------|
| CONTACT CARRIER MATERIAL          | NYLON OR TPU                      |
| MOLDED HEAD MATERIAL/COLOR        | TPU/YELLOW                        |
| CONTACT MATERIAL/PLATING          | BRASS/GOLD                        |
| COUPLING NUT MATERIAL/COLOR       | NYLON/BLACK                       |
| RATED CURRENT [A]                 | 4.0 A                             |
| RATED VOLTAGE [V]                 | 250 V                             |
| OUTER CABLE JACKET MATERIAL/COLOR | PVC/BLUE                          |
| CONDUCTOR INSULATION MATERIAL     | PVC                               |
| NUMBER OF CONDUCTORS [AWG]        | 2x20 AWG                          |
| TEMPERATURE RANGE                 | -40°C to +105°C (-40°F to +221°F) |
| PROTECTION CLASS                  | MEETS NEMA 1,3,4,6P AND IEC IP68  |

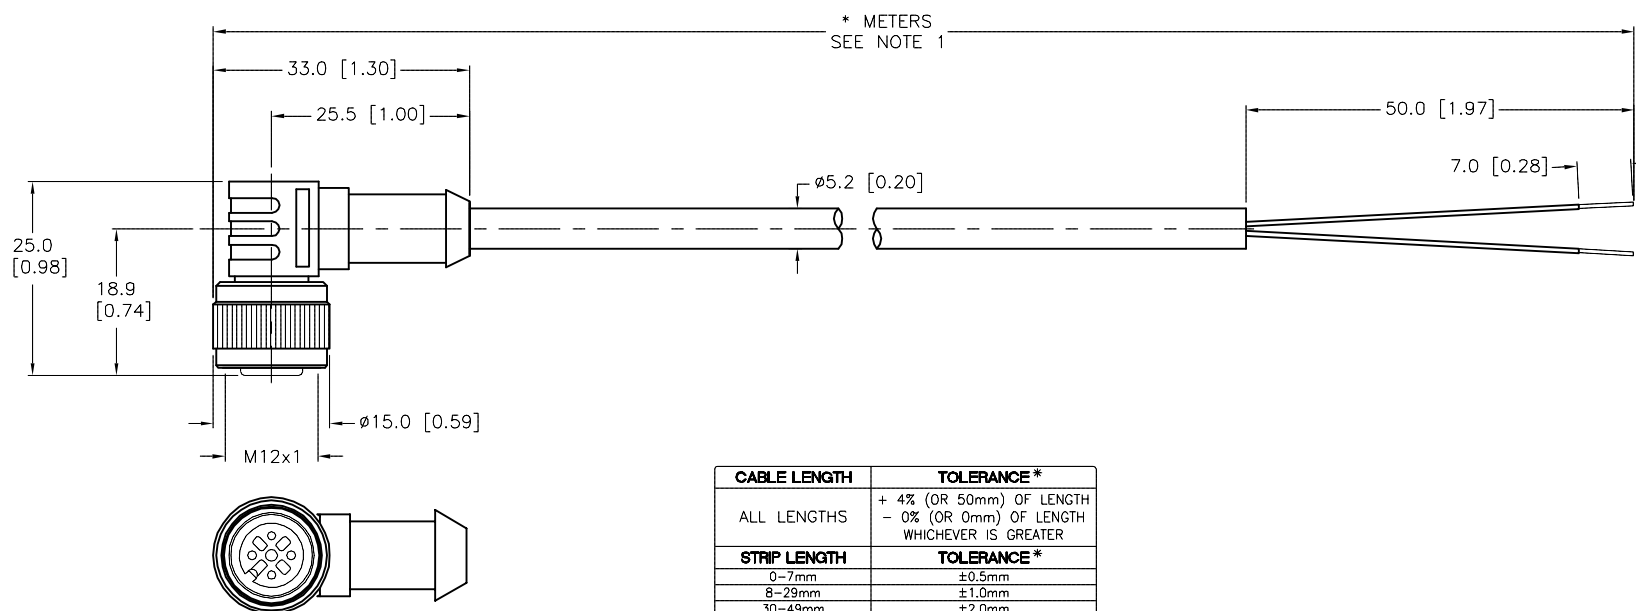


| CABLE LENGTH                 | TOLERANCE *   |
|------------------------------|---|
| ALL LENGTHS                  | + 4% (OR 50mm) OF LENGTH<br>- 0% (OR 0mm) OF LENGTH<br>WHICHEVER IS GREATER |
| STRIP LENGTH                 | TOLERANCE *   |
| 0-7mm                        | ±0.5mm  |
| 8-29mm                       | ±1.0mm  |
| 30-49mm                      | ±2.0mm  |
| 50-69mm                      | ±3.0mm  |
| 70-100mm                     | ±4.0mm  |
| OVER 100mm                   | ±5.0mm  |
| * UNLESS OTHERWISE SPECIFIED |   |

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

|   |  |   |     |   |                    |                                |
|---|--|---|-----|---|--------------------|--------------------------------|
| RELATED DOCUMENTS<br><br>1.<br><br>2.<br><br>3.<br><br>4. | 3RD ANGLE<br>PROJECTION  | <div>THIS DRAWING IS<br/>CONFIDENTIAL AND THE<br/>PROPERTY OF TURCK<br/>INC. USE OF THIS<br/>DOCUMENT WITHOUT<br/>WRITTEN PERMISSION IS<br/>PROHIBITED.</div> |     | <div><div>TURCK INC</div><div>High Technology Sensors and Automation Controls</div></div> <div>3000 CAMPUS DRIVE<br/>MINNEAPOLIS, MN 55441<br/>1-800-544-7769<br/>(763) 553-7300<br/>(763) 553-0708 fax<br/>turck.com</div> |                    |                                |
|   |                                     |   |     |   |                    |                                |
|   | MATERIAL   | DRFT  | RWC | DATE  | 11/08/07           | DESCRIPTION<br><br>WKK 4.21T-* |
|   | SEE SPECIFICATIONS   | DSGN  |     | SCALE   | 1=1.0              |                                |
| FINISH  | ALL DIMENSIONS<br>DISPLAYED ON THIS<br>DRAWING ARE FOR<br>REFERENCE ONLY<br><br>CONTACT TURCK<br>FOR MORE<br>INFORMATION | UNIT OF MEASUREMENT<br><br>MILLIMETER [ INCH ]  |     |   | IDENTIFICATION NO. | REV<br><br>C                   |
| SEE SPECIFICATIONS  |  | DO NOT SCALE THIS DRAWING   |     |   |                    |                                |
|   |  | FILE: 777004007   |     |   | SHEET 1 OF         |                                |

|     |  |     |          |         |
|-----|--|-----|----------|---------|
| C   | DRAWING PROCESSED AS PART OF ECO 33971 | CBM | 04/06/11 | 33971   |
| REV | DESCRIPTION                            | BY  | DATE     | ECO NO. |