


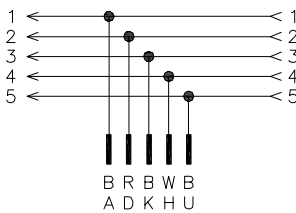


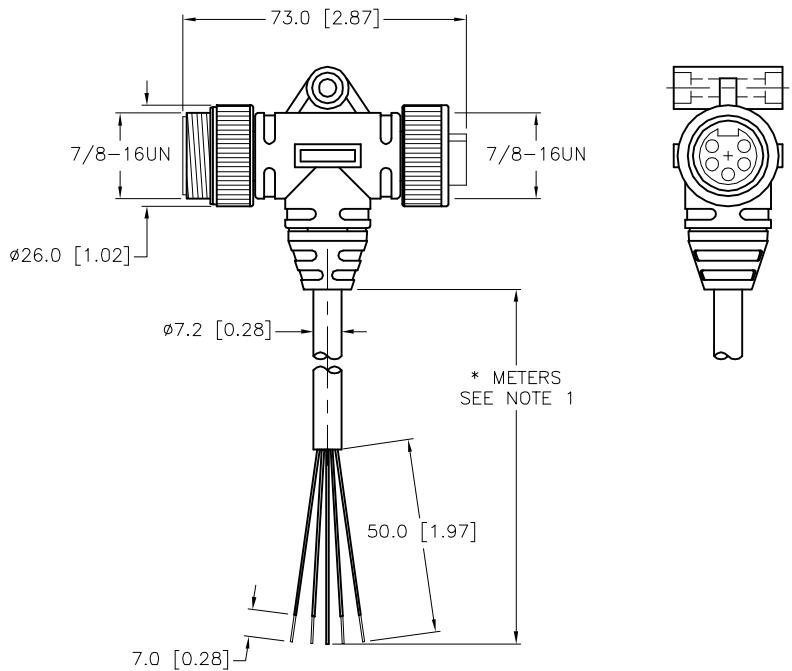


MALE END VIEW		FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
				CONTACT CARRIER MATERIAL/COLOR	TPU/BLE-GRAY
				MOLDED HEAD MATERIAL/COLOR	TPU/BLE-GRAY
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
				RATED CURRENT [A]	9.0 A (TRUNK), 4.0 A (DROP CABLE)
				RATED VOLTAGE [V]	250 V
				OUTER JACKET MATERIAL/COLOR	PVC/GRAY
				CONDUCTOR INSULATION MATERIAL	HDPE (DATA), SRPVC (POWER)
				CONDUCTORS [AWG]	4x22 AWG, 22 AWG DRAIN
				SHIELDING	FOIL (PAIRS), FOIL (OVERALL)
				TEMPERATURE RATING	-40°C to +80°C (-40°F to +176°F)
				PROTECTION CLASS	NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K

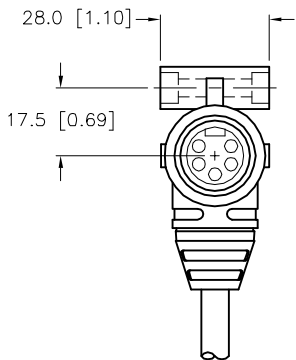


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

* UNLESS OTHERWISE SPECIFIED

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.				DRFT RDS		DATE 04/27/04	
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=2.0	
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION RSM 57-572-*M-RKM 57	
E UPDATE PROTECTION CLASS		CBM 04/13/21 76628		DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
REV DESCRIPTION		BY DATE ECO NO.		FILE: 777004217		REV E	
						SHEET 1 OF 1	