


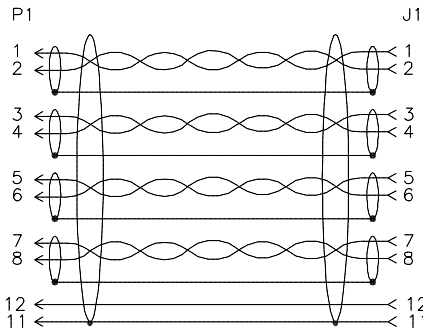



MALE END VIEW		FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 1 = WHT/BLK 2 = BLK/WHT 3 = WHT/GRN 4 = GRN/WHT 5 = WHT/RED 6 = RED/WHT 7 = WHT/ORG 8 = ORG/WHT 9 = N/C 10 = N/C 11 = DRAIN 12 = GRN/YEL				CONTACT CARRIER MATERIAL	NYLON or PBT
 M23 connector		 M23 connector		MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
				RATED CURRENT [A]	3.0 A
				RATED VOLTAGE [V]	300 V
				OUTER JACKET MATERIAL/COLOR	PVC/BLUE
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS [AWG]	8x22 AWG, 1x18 AWG GROUND
				DRAIN/SHIELD	4X24, 1X22 AWG/ALUMINUM-POLYESTER FOIL
				TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	MEETS IEC IP67
				CONDUCTOR ARRANGEMENT	4 SHIELDED TWISTED PAIR W/DRAIN, 1 GND, 1 DRAIN
				CABLE RATINGS	UL: ITC/PLTC/AWM, 105C, 300 V CSA: CMX-OUTDOOR-CMG/AWM, 105C, 300 V

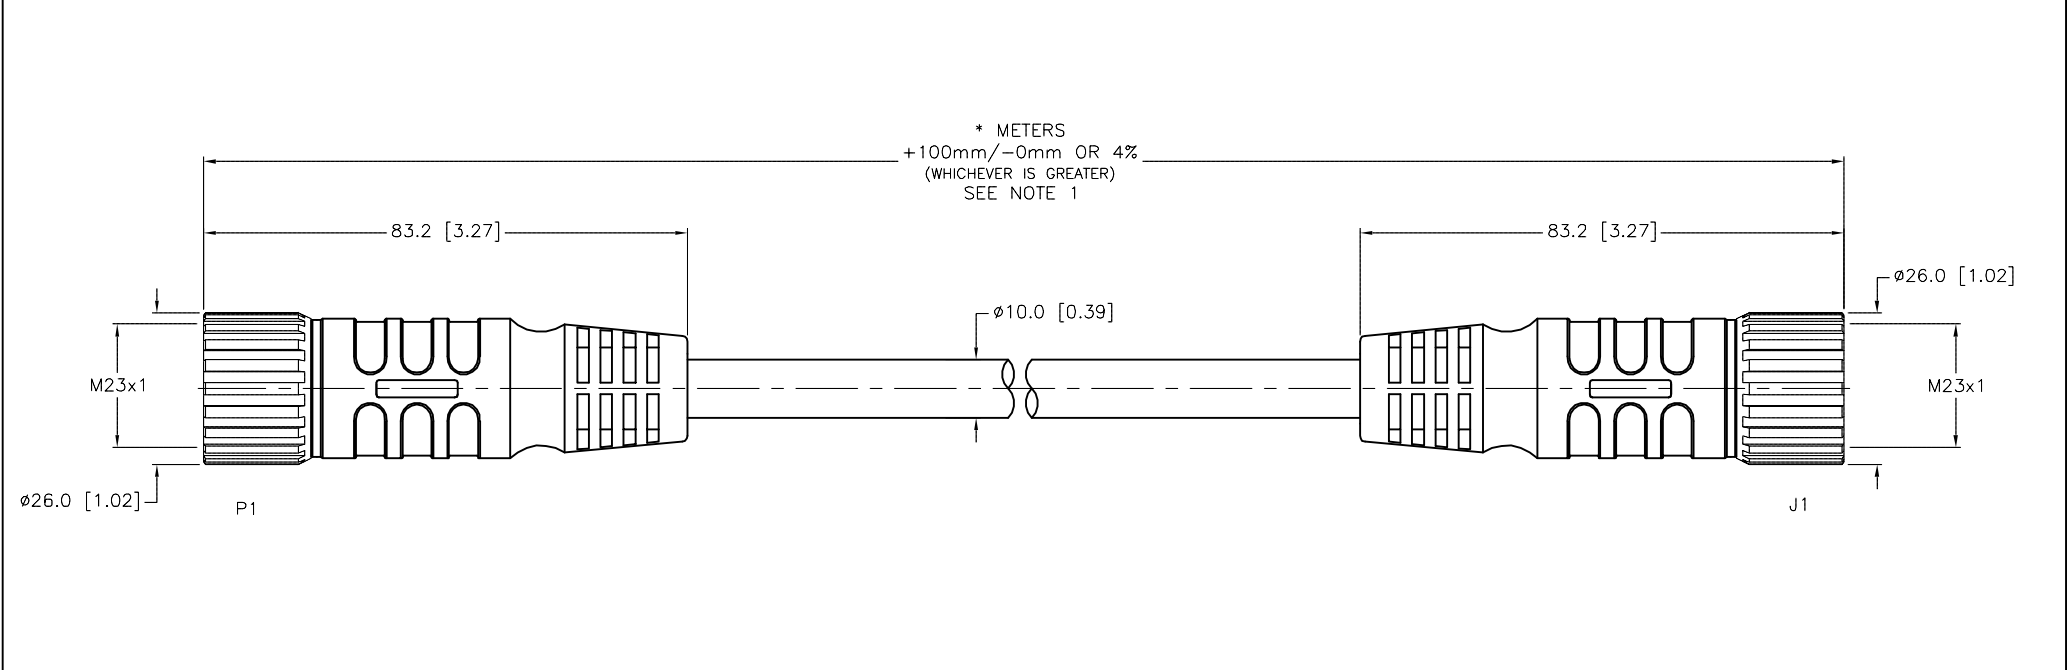

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							DRFT DD		DATE 05/20/04	
MATERIAL					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=1.3	
FINISH					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
SEE SPECIFICATIONS					DO NOT SCALE THIS DRAWING		MILLIMETER [INCH]		P-CSMV CKMV 12-978-*	
SEE SPECIFICATIONS									IDENTIFICATION NO.	
									REV	
									G	
G	UPDATED DRAIN SPECS PER ECO	TV	03/02/16	53780					FILE: 777004389	
REV	DESCRIPTION	BY	DATE	ECO NO.					SHEET 1 OF 1	