


BI10-EGT18F-AP6X-H1141/S1589

Inductive Sensor – Stainless Steel Front

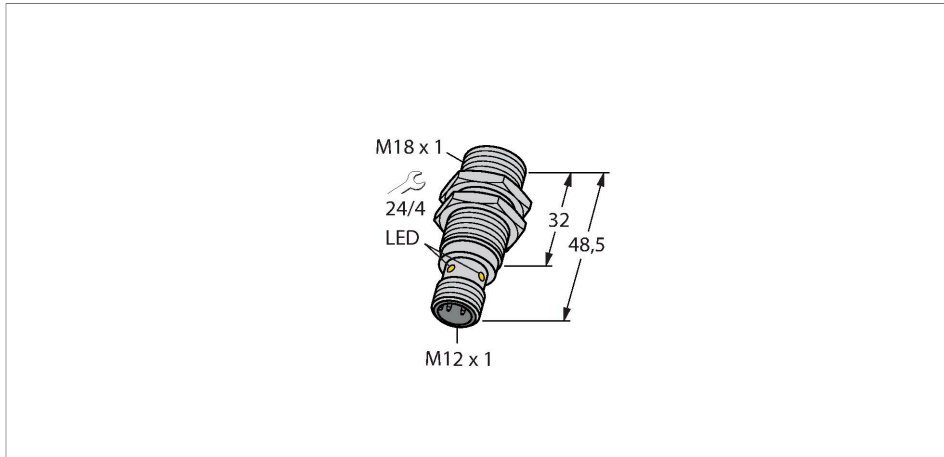

Features

- M18 × 1 threaded barrel
- Stainless steel, 1.4305, PTFE-coated
- DC 3-wire, 10...30 VDC
- NO contact, PNP output
- M12 x 1 male connector

Wiring diagram



Technical data

Type	BI10-EGT18F-AP6X-H1141/S1589
ID	46147081
Special version	S1589 Corresponds to: With weldguard coating
General data	
Rated switching distance	10 mm
Mounting conditions	Flush
Secured operating distance	≤ (0.81 × S _n) mm
Correction factors	St37 = 1; Al = 1; Cu=0.8; stainless steel 1mm = 0.5; stainless steel 2mm = 0.9; Ms = 1.2
Repeat accuracy	≤ 5 % of full scale
Hysteresis	3 %
Electrical data	
Operating voltage U _B	10...30 VDC
Ripple U _{ss}	≤ 20 % U _{Bmax}
DC rated operating current I _e	≤ 200 mA
No-load current	≤ 10 mA
Residual current	≤ 0.1 mA
Isolation test voltage	0.5 kV
Short-circuit protection	yes/Cyclic
Voltage drop at I _e	≤ 2 V
Wire break/reverse polarity protection	yes/Complete
Output function	3-wire, NO contact, PNP
Switching frequency	0.2 kHz

Functional principle

The inductive all-metal switches operate on the basis of the electromagnetic pulse method. Unlike standard inductive sensors, the magnetic field is not generated through oscillation but through short, periodic current pulses flowing through the coil. The magnetic field induces voltage in the object to be detected, which, for its part creates a current flow in this object. After switching off the current pulse, the current in the object also drops, now inducing voltage back in the emitter coil. This voltage is the wanted signal and remains unaffected by energy dissipation in the magnetic field. Only non-ferromagnetic or poorly conductive metals provide a low signal.

Technical data

Mechanical data	
Design	Threaded barrel, M18 x 1
Dimensions	48.5 mm
Housing material	Stainless steel, 1.4305 (AISI 303), PTFE-coated
Active area material	Stainless steel, PTFE, PTFE-coated
Admissible pressure on front cap	≤ 60 bar
Max. tightening torque of housing nut	50 Nm
Electrical connection	Connector, M12 × 1
Environmental conditions	
Ambient temperature	-25...+70 °C
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP68 IP69K
MTTF	377 years acc. to SN 29500 (Ed. 99) 20 °C
Switching state	LED, Yellow, LED flashing: 0.8 s, < s ≤ s,

Mounting instructions

Mounting instructions/Description



Distance D 60 mm

Distance W 30 mm

Distance T 54 mm

Distance S 25 mm

Distance G 60 mm

Diameter active area B \varnothing 18 mm

The following reduction factors apply when flush-mounted in:

Steel: 0.75

Aluminium: 0.9


Brass: 0.75

Stainless steel: 0.8

Accessories

MW18


6945004

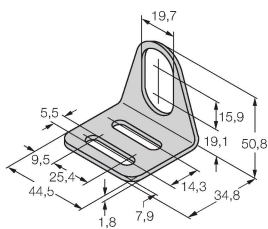

Mounting bracket for threaded barrel sensors; material: Stainless steel A2 1.4301 (AISI 304)

BSS-18


6901320



Mounting clamp for smooth and threaded barrel sensors; material: Polypropylene

QM-18

6945102



Quick-mount bracket with dead-stop; material: Chrome-plated brass. Male thread M24 x 1.5. Note: The switching distance of the proximity switches may change when using quick-mount brackets.