

MALE END VIEW

1 = N/C

2 = N/C

3 = BUS_B (RED)

4 = N/C

5 = N/C

6 = N/C

7 = N/C

8 = BUS_A (GREEN)

9 = N/C

WIRING DIAGRAM

GRN → 8

RED → 3

BARE → CONN. SHELL


GRN → 8

RED → 3

BARE → CONN. SHELL

SPECIFICATIONS

OUTER JACKET MATERIAL/COLOR	TPU/VIOLET
CONDUCTOR INSULATION MATERIAL	POLYETHYLENE
NUMBER OF CONDUCTORS [AWG]	2x22 AWG (SHIELDED DATA PAIR WITH 22 AWG DRAIN)
SHIELDING	ALUM. MYLAR PLUS TINNED COPPER BRAIDED
TEMPERATURE RANGE (D9S)	-25°C to +60°C (-13°F to +140°F)
PROTECTION CLASS	IP20
INCLUDES PROFIBUS TERMINATING RESISTOR	YES

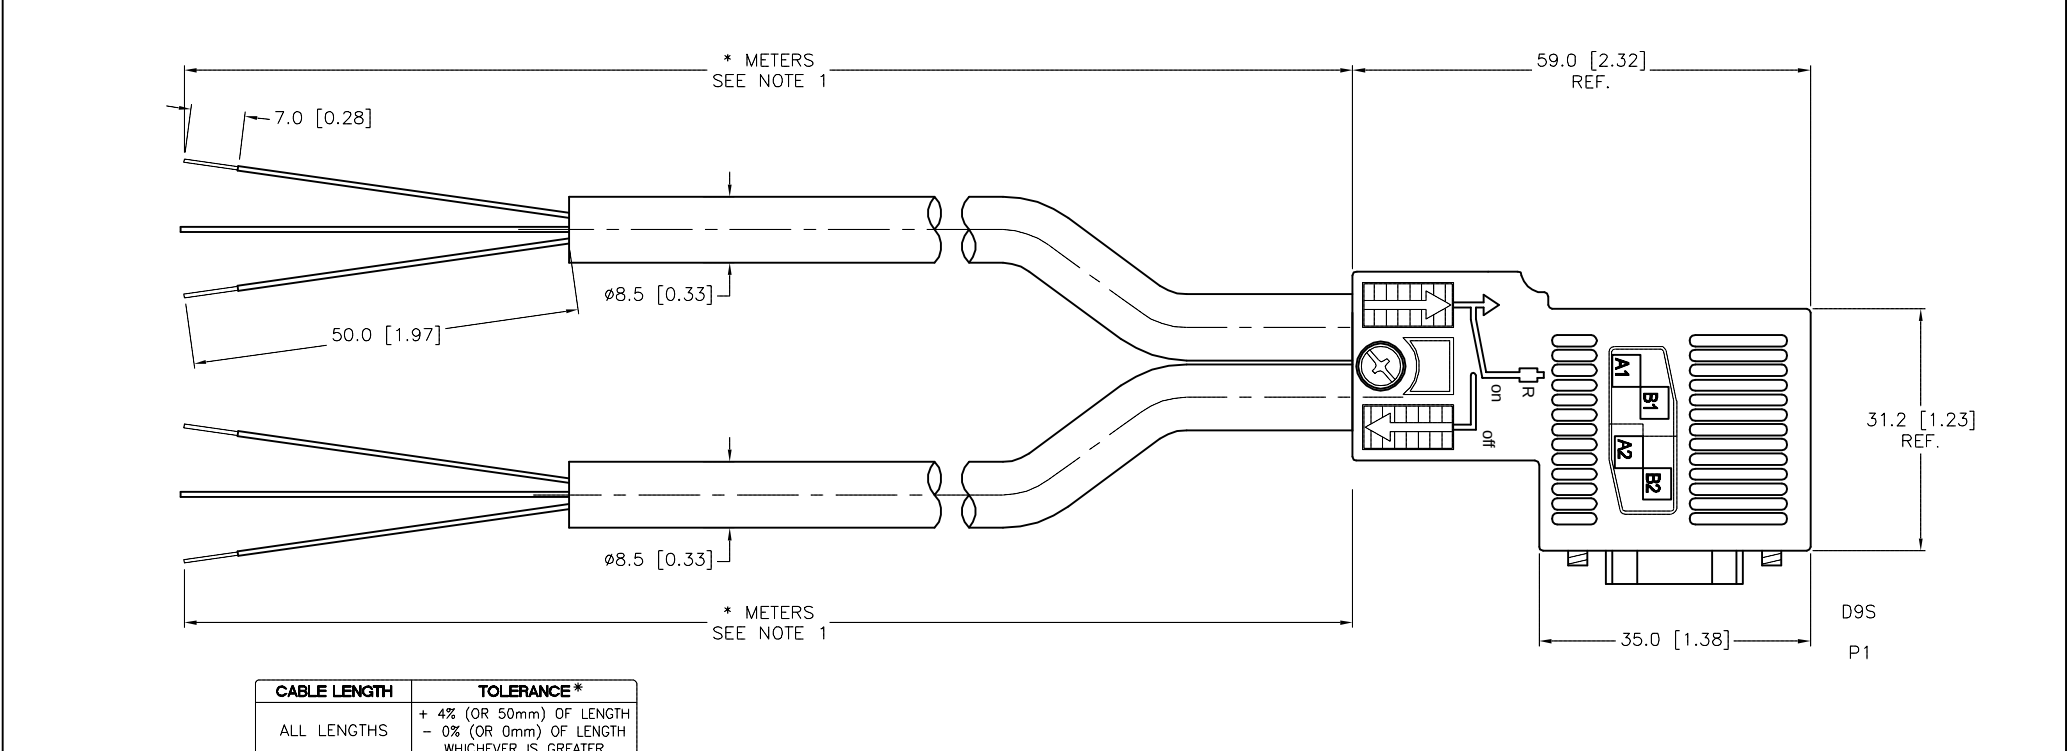

GENERAL NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS

1.

2.

3.

4.

MATERIAL

FINISH

3RD ANGLE PROJECTION

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT CBM

DSGN

DATE 03/02/00

SCALE 1=1.0

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

TURCK INC

High Technology Sensors and Automation Controls

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
turck.com

DESCRIPTION

D9S 455-*M-*M

IDENTIFICATION NO.

REV

F

FILE: 777005655

SHEET 1 OF 1

F	REMOVE RATED CURRENT AND VOLTAGE	CK	05/02/11	34896
REV	DESCRIPTION	BY	DATE	ECO NO.