





FEMALE END VIEW




1 = N/C  
2 = GREEN (BUS\_A)  
3 = N/C  
4 = RED (BUS\_B)  
5 = BARE (SHIELD)



1 = N/C  
2 = GREEN (BUS\_A)  
3 = N/C  
4 = RED (BUS\_B)  
5 = BARE (SHIELD)




SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON or TPU
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
OUTER JACKET MATERIAL/COLOR	PVC/VIOLET
CONDUCTOR INSULATION MATERIAL	POLYETHYLENE
NUMBER OF CONDUCTORS [AWG]	2x22 AWG + 22 AWG DRAIN
TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)
PROTECTION CLASS	MEETS IEC IP67

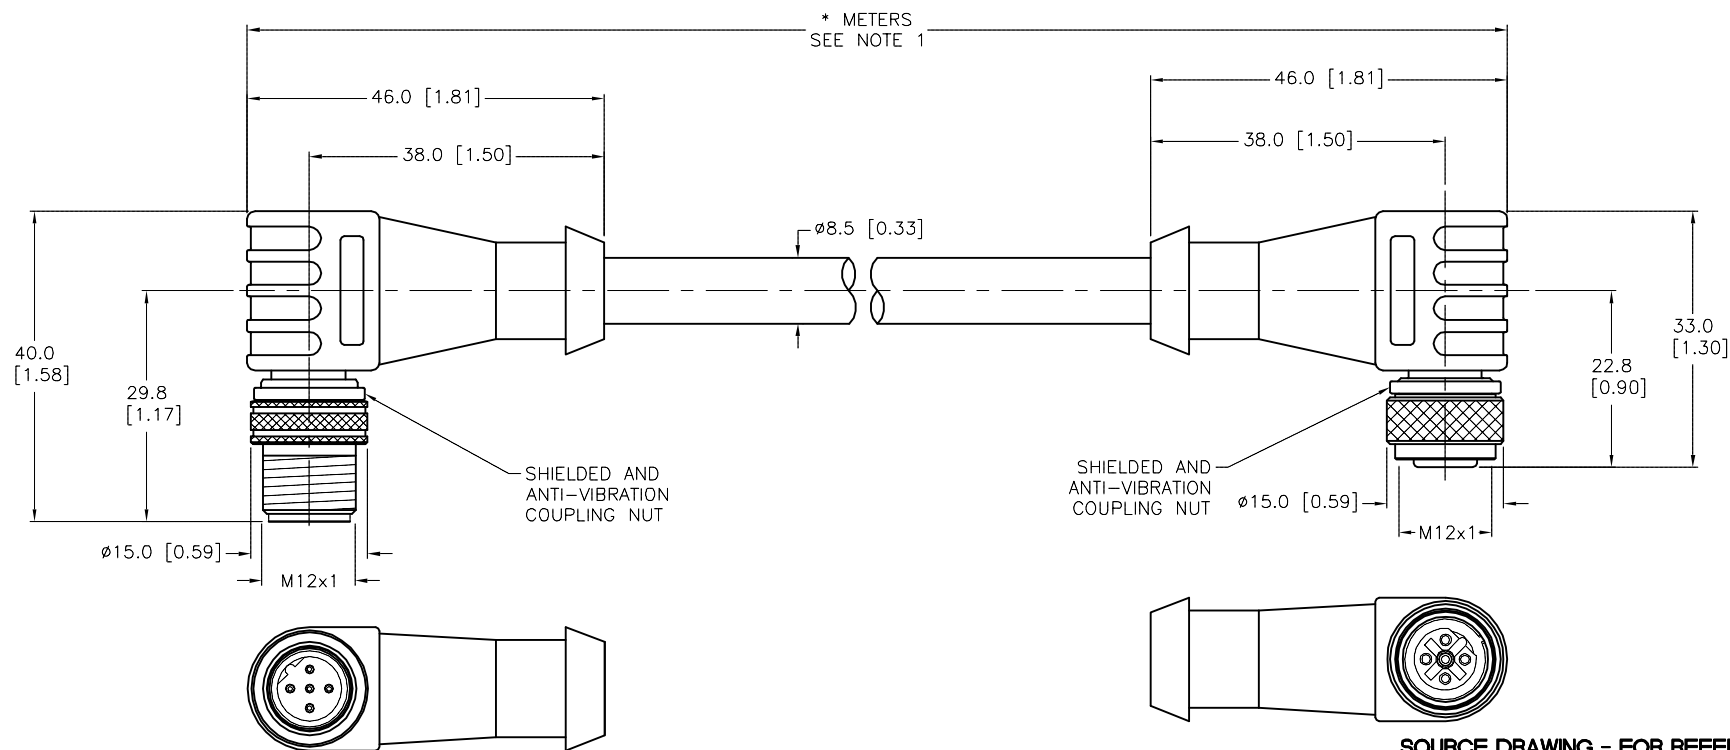

**SOURCE DRAWING - FOR REFERENCE ONLY**

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS  1.  2.  3.  4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	<b>TURCK inc</b> <i>High Technology Sensors and Automation Controls</i>		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY  CONTACT TURCK FOR MORE INFORMATION	DRFT      CBM	DATE    05/30/01	DESCRIPTION  WSSW WKSX 455-*M				
DGNN		SCALE    1=1.0						
FINISH		UNIT OF MEASUREMENT  <b>MILLIMETER [ INCH ]</b>  DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.		REV  E		
				FILE: 777005847		SHEET 1 OF		