


NI6U-EGT08-AP6X-H1341 Inductive Sensor – With Extended Switching Distance

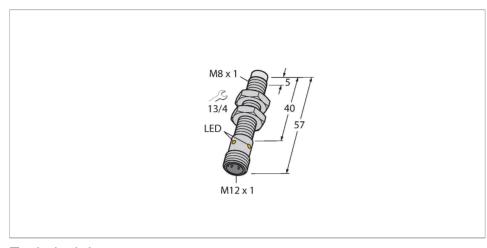


Technical data

Type	NI6U-EGT08-AP6X-H1341
ID	4635811
General data	
Rated switching distance	6 mm
Mounting conditions	Non-flush
Secured operating distance	≤ (0.81 × Sn) mm
Repeat accuracy	≤ 2 % of full scale
Temperature drift	≤ ±10 %
	≤ ± 20 %, ≤ 0 °C
Hysteresis	315 %
Electrical data	
Operating voltage U _B	1030 VDC
Ripple U _{ss}	≤ 10 % U _{Bmax}
DC rated operating current I _e	≤ 150 mA
No-load current	≤ 15 mA
Residual current	≤ 0.1 mA
Isolation test voltage	0.5 kV
Short-circuit protection	yes/Cyclic
Voltage drop at I _e	≤ 1.8 V
Wire break/reverse polarity protection	yes/Complete
Output function	3-wire, NO contact, PNP
DC field stability	200 mT
AC field stability	200 mT _{ss}
Insulation class	

Features

- ■Threaded barrel, M8 x 1
- Stainless steel, PTFE-coated
- Factor 1 for all metals
- Protection class IP68
- Resistant to magnetic fields
- Large switching distance
- High switching frequency
- ■Integrated protection against predamping
- Little metal-free spaces
- ■DC 3-wire, 10...30 VDC
- ■NO contact, PNP output
- ■M12 x 1 male connector

Wiring diagram





Functional principle

Inductive sensors are designed for wear-free and contactless detection of metal objects. uprox+ sensors have significant advantages due to their patented multi-coil system. They excel thanks to their optimum switching distances, maximum flexibility and operational reliability as well as efficient standardization.





Technical data


Switching frequency	1 kHz
Mechanical data	
Design	Threaded barrel, M8 x 1
Dimensions	57 mm
Housing material	Stainless steel, 1.4427 SO, PTFE-coated
Active area material	Plastic, PP, PTFE-coated
Max. tightening torque of housing nut	5 Nm
Electrical connection	Connector, M12 × 1
Environmental conditions	
Ambient temperature	-30+85 °C
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP68
MTTF	874 years acc. to SN 29500 (Ed. 99) 40 °C
Switching state	LED, Yellow

Mounting instructions

Mounting instructions/Description

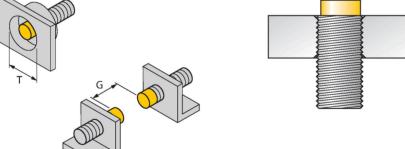





	3 x B	
Distance W	3 x Sn	_
Distance T	3 x B	erve
Distance S	1.5 x B	res(
Distance G	6 x Sn	nges
Distance N	2 x Sn	cha
Diameter active area B	Ø 8 mm	NI6U-EGT08-AP6X-H1341 02/21/2025 13-31 technical changes reserved
All non-flush mountable to barrel sensors can be so edge of the barrel. In this the sensor operates safe	rewed to the upper mounting position,	5 13-3



Accessories


BST-08B 6947210

Mounting clamp for threaded barrel sensors, with dead-stop; material: PA6


BSS-08

6901322

Mounting clamp for smooth and threaded barrel sensors; material: Polypropylene



MBS80 69479



Mounting clamp for smooth barrel sensors; mounting block material: Anodized aluminum