


SPECIFICATIONS							
CONTACT CARRIER MATERIAL	TPU						
MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY						
CONTACT MATERIAL/PLATING	BRASS/GOLD						
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED						
RATED CURRENT [A]	9.0 A						
RATED VOLTAGE [V]	300 V						
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW						
CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)						
NUMBER OF CONDUCTORS [AWG]	2x16 AWG						
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)						
PROTECTION CLASS	NEMA 1,3,4,4X,6P,12 & IECIP67,IP68,IP69,IP69K						

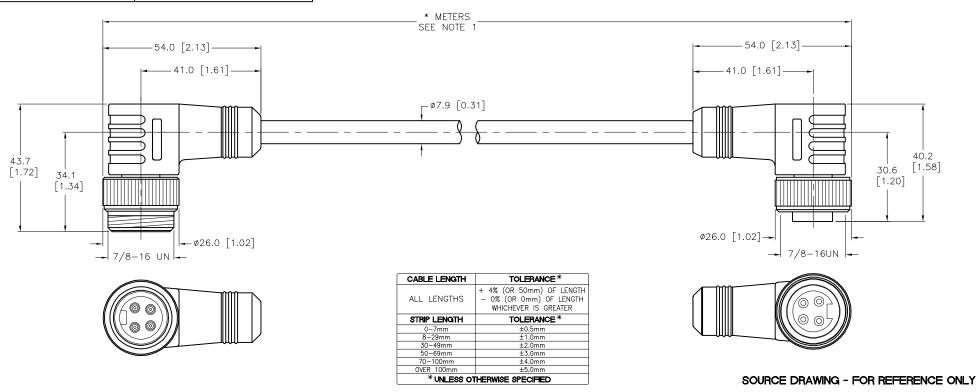

NOTES:

- 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. 2020 NEC NOW REQUIRES A DEDICATED GROUND CONDUCTOR FOR ITC-ER AND PLTC-ER CABLES WHEN INSTALLED IN HAZARDOUS LOCATIONS ALTHOUGH UL CABLE STANDARDS DO NOT REQUIRE A GROUND CONDUCTOR. THIS PRODUCT DOES NOT HAVE A DEDICATED GROUND CONDUCTOR. THEREFORE, WHEN INSTALLED IN A HAZARDOUS LOCATION THE INSTALLATION PRACTICES FOR ITC OR PLTC CABLES MUST BE FOLLOWED TO PROVIDE GROUND CONTINUITY.

G	UPDATE OD	NF	03/12/24	79889
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			CK	3000 CAMPUS MINNEAPOLIS, MN 1-800-544- (763) 553-7 (763) 553-0 www.turck.u	N 55441 7769 '300 1708 fax
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT RDS	DATE 05/07/03 SCALE 1=1.3	DESCRIPTION	WSV WKV	254-*M	
FINISH		UNIT OF ME	EASUREMENT	IDENTIFICATION N	NO.		rev G

DO NOT SCALE THIS DRAWING

FILE: 777006179

SHEET 1 OF 1