


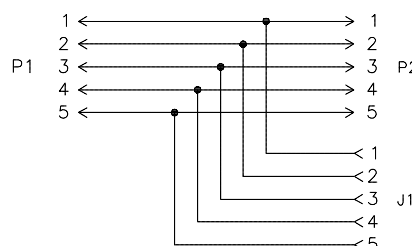



MALE END VIEW	FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS																									
 1 = BARE (SHIELD) 2 = RED (+ VOLTAGE) 3 = BLACK (- VOLTAGE) 4 = WHITE (CAN_H) 5 = BLUE (CAN_L)	 1 = BARE (SHIELD) 2 = RED (+ VOLTAGE) 3 = BLACK (- VOLTAGE) 4 = WHITE (CAN_H) 5 = BLUE (CAN_L)		<table><tr><td>CONTACT CARRIER MATERIAL</td><td>TPU/BLUE-GRAY</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/BLUE-GRAY</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>250 V</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>PVC/GRAY</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>HDPE (DATA), SRPVC (POWER)</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>4x22 AWG, 22 AWG DRAIN</td></tr><tr><td>SHIELDING</td><td>FOIL (PAIRS), FOIL (OVERALL)</td></tr><tr><td>TEMPERATURE RATING</td><td>-40°C to +80°C (-40°F to +176°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP 67</td></tr></table>	CONTACT CARRIER MATERIAL	TPU/BLUE-GRAY	MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	250 V	OUTER JACKET MATERIAL/COLOR	PVC/GRAY	CONDUCTOR INSULATION MATERIAL	HDPE (DATA), SRPVC (POWER)	NUMBER OF CONDUCTORS [AWG]	4x22 AWG, 22 AWG DRAIN	SHIELDING	FOIL (PAIRS), FOIL (OVERALL)	TEMPERATURE RATING	-40°C to +80°C (-40°F to +176°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP 67	
CONTACT CARRIER MATERIAL	TPU/BLUE-GRAY																											
MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY																											
CONTACT MATERIAL/PLATING	BRASS/GOLD																											
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																											
RATED CURRENT [A]	4.0 A																											
RATED VOLTAGE [V]	250 V																											
OUTER JACKET MATERIAL/COLOR	PVC/GRAY																											
CONDUCTOR INSULATION MATERIAL	HDPE (DATA), SRPVC (POWER)																											
NUMBER OF CONDUCTORS [AWG]	4x22 AWG, 22 AWG DRAIN																											
SHIELDING	FOIL (PAIRS), FOIL (OVERALL)																											
TEMPERATURE RATING	-40°C to +80°C (-40°F to +176°F)																											
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP 67																											
																												

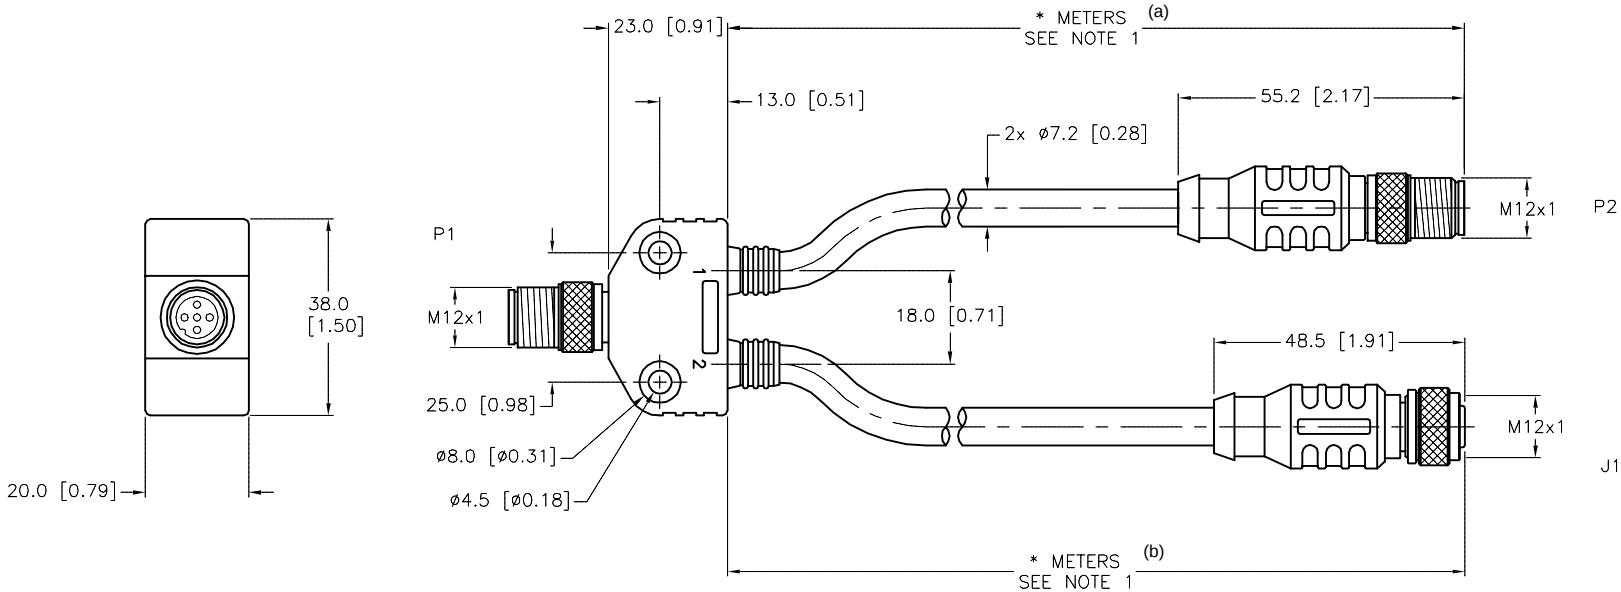

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

D	DRAWING PROCESSED AS PART OF ECO 33971	CBM	04/06/11	33971
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
							
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RDS	DATE	10/21/03	DESCRIPTION (a) (b) VB2-FSM/RSC RKC 572-*M-*M	
		APVD	L.S.	SCALE	1=1.5		
FINISH		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT			IDENTIFICATION NO.	REV D
			MILLIMETER [INCH]				
		DO NOT SCALE THIS DRAWING			FILE: 777006307	SHEET 1 OF 1	