





VALVE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS																							
 1 = BROWN 2 = BLUE 3 = N/C GND = BLACK	 1 = BROWN 2 = BLUE 3 = N/C 4 = WHITE 5 = BLACK 		<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON OR TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/TRANSLUCENT BLACK (J1), YELLOW (P1)</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/SILVER (J1), GOLD (P1)</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL (P1)</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>0-220 VAC/VDC</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>PVC/GRAY</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMER OF CONDUCTORS [AWG]</td><td>4x18 AWG</td></tr><tr><td>OPERATING TEMPERATURE</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67</td></tr></table>	CONTACT CARRIER MATERIAL	NYLON OR TPU	MOLDED HEAD MATERIAL/COLOR	TPU/TRANSLUCENT BLACK (J1), YELLOW (P1)	CONTACT MATERIAL/PLATING	BRASS/SILVER (J1), GOLD (P1)	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL (P1)	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	0-220 VAC/VDC	OUTER JACKET MATERIAL/COLOR	PVC/GRAY	CONDUCTOR INSULATION MATERIAL	PVC	NUMER OF CONDUCTORS [AWG]	4x18 AWG	OPERATING TEMPERATURE	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67	
CONTACT CARRIER MATERIAL	NYLON OR TPU																									
MOLDED HEAD MATERIAL/COLOR	TPU/TRANSLUCENT BLACK (J1), YELLOW (P1)																									
CONTACT MATERIAL/PLATING	BRASS/SILVER (J1), GOLD (P1)																									
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL (P1)																									
RATED CURRENT [A]	4.0 A																									
RATED VOLTAGE [V]	0-220 VAC/VDC																									
OUTER JACKET MATERIAL/COLOR	PVC/GRAY																									
CONDUCTOR INSULATION MATERIAL	PVC																									
NUMER OF CONDUCTORS [AWG]	4x18 AWG																									
OPERATING TEMPERATURE	-40°C to +105°C (-40°F to +221°F)																									
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67																									

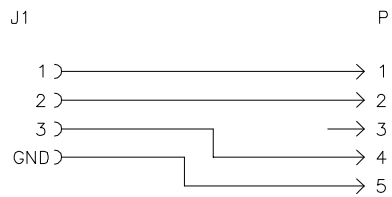

- NOTES:
- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
 - "/CS10530" DESIGNATES SPECIAL WIRING.

SOURCE DRAWING - FOR REFERENCE ONLY

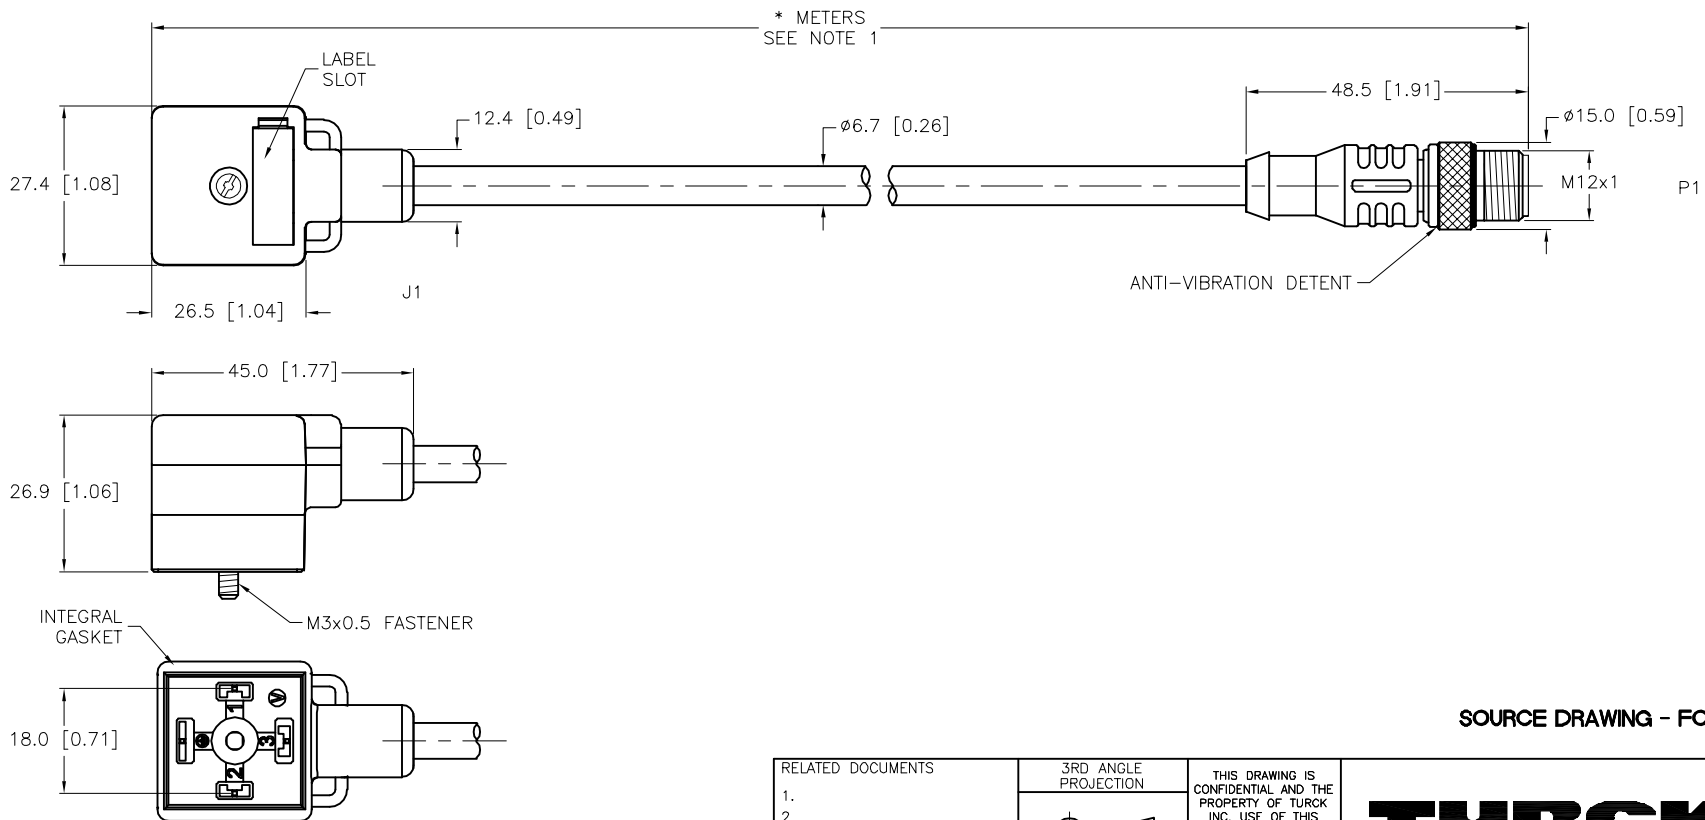

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/CS10530" DESIGNATES SPECIAL WIRING.

E	UPDATE VALVE MOLD DESIGN	RDS	02/19/13	41241
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS	1.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us						
	2.									
3.										
4.										
MATERIAL	SEE SPECIFICATIONS		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT	JB	DATE	08/23/02	DESCRIPTION	VAS 3-A580-*M-RSC 5.42T/CS10530	
SEE SPECIFICATIONS		APVD			SCALE	1=1.3				
FINISH	SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT			IDENTIFICATION NO.			REV
SEE SPECIFICATIONS				MILLIMETER [INCH]						E
				DO NOT SCALE THIS DRAWING			FILE: 777006656			SHEET 1 OF 1