




FEMALE END VIEW	TYPICAL PANEL CUTOUT		<table><tr><th colspan="2">SPECIFICATIONS</th></tr><tr><td>CONTACT CARRIER MATERIAL</td><td>TPU OR NYLON</td></tr><tr><td>HOUSING MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>250 V</td></tr><tr><td>CABLE JACKET/COLOR</td><td>PVC/YELLOW</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC/NYLON (NYLON OVERCOAT)</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>2x16 AWG</td></tr><tr><td>TEMPERATURE RATING</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP68</td></tr><tr><td>MAX. PANEL THICKNESS</td><td>3.0 [0.12]</td></tr></table>	SPECIFICATIONS		CONTACT CARRIER MATERIAL	TPU OR NYLON	HOUSING MATERIAL/PLATING	BRASS/NICKEL	CONTACT MATERIAL/PLATING	BRASS/GOLD	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	250 V	CABLE JACKET/COLOR	PVC/YELLOW	CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)	NUMBER OF CONDUCTORS [AWG]	2x16 AWG	TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68	MAX. PANEL THICKNESS	3.0 [0.12]
SPECIFICATIONS																											
CONTACT CARRIER MATERIAL	TPU OR NYLON																										
HOUSING MATERIAL/PLATING	BRASS/NICKEL																										
CONTACT MATERIAL/PLATING	BRASS/GOLD																										
RATED CURRENT [A]	4.0 A																										
RATED VOLTAGE [V]	250 V																										
CABLE JACKET/COLOR	PVC/YELLOW																										
CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)																										
NUMBER OF CONDUCTORS [AWG]	2x16 AWG																										
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)																										
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68																										
MAX. PANEL THICKNESS	3.0 [0.12]																										
 1 = BROWN (+ VOLTAGE) 2 = N/C 3 = BLUE (- VOLTAGE) 4 = N/C 																											

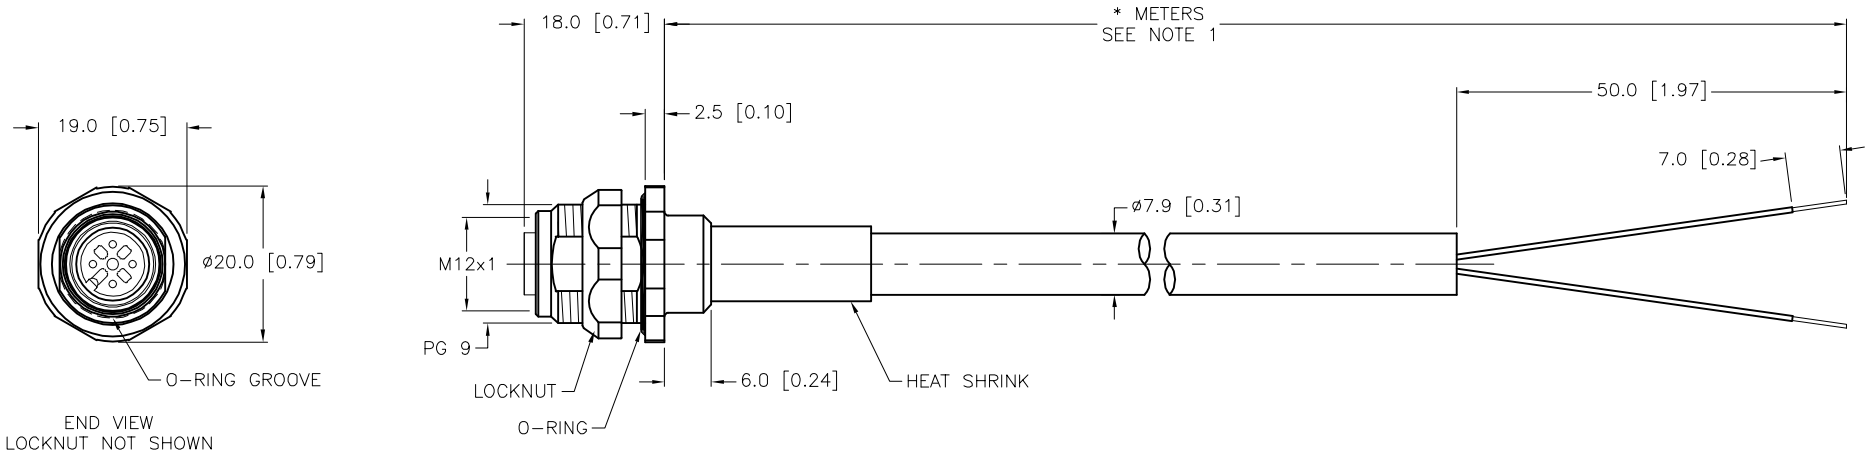

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.					<table><tr><td colspan="2"> 8-29mm±1.0mm 30-49mm±2.0mm 50-69mm±3.0mm 70-100mm±4.0mm OVER 100mm±5.0mm * UNLESS OTHERWISE SPECIFIED </td></tr></table>					8-29mm±1.0mm 30-49mm±2.0mm 50-69mm±3.0mm 70-100mm±4.0mm OVER 100mm±5.0mm * UNLESS OTHERWISE SPECIFIED		RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.  3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us						
8-29mm±1.0mm 30-49mm±2.0mm 50-69mm±3.0mm 70-100mm±4.0mm OVER 100mm±5.0mm * UNLESS OTHERWISE SPECIFIED																						
<table><tr><td>G</td><td>REMOVE OVERMOLD</td><td>KB</td><td>12/03/24</td><td>500000010753</td></tr><tr><td>REV</td><td>DESCRIPTION</td><td>BY</td><td>DATE</td><td>ECO NO.</td></tr></table>					G	REMOVE OVERMOLD	KB	12/03/24	500000010753	REV	DESCRIPTION	BY	DATE	ECO NO.	MATERIAL FINISH		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION		DRFT RDS DATE 10/06/04		DESCRIPTION FKFD 254-*M	
					G	REMOVE OVERMOLD	KB	12/03/24	500000010753													
REV	DESCRIPTION	BY	DATE	ECO NO.																		
APVD SCALE 1=1.0																						
							UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING		IDENTIFICATION NO. REV G													
									FILE: 777006684 SHEET 1 OF 1													