




FEMALE END VIEW		USB END VIEW	SPECIFICATIONS	
				
1 = GREEN (USBD0+) 2 = RED (USBVCC0) 3 = BLACK (USBGND) 4 = N/C 5 = N/C 6 = N/C 7 = WHITE (USBD0-) 8 = N/C		1 = RED (USBVCC0) 2 = WHITE (USBD0-) 3 = GREEN (USBD0+) 4 = BLACK (USBGND)		
				
			CONTACT CARRIER MATERIAL (J1)	TPU
			MOLDED MATERIAL/COLOR (J1)	TPU/BLACK
			CONTACT MATERIAL/PLATING (J1)	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING (J1)	BRASS/NICKEL
			RATED CURRENT [A]	1.0 A
			RATED VOLTAGE [V]	30 V
			OUTER CABLE JACKET MATERIAL/COLOR	PVC/BEIGE
			CONDUCTOR INSULATION MATERIAL	PE (DATA), PVC (POWER)
			NUMBER OF CONDUCTORS [AWG]	2x28 AWG (DATA), 2x24 AWG (POWER)
			SHIELDING	TINNED-COPPER BRAIDED
			TEMPERATURE RANGE	-30°C to +75°C (-22°F to +167°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

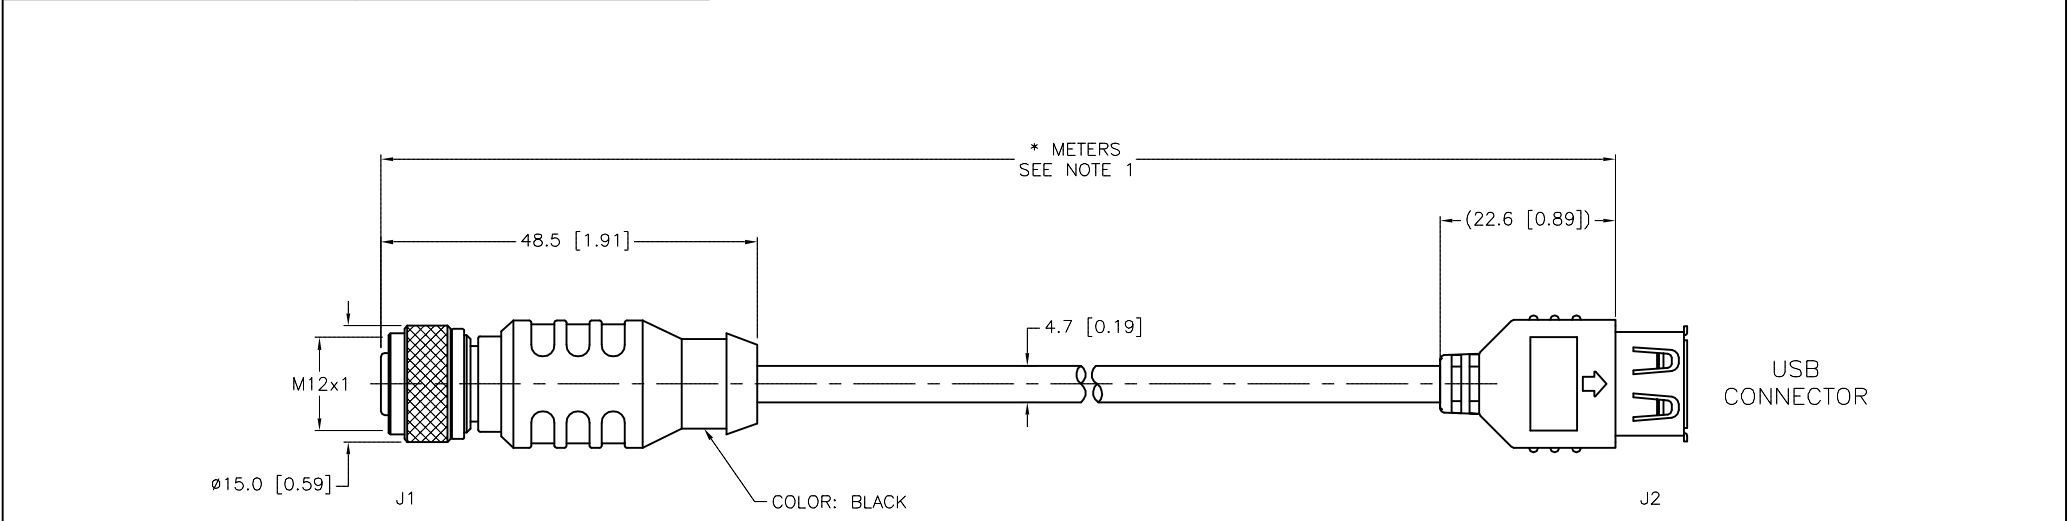


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

B	DRAWING PROCESSED AS PART OF ECO 33971	CBM	04/06/11	33971
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
						
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RDS	DATE 05/06/05	DESCRIPTION RKC USB/AF 84X-*M	
		APVD		SCALE 1=1.0		
FINISH		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT			IDENTIFICATION NO.
			MILLIMETER [INCH]			
		DO NOT SCALE THIS DRAWING			REV B	
		FILE: 777006948			SHEET 1 OF 1	