


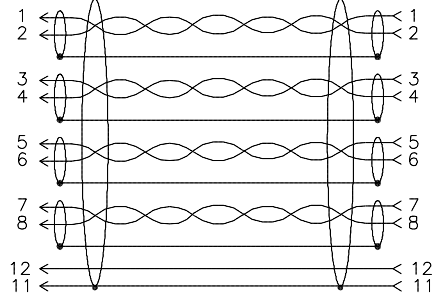



MALE END VIEW		FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 1 = WHT/BLK 2 = BLK/WHT 3 = WHT/GRN 4 = GRN/WHT 5 = WHT/RED 6 = RED/WHT 7 = WHT/ORG 8 = ORG/WHT 9 = N/C 10 = N/C 11 = DRAIN 12 = GRN/YEL		 1 = WHT/BLK 2 = BLK/WHT 3 = WHT/GRN 4 = GRN/WHT 5 = WHT/RED 6 = RED/WHT 7 = WHT/ORG 8 = ORG/WHT 9 = N/C 10 = N/C 11 = DRAIN 12 = GRN/YEL		CONTACT CARRIER MATERIAL NYLON or PBT MOLDED HEAD MATERIAL/COLOR TPU/BLACK CONTACT MATERIAL/PLATING BRASS/GOLD COUPLING NUT MATERIAL/PLATING BRASS/NICKEL RATED CURRENT [A] 3.0 A RATED VOLTAGE [V] 300 v OUTER JACKET MATERIAL/COLOR PVC/BLUE CONDUCTOR INSULATION MATERIAL PVC NUMBER OF CONDUCTORS [AWG] 8x22 AWG, 1x18 AWG GROUND DRAIN/SHIELD 4X24, 1X22 AWG/ALUMINUM FOIL SHIELDED TEMPERATURE RATING −40°C to +105°C (−40°F to +221°F) PROTECTION CLASS MEETS IEC IP67 CONDUCTOR ARRANGEMENT 4 SHIELDED TWISTED PAIR W/DRAIN, 1 GND, 1 DRAIN CABLE RATINGS UL: ITC/PLTC/AWM, 105C, 300 V CSA: CMX−OUTDOOR−CMG/AWM, 105C, 300 V	

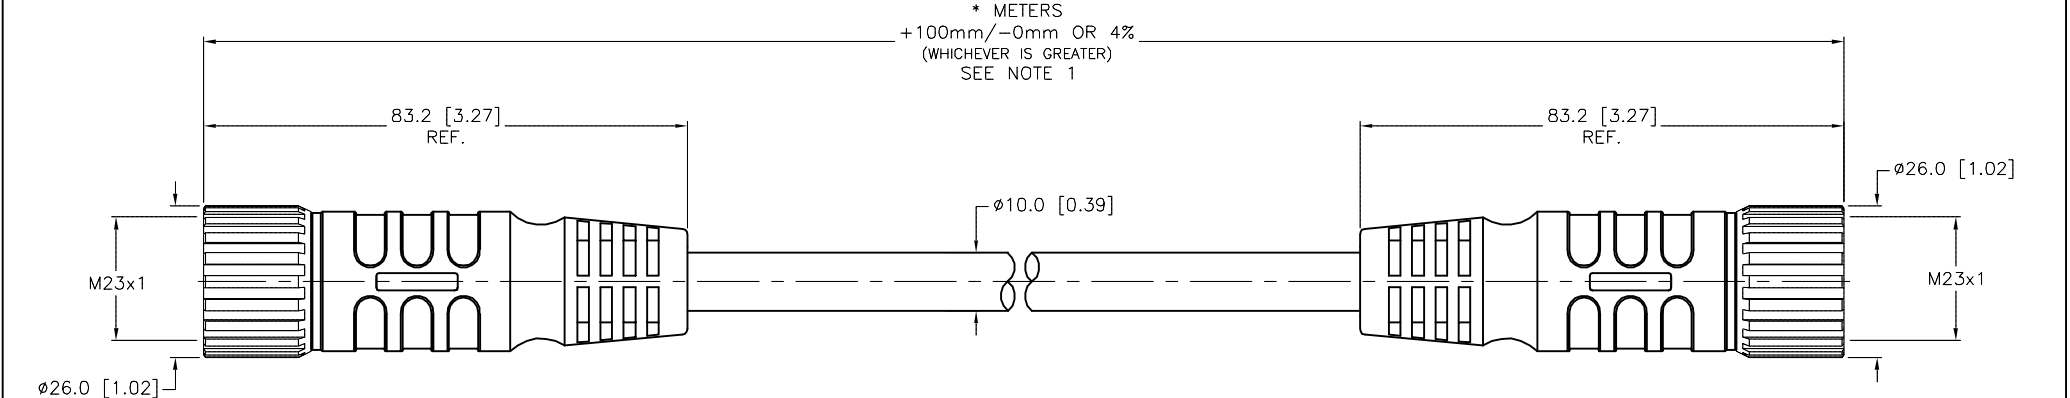

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

F	UPDATED DRAIN SPECS PER ECO	TV	03/02/16	53780
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 2. 3. 4.				DRFT RDS		DATE 02/21/05		DESCRIPTION	
MATERIAL		SEE SPECIFICATIONS		APVD		SCALE 1=1.3		P-CSM CKM 12-978-*	
FINISH		SEE SPECIFICATIONS		UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV	
		CONTACT TURCK FOR MORE INFORMATION		MILLIMETER [INCH]		FILE: 777007033		SHEET 1 OF 1	
				DO NOT SCALE THIS DRAWING					