


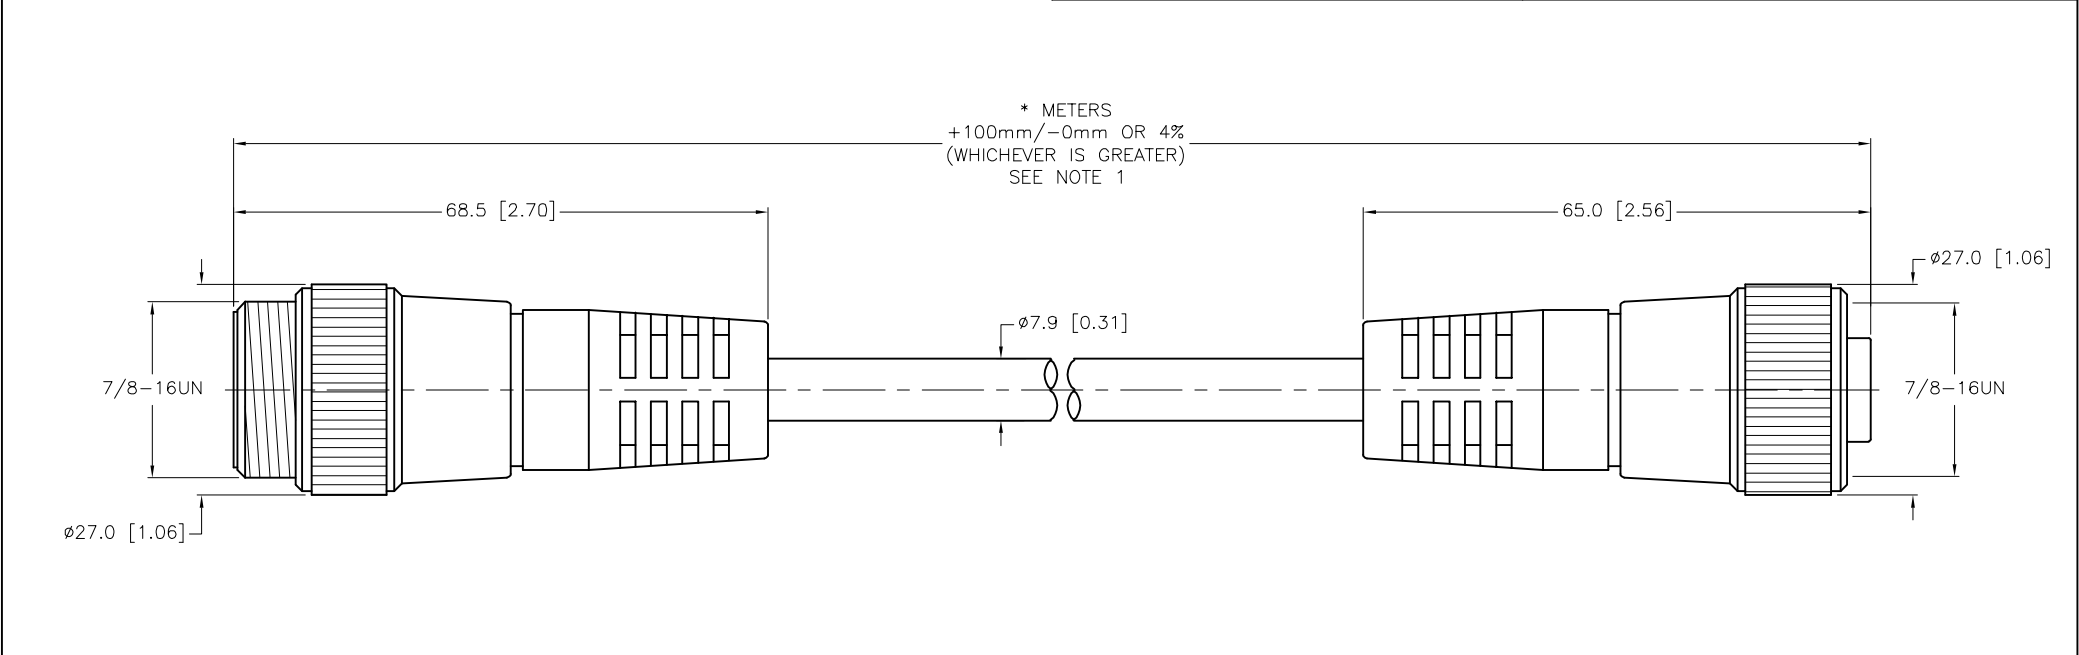


SPECIFICATIONS	
CONTACT CARRIER MATERIAL	TPU
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	STAINLESS STEEL/PASSIVATED
RATED CURRENT [A]	9.0 A
RATED VOLTAGE [V]	300 V
OUTER JACKET MATERIAL/COLOR	PVC/PLUM
CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)
CONDUCTORS	3x18 AWG
DRAIN/SHIELD	20 AWG/ALUM.-POLYESTER FOIL (PAIR)
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	NEMA 1,3,4,4X,6P,12 & IECIP67,IP68,IP69,IP69K
CONDUCTOR ARRANGEMENT	1 SHIELDED TWISTED PAIR, 1 GROUND, 1 DRAIN
CABLE RATINGS	UL: ITC-ER/PLTCER-ER, DIRECT BURIAL 105°C CSA: CIC 90°C 600V C(UL): 245/1309 MARINE SHIPBOARD & IEEE 1580

MALE END VIEW	FEMALE END VIEW
 1 = BLUE 2 = BROWN 3 = DRAIN 4 = GREEN/YELLOW 	 1 = BLUE 2 = BROWN 3 = DRAIN 4 = GREEN/YELLOW 



SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us					
					1. 2. 3. 4.				TURCK							
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY				DRFT RWC		DATE 03/15/05		DESCRIPTION P-RSV RKV 40-162-*M	
					SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION				APVD		SCALE 1=1.0			
					FINISH						UNIT OF MEASUREMENT MILLIMETER [INCH]					
SEE SPECIFICATIONS				DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.		REV H								
H	UPDATE CABLE OD			NF	04/29/24	80127			FILE: 777007065		SHEET 1 OF 1					
REV	DESCRIPTION			BY	DATE	ECO NO.										