




FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS																							
 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK	 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK	<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON OR TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/YELLOW</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>250 V</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>PVC/GRAY</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>4x22 AWG</td></tr><tr><td>TEMPERATURE RATING</td><td>-40°C to +105°C (-40°F to ±221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67</td></tr></table>	CONTACT CARRIER MATERIAL	NYLON OR TPU	MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT/PLATING	BRASS/NICKEL	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	250 V	OUTER JACKET MATERIAL/COLOR	PVC/GRAY	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	4x22 AWG	TEMPERATURE RATING	-40°C to +105°C (-40°F to ±221°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67	
CONTACT CARRIER MATERIAL	NYLON OR TPU																								
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW																								
CONTACT MATERIAL/PLATING	BRASS/GOLD																								
COUPLING NUT/PLATING	BRASS/NICKEL																								
RATED CURRENT [A]	4.0 A																								
RATED VOLTAGE [V]	250 V																								
OUTER JACKET MATERIAL/COLOR	PVC/GRAY																								
CONDUCTOR INSULATION MATERIAL	PVC																								
NUMBER OF CONDUCTORS [AWG]	4x22 AWG																								
TEMPERATURE RATING	-40°C to +105°C (-40°F to ±221°F)																								
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67																								
																									

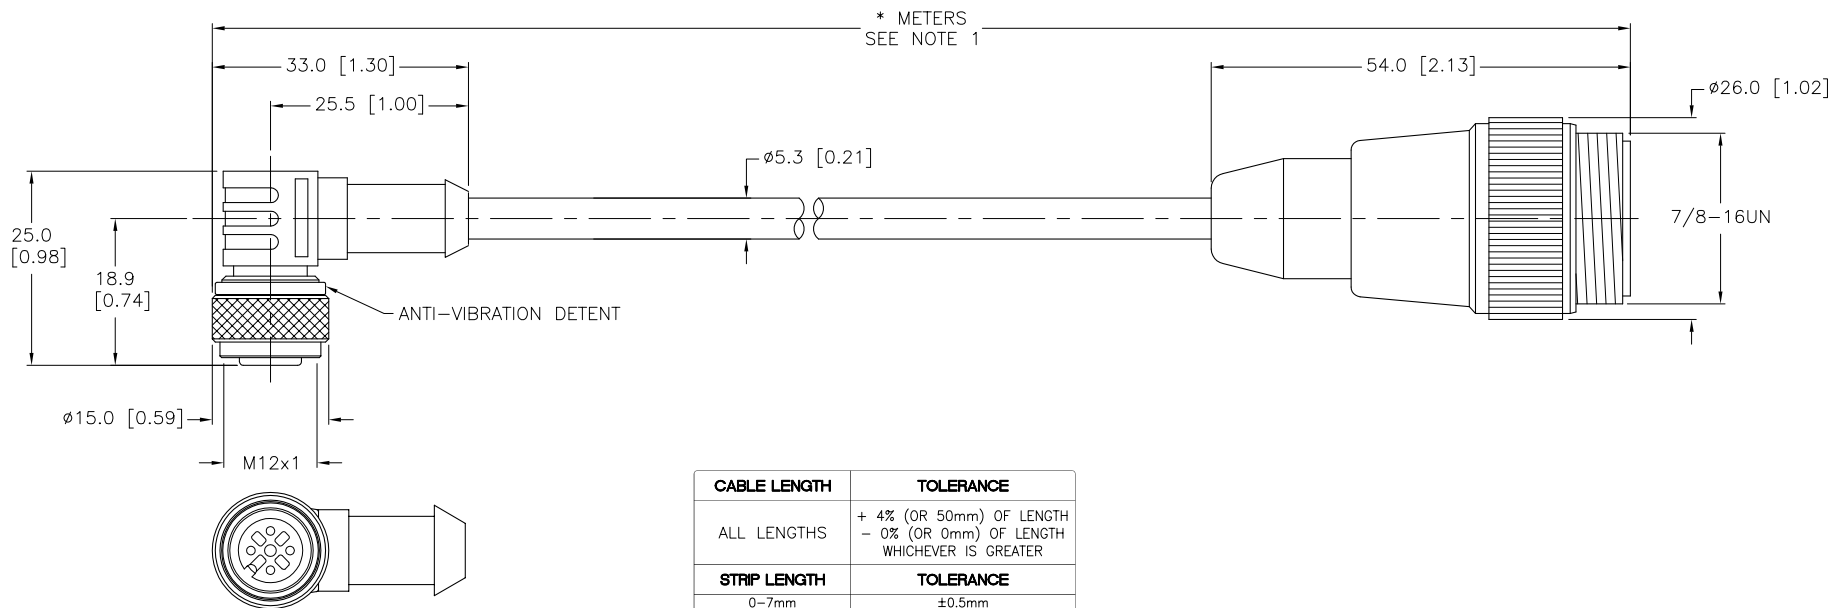


CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK inc High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com			
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RWC	DATE	07/01/05	DESCRIPTION WK 4.4T-*--RSM 40			
SEE SPECIFICATIONS		APVD		SCALE	1=1.0				
FINISH		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT			IDENTIFICATION NO.		REV E	
SEE SPECIFICATIONS			MILLIMETER [INCH]						
		DO NOT SCALE THIS DRAWING			FILE: 777007193		SHEET 1 OF 1		

E	UPDATE CABLE DIAMETER	KMY	12/30/11	37143
REV	DESCRIPTION	BY	DATE	ECO NO.