


BL compact™ fieldbus station for PROFIBUS-DP Interface for Connection of 2 BL ident Read/Write Heads (HF/ UHF) and 8 Digital PNP Inputs BLCDP-6M12LT-2RFID-S-8DI-PD

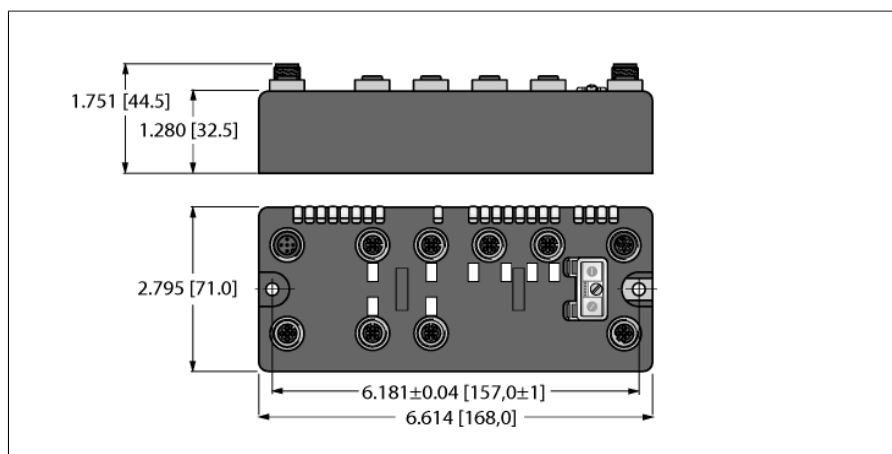


Type	BLCDP-6M12LT-2RFID-S-8DI-PD
ID	6811178
Nominal system voltage	24 VDC
System power supply	Via auxiliary power
Voltage supply connection	2 x M12, 5-pin
Admissible range V_i	18...30 VDC
Nominal current I_i	225 mA
Max. current I_i	2 A
Admissible range V_o	18...30 VDC
Max. current V_o	4 A
Fieldbus transmission rate	9.6 kbps ... 12 Mbps
Adjustment transmission rate	Automatic detection
Fieldbus address range	0...99
Fieldbus addressing	2 decimally coded rotary switches
Fieldbus connection technology	2 x M12
	5-pole, reverse keyed
Fieldbus termination	external
Service interface	RS232 interface
Input type	PNP
Type of input diagnostics	Channel diagnostics
Sensor supply (V_{SENSE})	24 VDC, 100 mA short-circuit limiting
Low-level signal voltage	4.5 V
Low-level signal voltage	< 4.5 VDC
High-level signal voltage	7...30 VDC
Low-level signal current	< 1.5 mA
High-level signal current	2.1...3.7 mA
Input delay	0.25 or 2.5 ms (configurable)

- On-machine Compact fieldbus I/O block
- PROFIBUS-DP slave
- 9.6 kbps ... 12 Mbps
- Two 5-pole M12, reverse-keyed, connectors for fieldbus connection
- 2 rotary switches for node address
- IP67, IP69K
- M12 I/O connectors
- LEDs indicating status and diagnostics
- Electronics galvanically separated from the field level via optocouplers
- 8 digital PNP inputs, 24 VDC
- Channel diagnostics
- Wire-break monitoring
- Selection of filtering times (Input delay)
- Invertible inputs
- Simple RFID interface
- Connection of 2 BL ident® read/write heads
- Max cable length of 50 m


Technology	
Signal type	Simple RFID interface
Number of channels	2
Sensor supply	0.5 A per channel, short-circuit proof
Simultaneity factor	1
Transmission rate	115.2 kbps
Cable length	50 m
Electrical isolation	isolation of electronics and field level via optocouplers
Dimensions	168 x 71 x 32.5 mm
Mounting	2 × 5.4 mm diameter holes, 1.7 Nm torque
Weight	600 ± 20 g
Housing material	Glass-filled nylon, nickel plated brass connectors
Housing color	Black
Material screw	Nickel-plated brass
Material label	Polyester with polycarbonate overlay
Ground label material	Nickel plated brass
Protection class	IP67 IP69K
Ambient temperature	-40...+70 °C
Storage temperature	-40...+85 °C
Relative humidity	15 to 95% (non-condensing)
Vibration test	Acc. to IEC 61131-2
- up to 20 g (at 10 up to 150 Hz)	For mounting on base plate or machinery
Shock test	according to IEC 61131-2
Electromagnetic compatibility	Acc. to IEC 61131-2
Approvals and certificates	CE, cULus

Pinning and wiring diagram

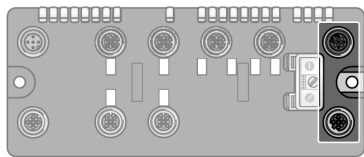


PROFIBUS-DP
Fieldbus cable (example): RSSW RKSW 455-2M ident-no. U0350
or RSSW-RKSW455-2M ident-no. 6602222

Pin Assignment (M12, B-Code)


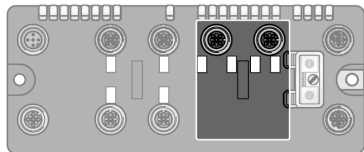


Slot 1: RFID Channels
Extension cable (example): RK 4.5T-2-RS 4.5T/S2501 ident-no. U3-01243 or RK4.5T-2-RS4.5T/S2500 ident-no. 6699200

Connector .../S2500




Connector .../S2501

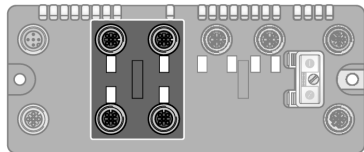


Slot 2: Digital Inputs
Extension cable (example): RK 4.4T-2-RS 4.4T ident-no. U2445 or RKC4.4T-2-RSC4.4T/TEL ident-no. 6625208


Pin Assignment




Wiring Diagram for Dual Input Sensor




Wiring Diagram for 2 Sensors



Wiring Diagram for Wire-Break Monitoring




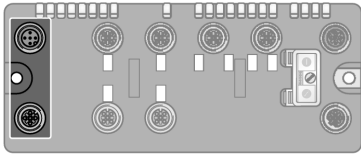

Auxiliary Power

Extension cable (example): RKC 4.4T-2-RSC 4.4T ident-no. U5264 or RKC4.4T-2-RSC4.4T/TEL ident-no. 6625208

Pin Assignment



Station LED status

LED	Color	Status	Description
IOs		OFF	No power
	RED	ON	Low power or station error
	RED	FLASHING (1 Hz)	I/O module configuration error
	RED	FLASHING (4 Hz)	No I/O module bus communication
	GREEN	ON	Station ok
	GREEN	FLASHING	Force mode active
BUS		OFF	No field bus communication
	GREEN	ON	Field bus communication active
	GREEN	FLASHING (1 Hz)	No field bus communication active, device status OK
	RED	ON	Bus error at the gateway; no data exchange
	RED	FLASHING	Faulty PROFIBUS-DP address
BUS		OFF	No field bus communication
	GREEN	ON	Field bus communication active
	GREEN	FLASHING (1 Hz)	No field bus communication active, device status OK
	RED	ON	Bus error at the gateway; no data exchange
	RED	FLASHING	Faulty PROFIBUS-DP address

I/O LED status slot 1

LED	Color	Status	Description
D1 *		OFF	No diagnostics active
	RED	ON	Station error/ module bus communication failure
	RED	FLASHING (0.5Hz)	Diagnostics active (Slot 1)
RW0 / RW1		OFF	No tag present, no diagnostics active
	GREEN	ON	Tag present
	GREEN	FLASHING (2 Hz)	Data communication from / to tag active
	RED	ON	Error in the R/W head
	RED	FLASHING (2 Hz)	Short circuit in the transceiver supply

* D1 LED also indicates gateway diagnostics

I/O LED status slot 2

LED	Color	Status	Description
D2 *		OFF	No diagnostics active
	RED	ON	Station error/ module bus communication failure
	RED	FLASHING (0.5Hz)	Diagnostics active (Slot 2)
DI channels 0...7		OFF	Input status x= "0" (OFF), no diagnostics active
	GREEN	ON	Input status x = "1" (ON)
	RED	ON	Wire-break monitoring active (LED 0 to 3)
	RED	FLASHING (2 Hz)	Overload sensor supply

* D2 LED also indicates gateway diagnostics

I/O Data Map

INPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
RFID 1 ₀	0	Done	Busy	Error	Trans. Conn.	Trans. On	TP	TFR	-
	1	Error Cat. (Category Code)							
	2	Error Desc. (Description Code)							
	3	-	-	-	-	-	-	-	-
	4...11	Read Data (8 Byte)							
RFID 1 ₁	12	Done	Busy	Error	Trans. Conn.	Trans. On	TP	TFR	-
	13	Error Cat. (Category Code)							
	14	Error Desc. (Description Code)							
	15	-	-	-	-	-	-	-	-
	16...23	Read Data (8 Byte)							
	24	DI 2 ₇	DI 2 ₆	DI 2 ₅	DI 2 ₄	DI 2 ₃	DI 2 ₂	DI 2 ₁	DI 2 ₀
	25	-	-	-	-	-	-	-	-
OUTPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
RFID 1 ₀	0	Transceiver	Next	Tag ID	Read	Write	Tag Info.	Trans. Info.	Reset
	1	-	-	-	-	-	Byte Count 2	Byte Count 1	Byte Count 0
	2	Address High Byte (MSB)							
	3	Address Low Byte (LSB)							
	4...11	Write Data (8 Byte)							
RFID 1 ₁	12	Transceiver	Next	Tag ID	Read	Write	Tag Info.	Trans. Info.	Reset
	13	-	-	-	-	-	Byte Count 2	Byte Count 1	Byte Count 0
	14	Address High Byte (MSB)							
	15	Address Low Byte (LSB)							
	16...23	Write Data (8 Byte)							