



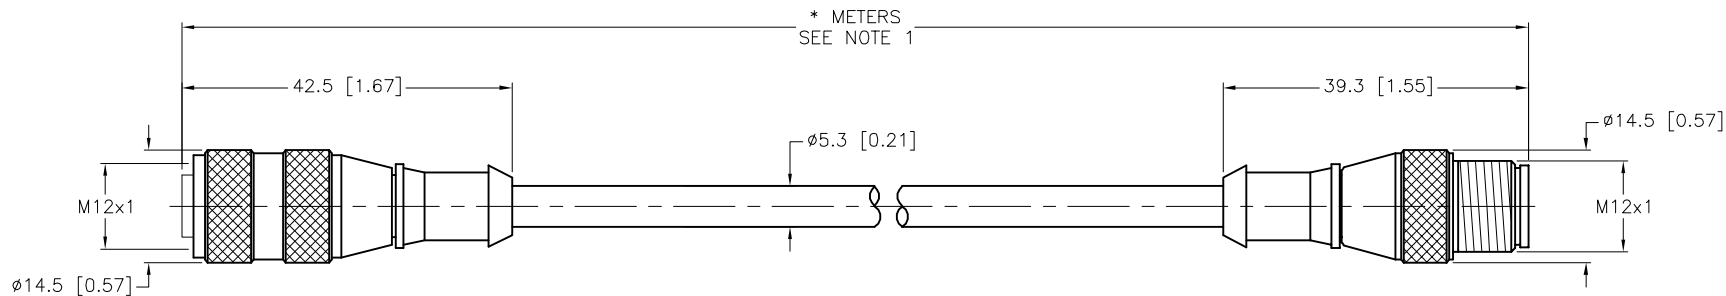


FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
		CONTACT CARRIER MATERIAL	NYLON OR TPU
1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK	1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK	MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
		RATED CURRENT [A]	4.0 A
		RATED VOLTAGE [V]	250 V
		OUTER CABLE JACKET MATERIAL/COLOR	PVC/GRAY
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	4x22 AWG
		DRAIN/SHIELD	24 AWG/ALUM.-POLYESTER FOIL SHIELD
		TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
		PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K






CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S618" DESIGNATES ALUMINIZED POLYESTER FOIL AND DRAIN WIRE. DRAIN IS NOT CONNECTED.

SOURCE DRAWING - FOR REFERENCE ONLY

<div>NOTES:</div> <div>1. "＊" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.</div> <div>2. "/S618" DESIGNATES ALUMINIZED POLYESTER FOIL AND DRAIN WIRE. <u>DRAIN IS NOT CONNECTED.</u></div>					<table><tr><td>30-49mm</td><td>±2.0mm</td></tr><tr><td>50-59mm</td><td>±3.0mm</td></tr><tr><td>70-100mm</td><td>±4.0mm</td></tr><tr><td>OVER 100mm</td><td>±5.0mm</td></tr><tr><td colspan="2">＊UNLESS OTHERWISE SPECIFIED</td></tr></table>		30-49mm	±2.0mm	50-59mm	±3.0mm	70-100mm	±4.0mm	OVER 100mm	±5.0mm	＊UNLESS OTHERWISE SPECIFIED														
30-49mm	±2.0mm																												
50-59mm	±3.0mm																												
70-100mm	±4.0mm																												
OVER 100mm	±5.0mm																												
＊UNLESS OTHERWISE SPECIFIED																													
<table><tr><td>F</td><td>UPDATE CABLE DIAMETER</td><td>KMY</td><td>01/20/12</td><td>37153</td></tr><tr><td>REV</td><td>DESCRIPTION</td><td>BY</td><td>DATE</td><td>ECO NO.</td></tr></table>					F	UPDATE CABLE DIAMETER	KMY	01/20/12	37153	REV	DESCRIPTION	BY	DATE	ECO NO.	<table><tr><td>RELATED DOCUMENTS</td><td>3RD ANGLE PROJECTION</td></tr><tr><td>1.</td><td rowspan="4"></td></tr><tr><td>2.</td></tr><tr><td>3.</td></tr><tr><td>4.</td></tr><tr><td>MATERIAL</td><td rowspan="2">ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</td></tr><tr><td>SEE SPECIFICATIONS</td></tr><tr><td>FINISH</td><td rowspan="2">CONTACT TURCK FOR MORE INFORMATION</td></tr><tr><td>SEE SPECIFICATIONS</td></tr></table>		RELATED DOCUMENTS	3RD ANGLE PROJECTION	1.		2.	3.	4.	MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	SEE SPECIFICATIONS	FINISH	CONTACT TURCK FOR MORE INFORMATION	SEE SPECIFICATIONS
F	UPDATE CABLE DIAMETER	KMY	01/20/12	37153																									
REV	DESCRIPTION	BY	DATE	ECO NO.																									
RELATED DOCUMENTS	3RD ANGLE PROJECTION																												
1.																													
2.																													
3.																													
4.																													
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY																												
SEE SPECIFICATIONS																													
FINISH	CONTACT TURCK FOR MORE INFORMATION																												
SEE SPECIFICATIONS																													

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us				
DRFT	RDS	DATE	10/24/05	DESCRIPTION RK 4.4T-＊-RS 4.4T/S618		
APVD		SCALE	1=1.0			
UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.		REV F
DO NOT SCALE THIS DRAWING				FILE: 777007711		SHEET 1 OF 1