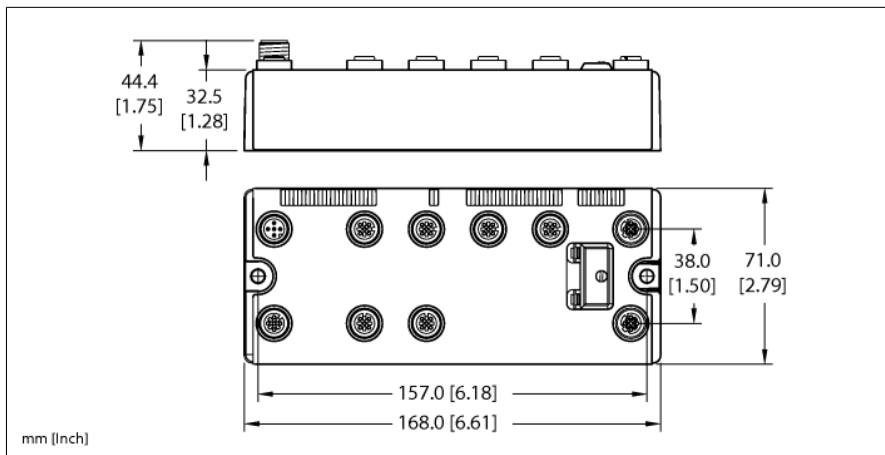


BL compact™ multiprotocol fieldbus station for Industrial Ethernet

4 IO-Link Channels and Interface for Connection of 2 ident Read/Write Heads (HF/UHF) BLCEN-6M12LT-4IOL-2RFID-S



ID	6811501
Nominal system voltage	24 VDC
System power supply	Via auxiliary power
Voltage supply connection	2 x M12, 5-pin
Admissible range Vi	20...30 VDC
Nominal current Vi	190 mA
Max. current Vi	2 A
Admissible range Vo	20...30 VDC
Nominal current Vo	80 mA
Max. current Vo	4 A
Fieldbus transmission rate	10/100 Mbps
Adjustment transmission rate	Automatic detection
Fieldbus address range	1...92 0 (192.168.1.254) 93 (BOOTP) 94 (DHCP) 95 (PGM) 96 (PGM-DHCP) *recommended for PROFINET 97...98 (manufacturer specific)
Fieldbus addressing	2 decimally coded rotary switches
Fieldbus connection technology	2 x M12 4-pole, D-coded
Protocol detection	automatic
Web server	Integrated
Service interface	Ethernet
Vendor ID	48
Product type	12
Product code	11501

- On-machine Compact fieldbus I/O block
- EtherNet/IP™, Modbus® TCP, or PROFINET slave
- Integrated Ethernet Switch
- 10 Mbps / 100 Mbps supported
- Two 4-pole M12, D-coded, connectors for fieldbus connection
- 2 rotary switches for node address
- IP67, IP69K
- M12 I/O connectors
- LEDs indicating status and diagnostics
- Electronics galvanically separated from the field level via optocouplers
- Simple RFID interface
- Connection of 2 BL ident® read/write heads
- Max cable length of 50 m

Modbus TCP	
Addressing	Static IP, BOOTP, DHCP
Supported function codes	FC1, FC2, FC3, FC4, FC5, FC6, FC15, FC16, FC23
Number of TCP connections	6
Input Data Size	max. 21 register
Input register start address	0 (0x0000 hex)
Output Data Size	max. 19 register
Output register start address	2048 (0x0800 hex)

Ethernet/IP	
Addressing	acc. to EtherNet/IP specification
Device Level Ring (DLR)	supported
Class 1 connections (CIP)	6
Input Assembly Instance	103
Input Data Size	27 INT
Output Assembly Instance	104
Output Data Size	20 INT
Configuration Assembly Instance	106
Configuration Size	0
Comm Format	Data - INT

PROFINET	
Addressing	DCP
Conformance class	B (RT)
MinCycleTime	1 ms
Diagnostics	acc. to PROFINET alarm handling
Topology detection	supported
Automatic addressing	supported
Media Redundancy Protocol (MRP)	supported
Input Data Size	max. 40 BYTE
Output Data Size	max. 40 BYTE

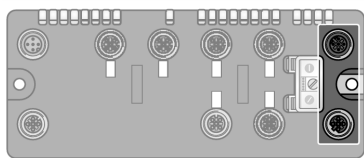
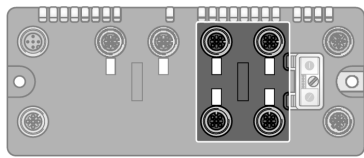

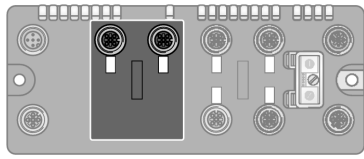


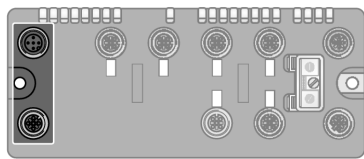


Digital inputs	
Input type	PNP
Low-level signal voltage	< 5 V
High level signal voltage	> 11 V
Low level signal current	< 1.5 mA DI / < 5mA SIO
High level signal current	2.1 ... 3.7 mA DI / 5 ... 11 mA SIO

Digital outputs	
Output type	PNP
Sensor supply (V_{SENS})	24 VDC
Output current per channel	0.5 A
Output voltage	24 VDC
Output delay	3 ms
Load type	resistive, inductive, lamp load
Load resistance, resistive	> 48 Ω
Load resistance, inductive	< 1.2 H
Lamp load	< 3 W
Switching frequency, resistive	< 200 Hz
Switching frequency, inductive	< 2 Hz
Switching frequency, lamp load	< 20 Hz
Short-circuit protection	yes

Technology	
Signal type	IO-Link
Electrical isolation	isolation of electronics and field level via optocouplers

technology	from 2RFID-S
Signal type	Simple RFID interface
Number of channels	2
Sensor supply	0.5 A per channel, short-circuit proof
Simultaneity factor	1
Transmission rate	115.2 kbps
Cable length	50 m
Electrical isolation	isolation of electronics and field level via optocouplers
Dimensions	168 x 71 x 32.5 mm
Mounting	2 × 5.4 mm diameter holes, 1.7 Nm torque
Weight	600 ± 20 g
Housing material	Glass-filled nylon, nickel plated brass connectors
Housing color	Black
Material screw	Nickel-plated brass
Material label	Polyester with polycarbonate overlay
Ground label material	Nickel plated brass
Protection class	IP67 IP69K
Ambient temperature	-40...+70 °C
Storage temperature	-40...+85 °C
Relative humidity	15 to 95% (non-condensing)
Vibration test	Acc. to IEC 61131-2
- up to 20 g (at 10 up to 150 Hz)	For mounting on base plate or machinery
Shock test	according to IEC 61131-2
Electromagnetic compatibility	Acc. to IEC 61131-2
MTTF	98 years
MTTF note	acc. to SN 29500 (Ed. 99) 20 °C
Approvals and certificates	CE, cULus, Class I Div.2

Pinning and wiring diagram

	Ethernet Fieldbus cable (IP67 example): RSSD RSSD 441-2M ID number U-02482 or RSSD-RSSD-441-2M/S2174 ID number 6914218	Pin assignment (M12, D-coded)  1 = TD + 2 = RD + 3 = TD - 4 = RD - 1 = TD + 2 = RD + 3 = TD - 4 = RD -
	Slot 1: IO-Link Channels Extension cable (example): RKC 4.4T-2-RSC 4.4T ident-no. U5264 or RKC4.4T-2-RSC4.4T/TEL ident-no. 6625208	Pin Assignment  1 = V_{SENS} 2 = XSG 3 = GND 4 = C/Q 5 = PE 1 = V_{SENS} 2 = XSG 3 = GND 4 = C/Q 5 = PE
	Slot 2: RFID Channels Extension cable (example): RK 4.5T-2-RS 4.5T/S2501 ident-no. U3-01243 or RK4.5T-2-RS4.5T/S2500 ident-no. 6699200	.../S2500 Connectors  1 = BN (+) 2 = BK (Data) 3 = BU (GND) 4 = WH (Data) 5 = shield 1 = BN (+) 2 = WH (Data) 3 = BU (GND) 4 = BK (Data) 5 = shield .../S2501 Connectors  1 = BN (+) 2 = WH (Data) 3 = BU (GND) 4 = BK (Data) 5 = shield 1 = BN (+) 2 = WH (Data) 3 = BU (GND) 4 = BK (Data) 5 = shield
	Auxiliary Power Extension cable (example): RKC 4.4T-2-RSC 4.4T ident-no. U5264 or RKC4.4T-2-RSC4.4T/TEL ident-no. 6625208	Pin Assignment  1 = V_i 2 = V_o 3 = GND 4 = GND 5 = PE 1 = V_i 2 = V_o 3 = GND 4 = GND 5 = PE

Station LED status

LED	Color	Status	Description
IOs		OFF	No power
	RED	ON	Low power or station error
	RED	FLASHING (1 Hz)	I/O module configuration error
	RED	FLASHING (4 Hz)	No I/O module bus communication
	GREEN	ON	Station ok
	GREEN	FLASHING	Force mode active
BUS		OFF	Power Off
	GREEN	ON	Connected to Master
	GREEN	FLASHING	Ready
	GREEN	FLASHING 3x (1Hz)	ARGE Running
	RED	ON	Error
	RED	FLASHING	WINK
LNK/ACT	YELLOW	ON	DHCP/BOOTP Search
		OFF	No Link
	GREEN	ON	Link
	GREEN	FLASHING	Traffic
	YELLOW	ON	100 Mbit Linked

I/O LED status slot 1

LED	Color	Status	Description
D1 *		OFF	No diagnostics active
	RED	ON	Station error/ module bus communication failure
	RED	FLASHING (0.5Hz)	Diagnostics active (Slot 1)
IO-Link Mode Channels 1 ₀ ...1 ₃		OFF	Channel Status x = "0" (OFF), no diagnostics active
	GREEN	Flashing	IO-Link communication, Process data valid
	RED	ON	No IO-Link communication
		Flashing	Process Data Invalid
DI Mode Channels 1 ₀ ...1 ₃		OFF	Channel Status x = "0" (OFF)
	GREEN	ON	Channel Status x = "1" (ON)
XSG 1 ₀ ...1 ₇		OFF	Channel Status x = "0" (OFF)
	GREEN	ON	Channel Status x = "1" (ON)

* D1 LED also indicates gateway diagnostics

I/O LED status slot 2

LED	Color	Status	Description
D2 *		OFF	No diagnostics active
	RED	ON	Station error/ module bus communication failure
	RED	FLASHING (0.5Hz)	Diagnostics active (Slot 2)
RW0 / RW1		OFF	No tag present, no diagnostics active
	GREEN	ON	Tag present
	GREEN	FLASHING (2 Hz)	Data communication from / to tag active
	RED	ON	Error in the R/W head
	RED	FLASHING (2 Hz)	Short circuit in the transceiver supply

* D2 LED also indicates gateway diagnostics

Process Data Mapping of Each Protocol

EtherNet/IP™ I/O & Diagnostics Data Mapping

INPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Digital	0	DI 1 ₇	DI 1 ₆	DI 1 ₅	DI 1 ₄	DI 1 ₃	DI 1 ₂	DI 1 ₁	DI 1 ₀
	1	OCDO 1 ₇	OCDO 1 ₆	OCDO 1 ₅	OCDO 1 ₄	DVS 1 ₃	DVS 1 ₂	DVS 1 ₁	DVS 1 ₀
	2...15	IO-Link Read Data (depends on parameter settings)							
RFID 2 ₀	16	Done	Busy	Error	Trans. Conn.	Trans. On	TP	TFR	-
	17	Error Cat. (Category Code)							
	18	Error Desc. (Description Code)							
	19	-	-	-	-	-	-	-	-
	20...27	Read Data (8 Byte)							
RFID 2 ₁	28	Done	Busy	Error	Trans. Conn.	Trans. On	TP	TFR	-
	29	Error Cat. (Category Code)							
	30	Error Desc. (Description Code)							
	31	-	-	-	-	-	-	-	-
	32...39	Read Data (8 Byte)							
Diagnostics	40	Module number reporting diagnostic data							
	41	Replace Station	-	Diagnostics Active	-	-	-	-	-
Slot X* (ref. Byte 40)	42	IOL X ₀ EVT2	IOL X ₀ EVT1	IOL X ₀ PDINV	IOL X ₀ HWER	IOL X ₀ DSER	IOL X ₀ CFGER	-	OCDO X ₀
	43	IOL X ₀ GENER	IOL X ₀ OVL	IOL X ₀ VHIGH	IOL X ₀ VLOW	IOL X ₀ ULVE	IOL X ₀ LLVU	IOL X ₀ OTMP	IOL X ₀ PRMER
	44	IOL X ₁ EVT2	IOL X ₁ EVT1	IOL X ₁ PDINV	IOL X ₁ HWER	IOL X ₁ DSER	IOL X ₁ CFGER	-	OCDO X ₀
	45	IOL X ₁ GENER	IOL X ₁ OVL	IOL X ₁ VHIGH	IOL X ₁ VLOW	IOL X ₁ ULVE	IOL X ₁ LLVU	IOL X ₁ OTMP	IOL X ₁ PRMER
	46	IOL X ₂ EVT2	IOL X ₂ EVT1	IOL X ₂ PDINV	IOL X ₂ HWER	IOL X ₂ DSER	IOL X ₂ CFGER	-	OCDO X ₀
	47	IOL X ₂ GENER	IOL X ₂ OVL	IOL X ₂ VHIGH	IOL X ₂ VLOW	IOL X ₂ ULVE	IOL X ₂ LLVU	IOL X ₂ OTMP	IOL X ₂ PRMER
	48	IOL X ₃ EVT2	IOL X ₃ EVT1	IOL X ₃ PDINV	IOL X ₃ HWER	IOL X ₃ DSER	IOL X ₃ CFGER	-	OCDO X ₀
	49	IOL X ₃ GENER	IOL X ₃ OVL	IOL X ₃ VHIGH	IOL X ₃ VLOW	IOL X ₃ ULVE	IOL X ₃ LLVU	IOL X ₃ OTMP	IOL X ₃ PRMER
	50	-	-	-	-	-	RFID X ₀ Trans. PS Off	-	-
	51	-	-	-	-	RFID X ₀ Trans. PS Error	-	-	RFID X ₀ Trans. Hdw Error
	52	-	-	-	-	-	RFID X ₁ Trans. PS Off	-	-
	53	-	-	-	-	RFID X ₁ Trans. PS Error	-	-	RFID X ₁ Trans. Hdw Error
	54	-	-	-	-	-	-	-	-
	55	-	-	-	-	-	-	-	-
OUTPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Digital	0	DO 1 ₇	DO 1 ₆	DO 1 ₅	DO 1 ₄	-	-	-	-
	1	-	-	-	-	-	-	-	-
	2...15	IO-Link Write Data (depends on parameter settings)							
RFID 2 ₀	16	Transceiver	Next	Tag ID	Read	Write	Tag Info.	Trans. Info.	Reset
	17	-	-	-	-	-	Byte Count 2	Byte Count 1	Byte Count 0
	18	Address High Byte (MSB)							
	19	Address Low Byte (LSB)							
	20...27	Write Data (8 Byte)							
RFID 2 ₁	28	Transceiver	Next	Tag ID	Read	Write	Tag Info.	Trans. Info.	Reset
	29	-	-	-	-	-	Byte Count 2	Byte Count 1	Byte Count 0
	30	Address High Byte (MSB)							
	31	Address Low Byte (LSB)							
	32...39	Write Data (8 Byte)							

*The scheduled diagnostic information changes every 125 ms between Slot 1 and Slot 2, if both slots send active diagnostics.

Legend

GENER	Common error	EVT1	Maintenance events
VHIGH	Overvoltage	HWER	Hardware error
ULVE	Upper limit value exceeded	CFGER	Wrong or missing device

OTMP	Overtemperature	DVS	Data Valid Signal
EVT2	Out of specification error	OC	Over Current
PDINV	Process input data invalid	DIAG	Diagnostics
DSER	Data storage error	DO	Digital Output
OVL	Overload	DI	Digital Input
VLOW	Undervoltage	COM	Communication Lost Bit
LLVU	Lower limit value underrun	CFG	Configuration Error
PRMER	Parameterization error		

Modbus® TCP Register Mapping


	REG	Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
Inputs (RO)	0x0000	OCDO ₁₇	OCDO ₁₆	OCDO ₁₅	OCDO ₁₄	DVS ₁₃	DVS ₁₂	DVS ₁₁	DVS ₁₀	DI ₁₇	DI ₁₆	DI ₁₅	DI ₁₄	DI ₁₃	DI ₁₂	DI ₁₁	DI ₁₀	
	0x0001... 0x0007	IO-Link Read Data (depends on parameter settings)																
RFID 2 ₀	0x0008	Error Cat. (Category Code)									Done	Busy	Error	Trans. Conn.	Trans. On	TP	TFR	-
	0x0009	-	-	-	-	-	-	-	-	Error Desc. (Description Code)								
	0x000A... 0x000D	Read Data (4 Words)																
RFID 2 ₁	0x000E	Error Cat. (Category Code)									Done	Busy	Error	Trans. Conn.	Trans. On	TP	TFR	-
	0x000F	-	-	-	-	-	-	-	-	Error Desc. (Description Code)								
	0x0010... 0x0013	Read Data (4 Words)																
Status (RO)	0x0014	-	FCE	-	-	CFG	COM	VI low	VI high	VO low	VO high	OCVI	-	-	-	-	DIAG	
Diag. (RO)	0x0015	-	-	-	-	-	-	-	-	-	-	-	-	-	-	S2 DIAG	S1 DIAG	
Outputs (RW)	0x0800	-	-	-	-	-	-	-	-	DO ₁₇	DO ₁₆	DO ₁₅	DO ₁₄		-		-	
	0x0801... 0x0807	IO-Link Write Data (depends on parameter settings)																
	0x0808	-	-	-	-	-	Byte CNT 2	Byte CNT 1	Byte CNT 0	Trans.	Next	Tag ID	Read	Write	Tag In-fo.	Trans. Info.	Reset	
	0x0809	Address																
	0x080A... 0x080D	Write Data (4 Words)																
	0x080E	-	-	-	-	-	Byte CNT 2	Byte CNT 1	Byte CNT 0	Trans.	Next	Tag ID	Read	Write	Tag In-fo.	Trans. Info.	Reset	
	0x080F	Address																
	0x0810... 0x0813	Write Data (4 Words)																
I/O Diag. (RO)	0xA000	IOL ₁₀ GEN-ER	IOL ₁₀ OVL	IOL ₁₀ VHIGH	IOL ₁₀ VLOW	IOL ₁₀ ULVE	IOL ₁₀ LLVU	IOL ₁₀ OTMP	IOL ₁₀ PRMER	IOL ₁₀ EVT2	IOL ₁₀ EVT1	IOL ₁₀ PDINV	IOL ₁₀ HWER	IOL ₁₀ DSER	IOL ₁₀ CFGER	-	OC DO ₁₄	
	0xA001	IOL ₁₁ GEN-ER	IOL ₁₁ OVL	IOL ₁₁ VHIGH	IOL ₁₁ VLOW	IOL ₁₁ ULVE	IOL ₁₁ LLVU	IOL ₁₁ OTMP	IOL ₁₁ PRMER	IOL ₁₁ EVT2	IOL ₁₁ EVT1	IOL ₁₁ PDINV	IOL ₁₁ HWER	IOL ₁₁ DSER	IOL ₁₁ CFGER	-	OC DO ₁₅	
	0xA002	IOL ₁₂ GEN-ER	IOL ₁₂ OVL	IOL ₁₂ VHIGH	IOL ₁₂ VLOW	IOL ₁₂ ULVE	IOL ₁₂ LLVU	IOL ₁₂ OTMP	IOL ₁₂ PRMER	IOL ₁₂ EVT2	IOL ₁₂ EVT1	IOL ₁₂ PDINV	IOL ₁₂ HWER	IOL ₁₂ DSER	IOL ₁₂ CFGER	-	OC DO ₁₆	
	0xA003	IOL ₁₃ GEN-ER	IOL ₁₃ OVL	IOL ₁₃ VHIGH	IOL ₁₃ VLOW	IOL ₁₃ ULVE	IOL ₁₃ LLVU	IOL ₁₃ OTMP	IOL ₁₃ PRMER	IOL ₁₃ EVT2	IOL ₁₃ EVT1	IOL ₁₃ PDINV	IOL ₁₃ HWER	IOL ₁₃ DSER	IOL ₁₃ CFGER	-	OC DO ₁₇	
	0xA004	-	-	-	-	PS RFID 2 ₀	-	-	HW RFID 2 ₀							SCO RFID 2 ₀		
	0xA005	-	-	-	-	PS RFID 2 ₁			HW RFID 2 ₁							SCO RFID 2 ₁		

PROFINET® Process Data

Inputs	0	DI ₁₇	DI ₁₆	DI ₁₅	DI ₁₄	DI ₁₃	DI ₁₂	DI ₁₁	DI ₁₀
	1	OCDO ₁₇	OCDO ₁₆	OCDO ₁₅	OCDO ₁₄	DVS ₁₃	DVS ₁₂	DVS ₁₁	DVS ₁₀
	2...15	IO-Link Read Data (depends on parameter settings)							
	16	Done	Busy	Error	Trans. Conn.	Trans. On	TP	TFR	-
	17	Error Cat. (Category Code)							
	18	Error Desc. (Description Code)							
	19	-	-	-	-	-	-	-	-

	20...27	Read Data (8 Byte)							
	28	Done	Busy	Error	Trans. Conn.	Trans. On	TP	TFR	-
	29	Error Cat. (Category Code)							
	30	Error Desc. (Description Code)							
	31	-	-	-	-	-	-	-	-
	32...39	Read Data (8 Byte)							
Outputs	0	DO 1 ₇	DO 1 ₆	DO 1 ₅	DO 1 ₄	-	-	-	-
	1	-	-	-	-	-	-	-	-
	2...15	IO-Link Write Data (depends on parameter settings)							
	16	Transceiver	Next	Tag ID	Read	Write	Tag Info.	Trans. Info.	Reset
	17	-	-	-	-	-	Byte Count 2	Byte Count 1	Byte Count 0
	18	Address High Byte (MSB)							
	19	Address Low Byte (LSB)							
	20...27	Write Data (8 Byte)							
	28	Transceiver	Next	Tag ID	Read	Write	Tag Info.	Trans. Info.	Reset
	29	-	-	-	-	-	Byte Count 2	Byte Count 1	Byte Count 0
	30	Address High Byte (MSB)							
	31	Address Low Byte (LSB)							
	32...39	Write Data (8 Byte)							

Accessories

Type code	Ident-No.		Dimension drawing
LOCK-EURO-C	A0885	Locking guard for straight eurofast™ C-body connectors (RKC, RKCV, RSC, RSCV) in a Class I, Division 2 installations	
LOCK-EURO-C (10/BAG)	A0886	Locking guard for straight eurofast™ C-body connectors (RKC, RKCV, RSC, RSCV) in a Class I, Division 2 installations	