




FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 	 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 	CONTACT CARRIER MATERIAL	NYLON OR TPU
		MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
		RATED CURRENT [A]	4.0 A
		RATED VOLTAGE [V]	250 V
		OUTER CABLE JACKET MATERIAL/COLOR	PVC/GRAY
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	4x22 AWG
		TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
		PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

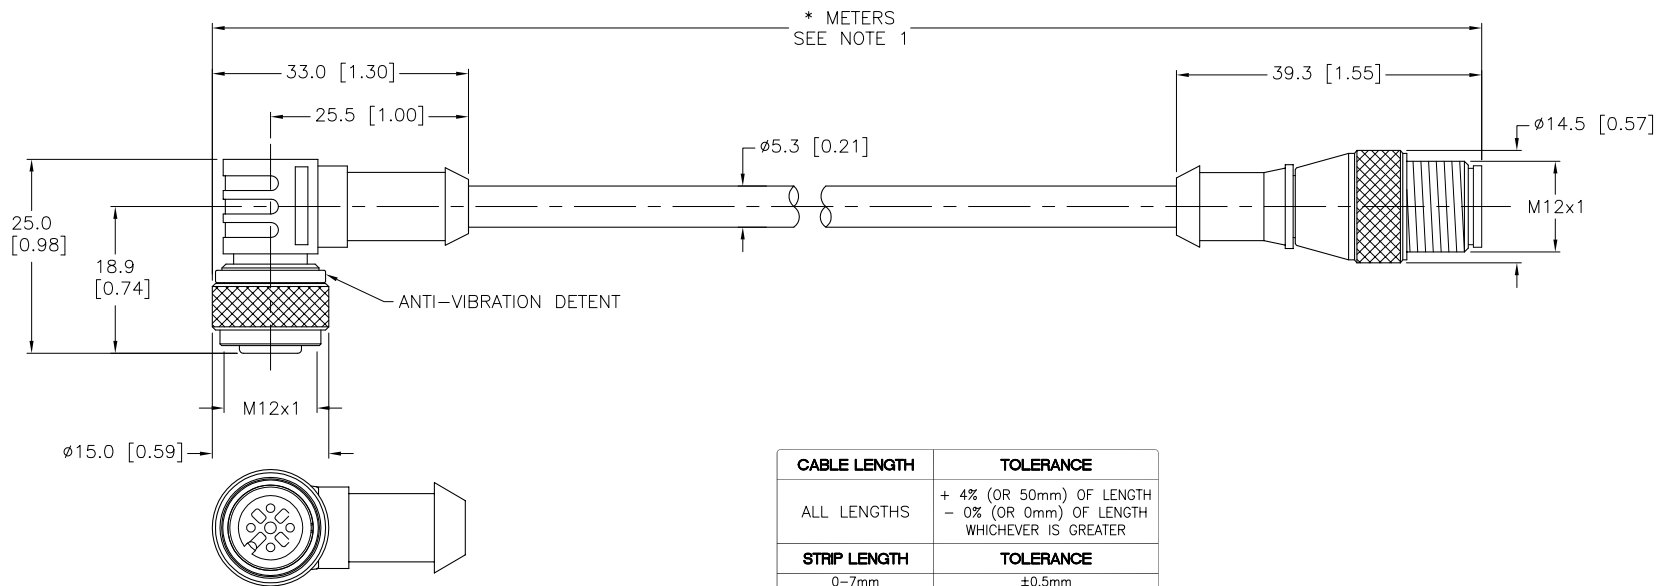


CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/SV" DESIGNATES CUSTOM PACKAGING FOR VENDING MACHINES.

E	UPDATE CABLE DIAMETER	KMY	12/30/11	37143
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. 		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com TURCK inc <i>High Technology Sensors and Automation Controls</i>						
1.						DRFT	DJW	DATE	04/23/07		DESCRIPTION WK 4.4T-*—RS 4.4T/SV	
2.						APVD		SCALE	1=1.0			
3.						UNIT OF MEASUREMENT				IDENTIFICATION NO.		REV
4.				MILLIMETER [INCH]						E		
				DO NOT SCALE THIS DRAWING				FILE: 777007798		SHEET 1 OF 1		
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY										
SEE SPECIFICATIONS												
FINISH												
SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION										