


## excom I/O System Relay Module, 6-channel DO60R-N



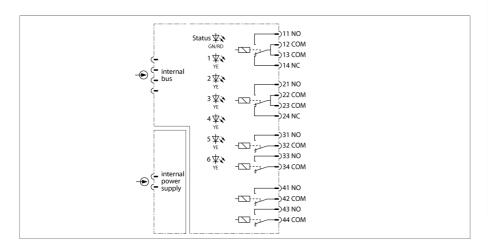

The relay module DO60R-N is used for the connection of non-intrinsically safe actuators such as valves or indicator lights.

The outputs are designed as zero-potential relay contacts.

- 2 x changeover contacts (channel 1 and 2)
- 4 x NO contacts (channel 3 to 6)

The channels 3/4 and 5/6 are separately switchable to changeover function. For this, an external bridge at the terminals is needed.

## Note:

To protect the module rack, the contact circuits inside the DO60R-N module are shielded by fuses (1.5 AT Ceramic). The module must be replaced after tripping the fuses. The connections 12-13 and 22-23 are not further protected and should maximally be loaded with the switching current of a relay contact. Use preferably terminal 12 resp. 22 for connection.

For non-destructive operation, even in the event of a short circuit, a back-up fuse with a fuse integral <2.1A²s must be used (e.g. ES-KA 522.714).

Status and error messages of the single outputs and the module are indicated via LEDs on the front.

- Relay output for higher switching capacity
- NO/NC configurable output
- Configurable as 4 x changeover contact
- Configurable as 6 x NO contact



## **Dimensions**

	118	
106	18	

DO60R-N
6884196
Via module rack, central power supply module
≤ 2 W
Complete galvanic isolation
6
6 x relays (2 x changeover contacts, 4 x NO)
12 VUC 115 VUC
≥ 10 mA
≤ 1 A (60 VAC/60 VDC)
≤ 0.4 A (115 VAC/115 VDC)
IECEx TUR 21.0012X
1 × green/red
6 × yellow
Plastic
module, plugged on rack
IP20
-40+70 °C
≤ 93 % at 40 °C acc. to IEC 60068-2-78
Acc. to IEC 60068-2-6
Acc. to IEC 60068-2-27
Acc. to EN 61326-1
Acc. to Namur NE21
224 years acc. to SN 29500 (Ed. 99) 40 °C
18 x 118 x 106 mm
ATEX
cFMus
cFM
IECEx
CE