


Isolating switching amplifier 1-channel IM12-DI03-1S-2R-S/24VDC/CC

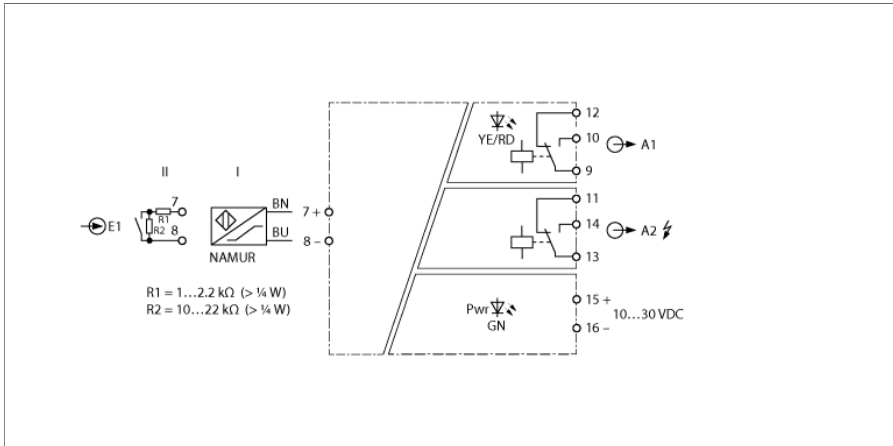


Sensors according to EN 60947-5-6 (NAMUR) or potential-free contacts can be connected to the IMX12-DI03-1S-2R-S/24VDC/CC isolating switching amplifier. The device can be installed in zone 2. The device can be switched between 1-channel operation with signal doubling or 1-channel operation with alarm message output using DIP switches. The output circuits are equipped with two changeover relays. The device complies with the requirements of NE21.

The devices feature DIP switches on the front. This allows to select between the output mode, the input circuit monitoring, as well as toggle between signal duplication and 1-channel operation. When using mechanical contacts, either line monitoring must be switched off or the contact must be wired with resistors (see wiring diagram).

The green LED indicates operational readiness. An error in the input circuit causes the red LED to flash according to NE44. The relay of the corresponding output circuit drops out.

The device can be used in safety circuits up to SIL2 (high and low demand according to IEC 61508).


The device is equipped with removable spring type terminals.

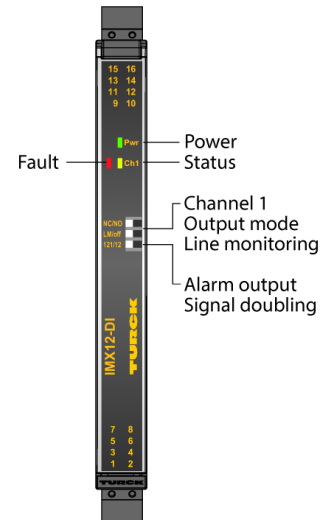

- Relay output (changeover contact)
- Alarm output (changeover contact)
- Switchable between: Alarm output or signal doubling
- Output mode adjustable (open-circuit/closed current mode)
- Input circuits monitored for wire break/short circuit (ON/OFF switchable)
- Complete galvanic isolation
- Input reverse-polarity protected
- Removable spring type terminals
- ATEX use in Zone 2, cUL
- SIL 2

Dimensions

Type	IM12-DI03-1S-2R-S/24VDC/CC
ID	7580030
Operating voltage U_s	10...30 VDC
Power dissipation, typical	$\leq 1.03 \text{ W}$
NAMUR input	
NAMUR	EN 60947-5-6
Input circuit monitoring	on/off switchable
No-load voltage	8.2 VDC
Short-circuit current	8.2 mA
Input resistance	1 k Ω
Cable resistance	$\leq 50 \Omega$
Switch-on threshold	1.75 mA
Switch-off threshold	1.55 mA
Wire breakage threshold	$\leq 0.06 \text{ mA}$
Short-circuit threshold	$\geq 6.4 \text{ mA}$
Output circuits	
Output circuits (digital)	2 x relays (change-over)
Output switching voltage relay	$\leq 30 \text{ VDC} / \leq 250 \text{ VAC}$
Switching current per output	$\leq 2 \text{ A}$
Switching capacity per output	$\leq 500 \text{ VA}/60 \text{ W}$
Switching frequency	$\leq 15 \text{ Hz}$
Contact quality	AgNi, 0.3 μ Au
Galvanic isolation	
Input 1 to output 1	375 V peak value acc. to EN 60079-11
Input 1 to supply	375 V peak value acc. to EN 60079-11
Output 1 to supply	300 V RMS acc. to EN 50178 and EN 61010-1
Output 2 to supply	300 V RMS acc. to EN 50178 and EN 61010-1
Important note	For Ex-applications the values specified in the corresponding Ex certificates (ATEX, IECEx, UL, etc.) apply.
Important note	If the device is used in applications to achieve functional safety according to IEC 61508, the safety manual must be used. Information in the data sheet are not valid for functional safety.
Use in SIL safety circuits	SIL 2 acc. to IEC 61508



Mechanical data		
Protection class	IP20	
Flammability class acc. to UL 94	V-0	
Dimensions	120 x 12.5 x 128 mm	
Weight	164 g	
Mounting instructions	DIN rail (NS35)	
Housing material	Plastic, Polycarbonate/ABS	
Electrical connection	Removable spring-type terminals, 2-pin	
Terminal cross-section	0.2...2.5 mm² (AWG: 24...14)	
Environmental conditions	Operating height	Up to 2000 m above sea level
	Pollution degree	II
	Surge/Overvoltage category	II (EN 61010-1)
	Standards used	
	Voltage resistance and insulation	
		EN 50178
		EN 61010-1
		EN 50155
		GL VI-7-2
	Shock	
		EN 61373 class B
		EN 50155
		GL VI-7-2
		EN 60068-2-6
		EN 60068-2-27
	Temperature	
		EN 60068-2-1 Ad
		EN 50155
		GL VI-7-2
		EN 60068-2-2 Bd
		EN 60068-2-1
	Air humidity	
		EN 60068-2-38
	EMC	
		EN 50155
		GL VI-7-2
		NE21
		EN 61326-1
		EN 61326-3-1
		EN 61000-4-2
		EN 61000-4-3
		EN 61000-4-4
		EN 61000-4-5
		EN 61000-4-6
		EN 61000-4-11
		EN 61000-4-29
		EN 55011
		EN 55016
		EN 50121-3-2
		EN 61000-6-2

Accessories

Type code	Ident-No.		Dimension drawing
WM1 WIDER-STANDSMODUL	0912101	The resistor module WM1 meets the requirements for line monitoring between a mechanical contact and a TURCK signal processor. The input circuit of the signal processor is designed for sensors acc. to EN60947-5-6 (NAMUR) and equipped with a wire-break and short-circuit monitoring function.	
IMX12-SC-2X-4BK	7580940	Screw terminals for IM(X)12 modules; included in delivery: 4 pcs. of 2-pin black terminals	
IMX12-CC-2X-4BK	7580942	Spring terminals for IM(X)12 modules; included in delivery: 4 pcs. black terminals, 2-pin	