


SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON OR TPU
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	STAINLESS STEEL/PASSIVATED
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
OUTER CABLE JACKET MATERIAL/COLOR	PVC/GRAY
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	5x22 AWG
DRAIN/SHIELD	24 AWG DRAIN/ALUMINIZED-POLYESTER FOIL SHIELD
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

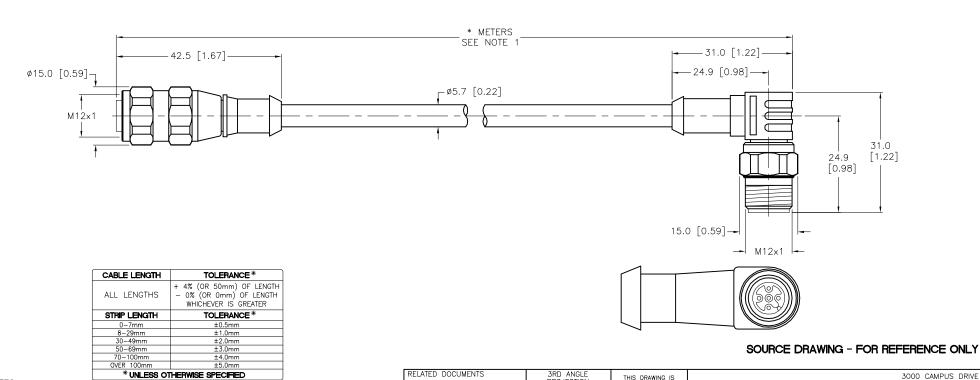

NOTES:

- 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. /S618" DESIGNATES CABLE WITH FOIL SHIELD AND DRAIN. DRAIN IS NOT CONNECTED AT THE CONNECTOR.

	4.
	MATERIAL
	SEE
	FINISH
33971	055
33371	SEE

2. 3.

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR **SPECIFICATIONS**

SPECIFICATIONS

REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION

PROJECTION

DESCRIPTION

FILE: 777008572

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax

DATE 06/06/07 RWC SCALE 1=1.0 APVD

UNIT OF MEASUREMENT

THIS DRAWING IS CONFIDENTIAL AND THE

PROPERTY OF TURCK INC. USE OF THIS

DOCUMENT WITHOUT WRITTEN PERMISSION IS

PROHIBITED.

MILLIMETER [INCH]

www.turck.us RKV 4.5T-*-WSV 4.5T/S618

IDENTIFICATION NO. REV

DRAWING PROCESSED AS PART OF ECO 33971 CBM 04/06/11 DESCRIPTION DATE ECO NO. DO NOT SCALE THIS DRAWING

SHEET 1 OF 1