


SPECIFICATIONS						
CONTACT CARRIER MATERIAL/COLOR	TPU/YELLOW					
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW					
CONTACT MATERIAL/PLATING	BRASS/GOLD					
COUPLING NUT MATERIAL/COLOR	NYLON/BLACK					
RATED CURRENT [A]	10.0 A					
RATED VOLTAGE [V]	600 V					
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW					
CONDUCTORS	4x16 AWG					
CONDUCTOR INSULATION MATERIAL	PVC					
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)					
PROTECTION CLASS	NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K					

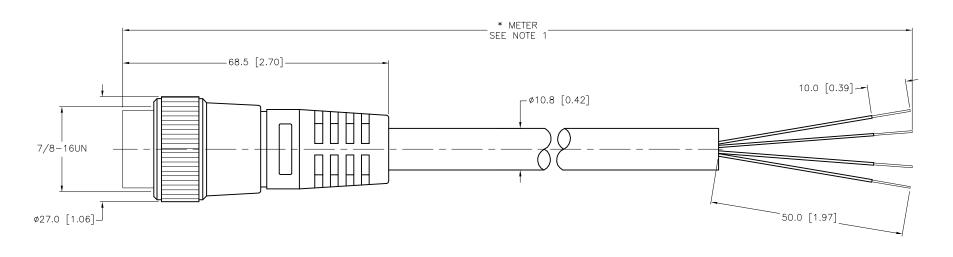

CABLE LENGTH	TOLERANCE *					
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER					
STRIP LENGTH	TOLERANCE *					
0-7mm	±0.5mm					
8-29mm	±1.0mm					
30-49mm	±2.0mm					
50-69mm	±3.0mm					
70-100mm	±4.0mm					
OVER 100mm	±5.0mm					
* UNILESS OTHERWISE SPECIFIED						

NOTES:

- 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. STRIP AND TIN LENGTHS ARE FOR REFERENCE ONLY; SOME LENGTHS MAY NOT BE STRIPPED AND TINNED.

П	UPDATE PROTECTION CLASS	СВМ	04/13/21	76628
REV	DESCRIPTION	BY	DATE	ECO NO.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK			MINNEAF	CAMPUS POLIS, MN 00-544-1	55441
2. 3. 4.		INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		RC	(763	3) 553-7 3) 553-0 ww.turck.u	300 708 fax
MATERIAL		DRFT RDS	DATE 02/24/10	DESCRIPTION	DV 46 *M		
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD	SCALE 1=1.0		RY 46-*M		
	DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		IDENTIFICATION NO.			REV
FINISH	CONTACT TURCK	MILLIMETE	ER[INCH]	IDENTIFICATION NO.			KEV
SEE SPECIFICATIONS	FOR MORE INFORMATION	IANITENAIE I C					Ł
		DO NOT SCALE THIS DRAWING		FILE: 777008731		SHEET	1 OF 1
•						-	