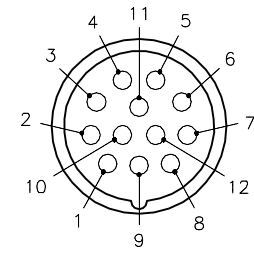
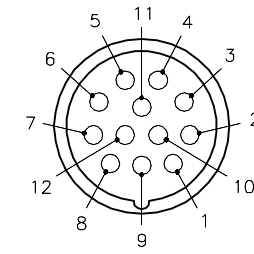


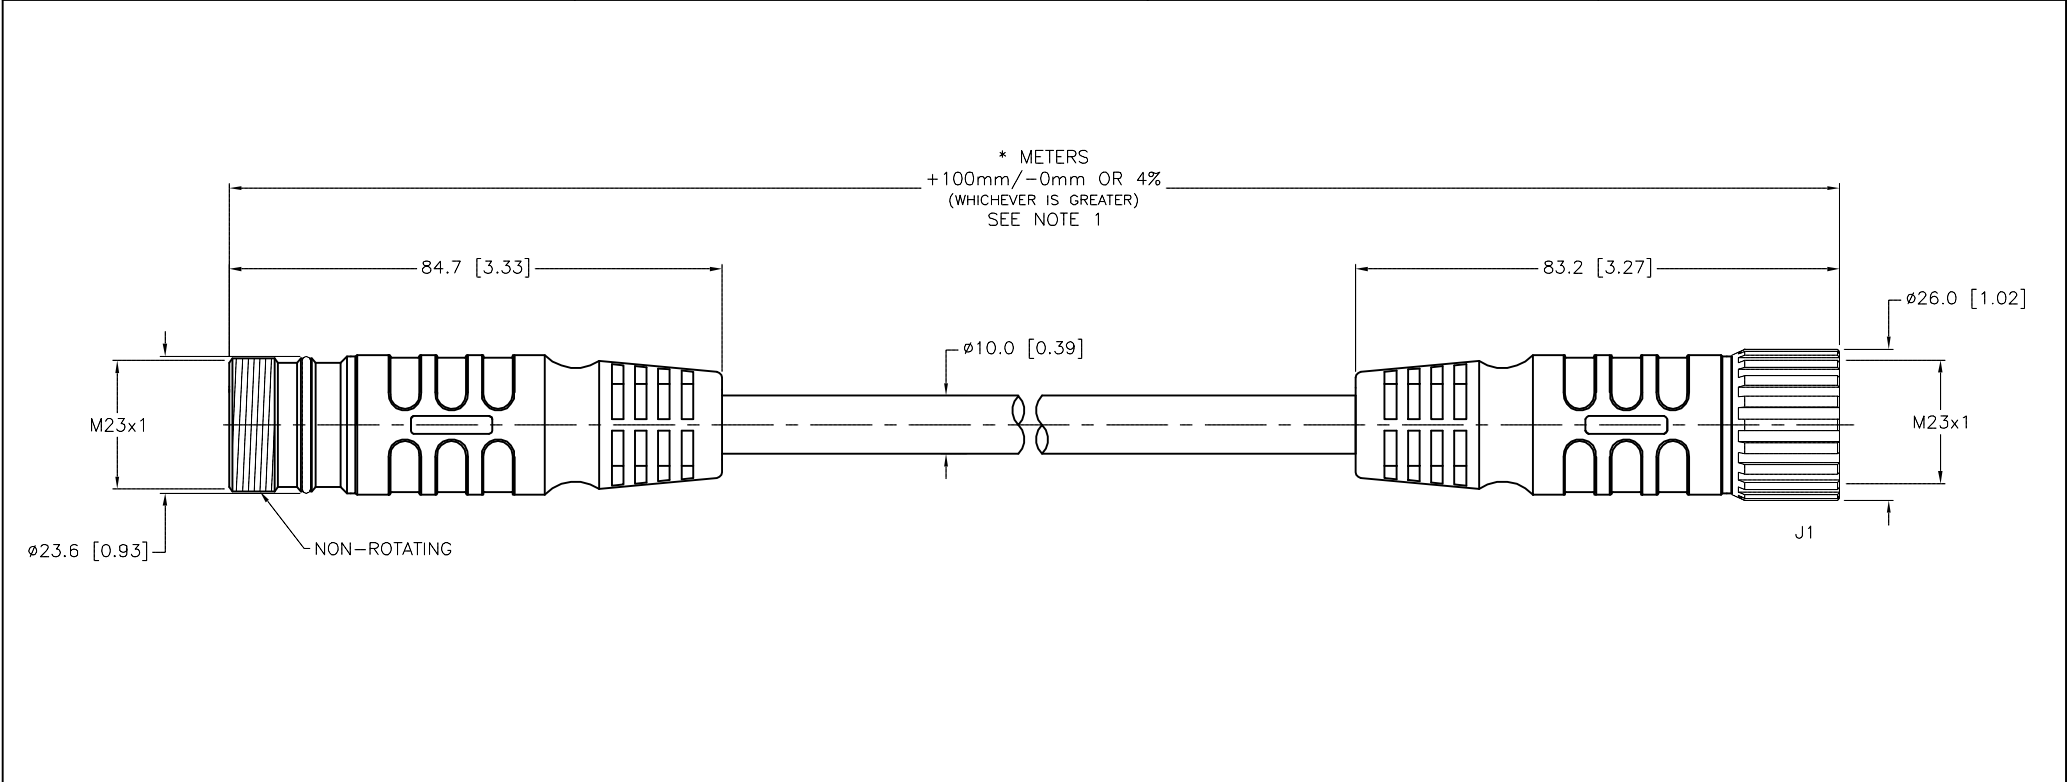



MALE END VIEW		FEMALE END VIEW	SPECIFICATIONS	
 <div>1 = BROWN 2 = N/C 3 = BLUE 4 = WHITE 5 = GREEN 6 = YELLOW 7 = GRAY 8 = PINK 9 = RED 10 = BLACK 11 = VIOLET 12 = GREEN/YELLOW</div>		 <div>1 = BROWN 2 = N/C 3 = BLUE 4 = WHITE 5 = GREEN 6 = YELLOW 7 = GRAY 8 = PINK 9 = RED 10 = BLACK 11 = VIOLET 12 = GREEN/YELLOW</div>	CONTACT CARRIER MATERIAL	NYLON or PBT
 M23 connector		 M23 connector	MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	6.0 A
			RATED VOLTAGE [V]	300 V
			OUTER JACKET MATERIAL/COLOR	TPU/YELLOW
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBER OF CONDUCTORS [AWG]	11x18 AWG
			DRAIN/SHIELD	20 AWG/ALUM.-POLYESTER FOIL
			TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)
			PROTECTION CLASS	IEC IP67



SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS. 2. "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE JACKET.				RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
				MATERIAL SEE SPECIFICATIONS		DRFT KMY APVD T.S.		DATE 02/05/13 SCALE 1=1.3		DESCRIPTION CSSM CKM 12-11-*/S90	
				FINISH SEE SPECIFICATIONS		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV A	
A DRAWING RELEASE				KMY 03/11/13							
REV DESCRIPTION				BY DATE ECO NO.				DO NOT SCALE THIS DRAWING		FILE: 777008952	
										SHEET 1 OF 1	