

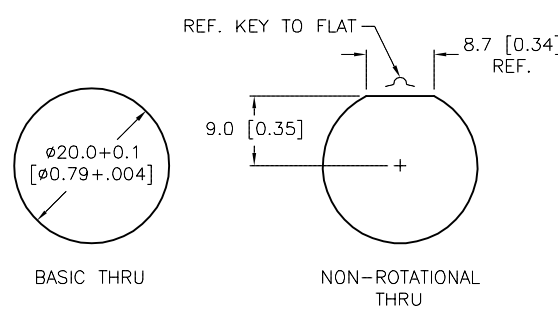
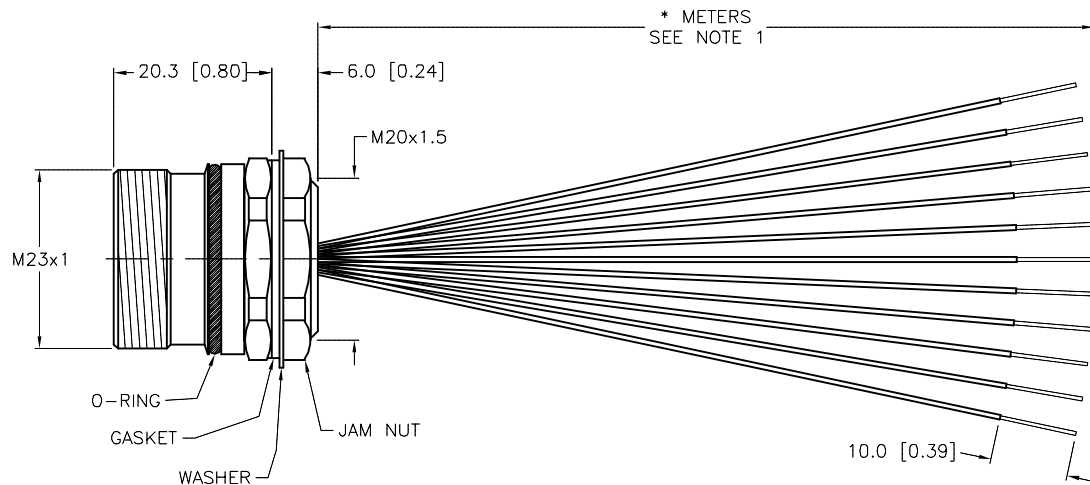


FEMALE END VIEW	PANEL CUTOUT (TYPICAL)	SPECIFICATIONS	
 1 = ORANGE 2 = BLUE 3 = WHITE/BLACK 4 = RED/BLACK 5 = GREEN/BLACK 6 = ORANGE/BLACK 7 = BLUE/BLACK 8 = N/C 9 = GREEN/YELLOW 10 = RED 11 = WHITE 12 = BLACK	 BASIC THRU NON-ROTATIONAL THRU	CONTACT CARRIER MATERIAL/COLOR	NYLON or PBT/GRAY
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		CONNECTOR HOUSING MATERIAL/PLATING	BRASS/NICKEL
		O-RING/GASKET MATERIAL	RUBBER (NITRILE OR FPM)
		RATED CURRENT [A]	6.0 A
		RATED VOLTAGE [V]	300 V
		CONDUCTOR INSULATION MATERIAL	PVC
		MAXIMUM CONDUCTOR SIZE (AWG)	11x18 AWG
		TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
		PROTECTION CLASS	IEC IP67
		MAXIMUM PANEL THICKNESS	3.5 [0.138]

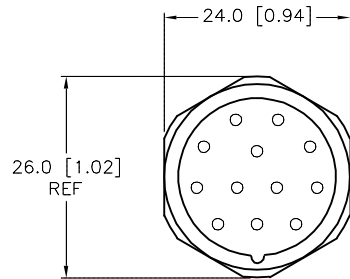


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RWC	DATE	06/22/05	DESCRIPTION CKBF 12-11-*	
		APVD		SCALE	1=1.0		
SEE SPECIFICATIONS			UNIT OF MEASUREMENT			IDENTIFICATION NO.	
FINISH			MILLIMETER [INCH]				
SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING			FILE: 777009426		
					SHEET 1 OF 1		