






MALE END VIEW		FEMALE END VIEW	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL	TPU
<p>A = BROWN B = BLUE C = WHITE D = GREEN E = YELLOW F = GRAY G = PINK H = RED J = BLACK K = ORANGE L = TAN M = VIOLET</p>			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
 M16 connector		 M16 connector	CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	4.0 A
			RATED VOLTAGE [V]	125 VAC/VDC
			OUTER JACKET MATERIAL/COLOR	PVC/BLACK
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBER OF CONDUCTORS [AWG]	12x22 AWG
			DRAIN/SHIELD	24 AWG DRAIN/POLYESTER FOIL SHIELD
			TEMPERATURE RANGE	-40°C TO +105°C (-40°F TO +221°F)
			PROTECTION CLASS	MEETS IEC IP67




CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	

NOTES:

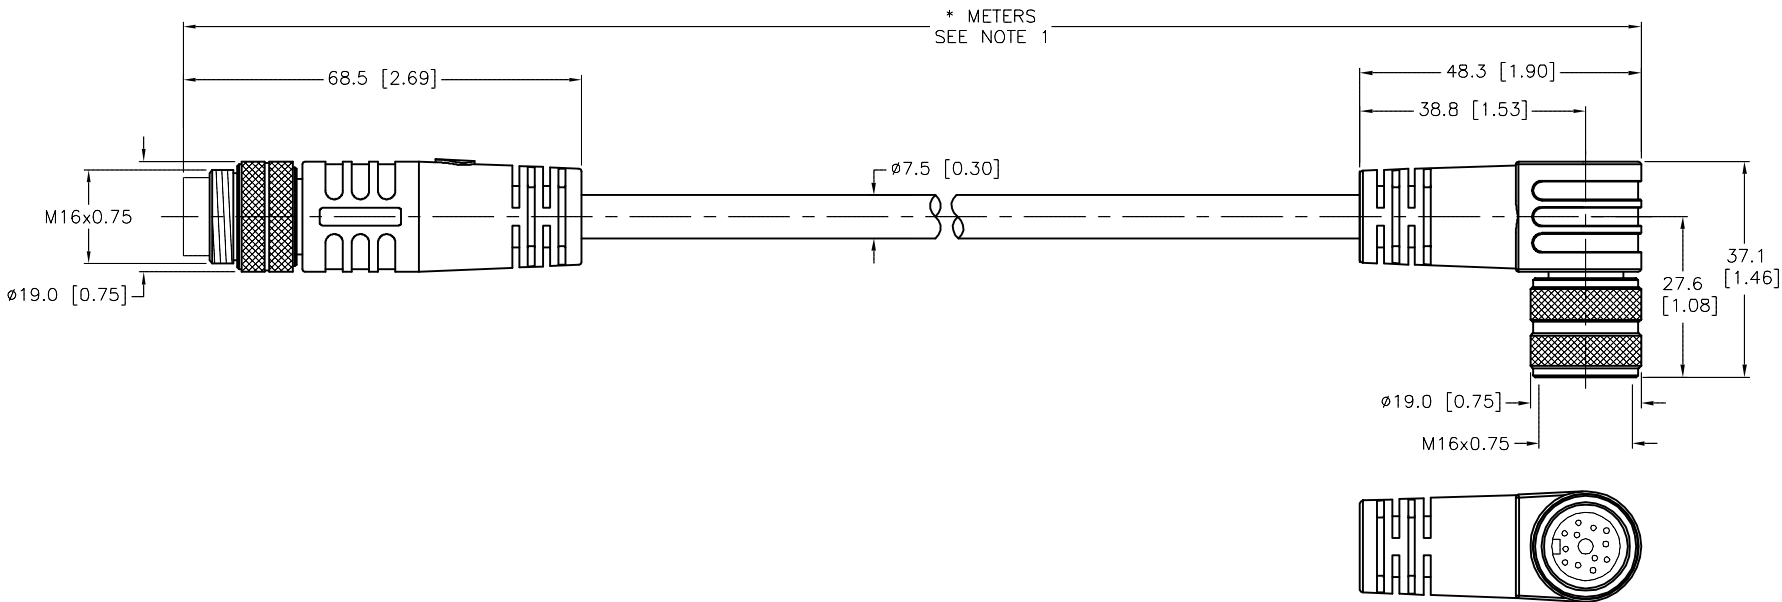1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

A	DRAWING RELEASE	RDS	05/30/13	
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1.				DRFT RDS		DATE 05/08/13	
2.				APVD J.B.		SCALE 1=1.3	
3.				UNIT OF MEASUREMENT		DESCRIPTION	
4.				MILLIMETER [INCH]		BSM BKWM 12-967-*	
MATERIAL		SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		IDENTIFICATION NO.	
FINISH		SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING		REV	
						A	
						FILE: 777009857	
						SHEET 1 OF 1	

SOURCE DRAWING - FOR REFERENCE ONLY