


FEMALE END VIEW

1 = RED
2 = WHITE
3 = WHITE/BLACK
4 = BLUE
5 = ORANGE
6 = BLACK
7 = GREEN/BLACK
8 = GREEN/YELLOW
9 = RED/BLACK




power
fast



- 1 = RED
2 = WHITE
3 = WHITE/BLACK
4 = BLUE
5 = ORANGE
6 = BLACK
7 = GREEN/BLACK
8 = GREEN/YELLOW
9 = RED/BLACK



SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON or PBT
MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
MANUFACTURER RATED CURRENT [A]	20 A (PINS 4,6,8), 7 A (ALL OTHER PINS)
UL RATED CURRENT [A]	15 A (PINS 4,6,8), 6 A (ALL OTHER PINS)
RATED VOLTAGE [V]	150 V
OUTER CABLE JACKET MATERIAL/COLOR	PVC/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	3x14 AWG; 6x18 AWG
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS IEC IP67

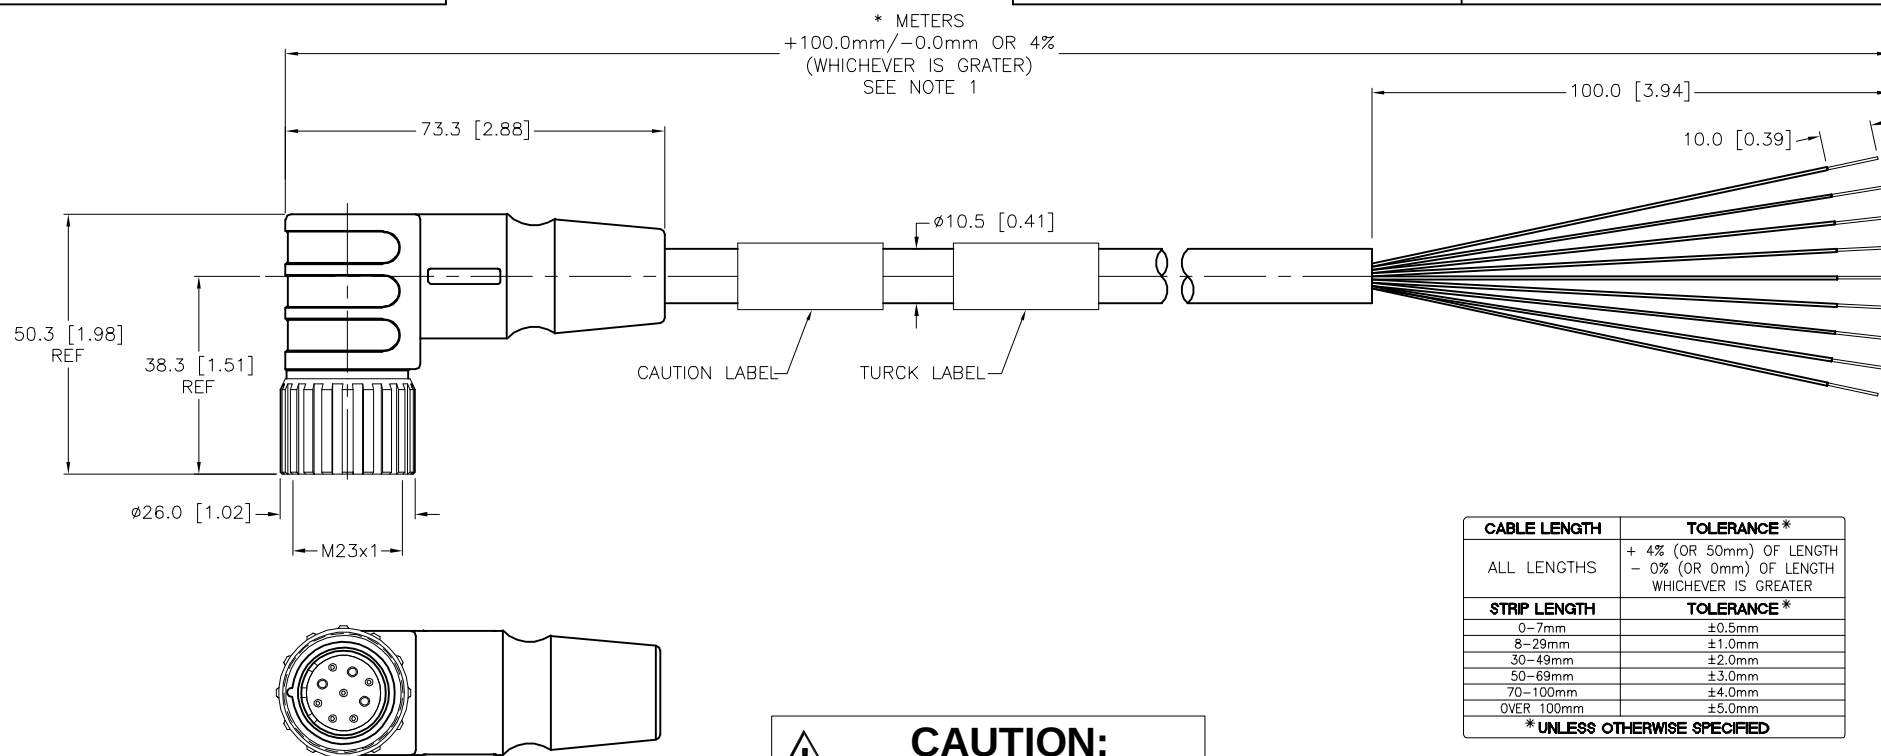

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	



CAUTION:


**⚠ RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD**

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

F	UPDATE RATED CURRENT	NF	11/07/18	66623
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		TURCK	
							
	MATERIAL	DRFT RWC	DATE 07/11/07	DESCRIPTION CKWM 94-080-*			
	SEE SPECIFICATIONS	APVD L.M.	SCALE 1=1.5				
FINISH	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.		REV F	
SEE SPECIFICATIONS							