


micro fast.

SPECIFICATIONS				
CONTACT CARRIER MATERIAL	NYLON OR TPU			
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW			
CONTACT MATERIAL/PLATING	BRASS/GOLD			
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL			
RATED CURRENT [A]	4.0 A			
RATED VOLTAGE [V]	250 V			
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW			
CONDUCTOR INSULATION MATERIAL	PVC			
NUMBER OF CONDUCTORS [AWG]	5x22 AWG			
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)			
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K			

SOURCE DRAWING - FOR REFERENCE ONLY

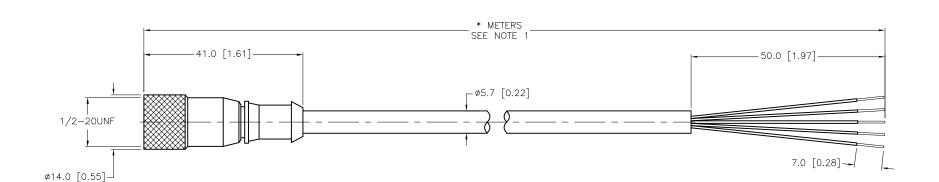

CABLE LENGTH	TOLERANCE *					
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER					
STRIP LENGTH	TOLERANCE *					
0-7mm	±0.5mm					
8-29mm	±1.0mm					
30-49mm	±2.0mm					
50-69mm	±3.0mm					
70-100mm	±4.0mm					
OVER 100mm	±5.0mm					
* UNLESS OTHERWISE SPECIFIED						

NF 09/07/17

DATE

60913

ECO NO.

## NOTES:

REV DESCRIPTION

UPDATE CONDUCTOR COLOR

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

	RELATED DOCUMENTS  1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		IRC	MINNEAPO 1-800 (763) (763)	AMPUS DLIS, MN 1-544-7 553-7 553-0 w.turck.u	55441 7769 300 708 fax
	MATERIAL		DRFT RWC	DATE 07/18/06	DESCRIPTION			
	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD	SCALE 1=1.0		KB 5T-*		
		DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		IDENTIFICATION NO.			REV
	FINISH	CONTACT TURCK	MILLIMETE	ER[INCH]	IDENTIFICATION NO.			1/2
-		FOR MORE	IVIILLIIVIL I L					$\cup$
	SEE SPECIFICATIONS	INFORMATION						_
			DO NOT SCALE	THIS DRAWING	FILE: 777010008		SHEET	1 OF 1