



1			
SPECIFICATIONS			
CONTACT CARRIER MATERIAL	NYLON OR TPU		
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW		
CONTACT MATERIAL/PLATING	BRASS/GOLD		
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL		
RATED CURRENT [A]	4.0 A		
RATED VOLTAGE [V]	250 V		
OUTER CABLE JACKET MATERIAL/COLOR	PVC/BLACK		
CONDUCTOR INSULATION MATERIAL	PVC		
NUMBER OF CONDUCTORS [AWG]	5x22 AWG		
DRAIN/SHIELD	24 AWG/ALUMPOLYESTER FOIL		
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)		
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68		

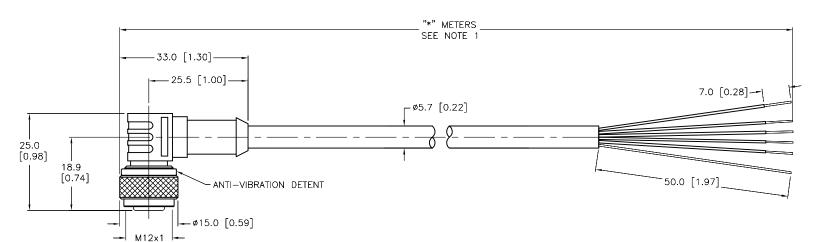



CABLE LENGIN	IOLEHANCE "		
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER		
STRIP LENGTH	TOLERANCE*		
0-7mm	±0.5mm		
8-29mm	±1.0mm		
30-49mm	±2.0mm ±3.0mm ±4.0mm		
50-69mm			
70-100mm			
OVER 100mm	±5.0mm		
* UNLESS OT	HERWISE SPECIFIED		

RELATED DOCUMENTS

SEE SPECIFICATIONS

## SOURCE DRAWING - FOR REFERENCE ONLY

## NOTES:

- 1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. "/S1554" DESIGNATES BLACK PVC CABLE WITH DRAIN AND SHIELD. DRAIN IS NOT CONNECTED AT THE CONNECTOR.

О	DRAWING PROCESSED AS PART OF ECO 33971	СВМ	04/06/11	33971
REV	DESCRIPTION	BY	DATE	ECO NO.

2. 3. 4.	<b>\$</b>
MATERIAL	
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY
FINISH	

3RD ANGLE PROJECTION

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS
CONFIDENTIAL AND THE
PROPERTY OF TURCK
INC. USE OF THIS
DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED. DATE 06/06/06 MJM SCALE 1=1.0 UNIT OF MEASUREMENT

DESCRIPTION

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us

WK 4.5T-\*/S1554

MILLIMETER [ INCH ]

IDENTIFICATION NO. REV FILE: 777010160 SHEET 1 OF 1 DO NOT SCALE THIS DRAWING