


MALE END VIEW


A = BLUE
B = BROWN
C = WHITE
D = BLACK

CONNECTOR
TYPE/STYLE — MS 3106M
SHELL SIZE — 14S
INSERT ARRANGEMENT — 2P



CONNECTOR TYPE	MIL-DTL-5015
----------------	--------------

CONTACT CARRIER MATERIAL	NEOPRENE
MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
CONTACT MATERIAL/PLATING	COPPER ALLOY/SILVER
COUPLING NUT MATERIAL/PLATING	ALUMINUM ALLOY/OLIVE DRAB CHROMATE
MOLD SLEEVE	ALUMINUM/BLACK ANODIZED
RATED CURRENT [A]	8.0 A
RATED VOLTAGE [V]	200 V
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS	4x18 AWG
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67,IP68
CONNECTOR TYPE	MIL-DTL-5015

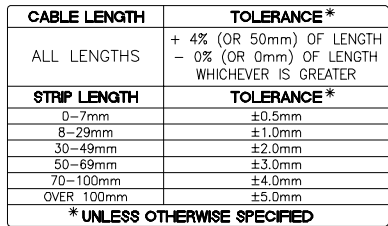

G	UPDATED CURRENT RATING	ER	05/19/20	75874
REV	DESCRIPTION	BY	DATE	ECO NO.

SHEET 1 OF 1