


MALE END VIEW




A = BLUE	P = WHITE/GREY
B = WHITE	R = BROWN
C = BLACK	S = BLACK/GREY
D = BROWN/RED	T = BROWN/GREEN
E = BLUE/RED	U = BLUE/GREEN
F = WHITE/RED	V = WHITE/GREEN
G = BLACK/RED	W = GREEN/YELLOW
H = BROWN/YELLOW	X = BLACK/GREEN
J = BLUE/YELLOW	Y = BLACK/ORANGE
K = WHITE/YELLOW	Z = WHITE/ORANGE
L = BLACK/YELLOW	a = BROWN/ORANGE
M = BROWN/GREY	b = BLUE/ORANGE
N = BLUE/GREY	c = N/C

CONNECTOR
TYPE/STYLE - MS 3116M
SHELL SIZE - 16
INSERT ARRANGEMENT - 26P

SPECIFICATIONS

CONTACT CARRIER MATERIAL	NEOPRENE
MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
CONTACT MATERIAL/PLATING	COPPER ALLOY/GOLD
COUPLING NUT MATERIAL/PLATING	ALUMINUM ALLOY/OLIVE DRAB CHROMATE
MOLD SLEEVE	ALUMINUM/BLACK ANODIZED
RATED CURRENT [A]	3.0 A
RATED VOLTAGE [V]	300 V
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS	25x22 AWG
DRAIN/SHIELD	22 AWG/ALUMINUM-POLYESTER FOIL
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
CONNECTOR TYPE	MIL-DTL-26482

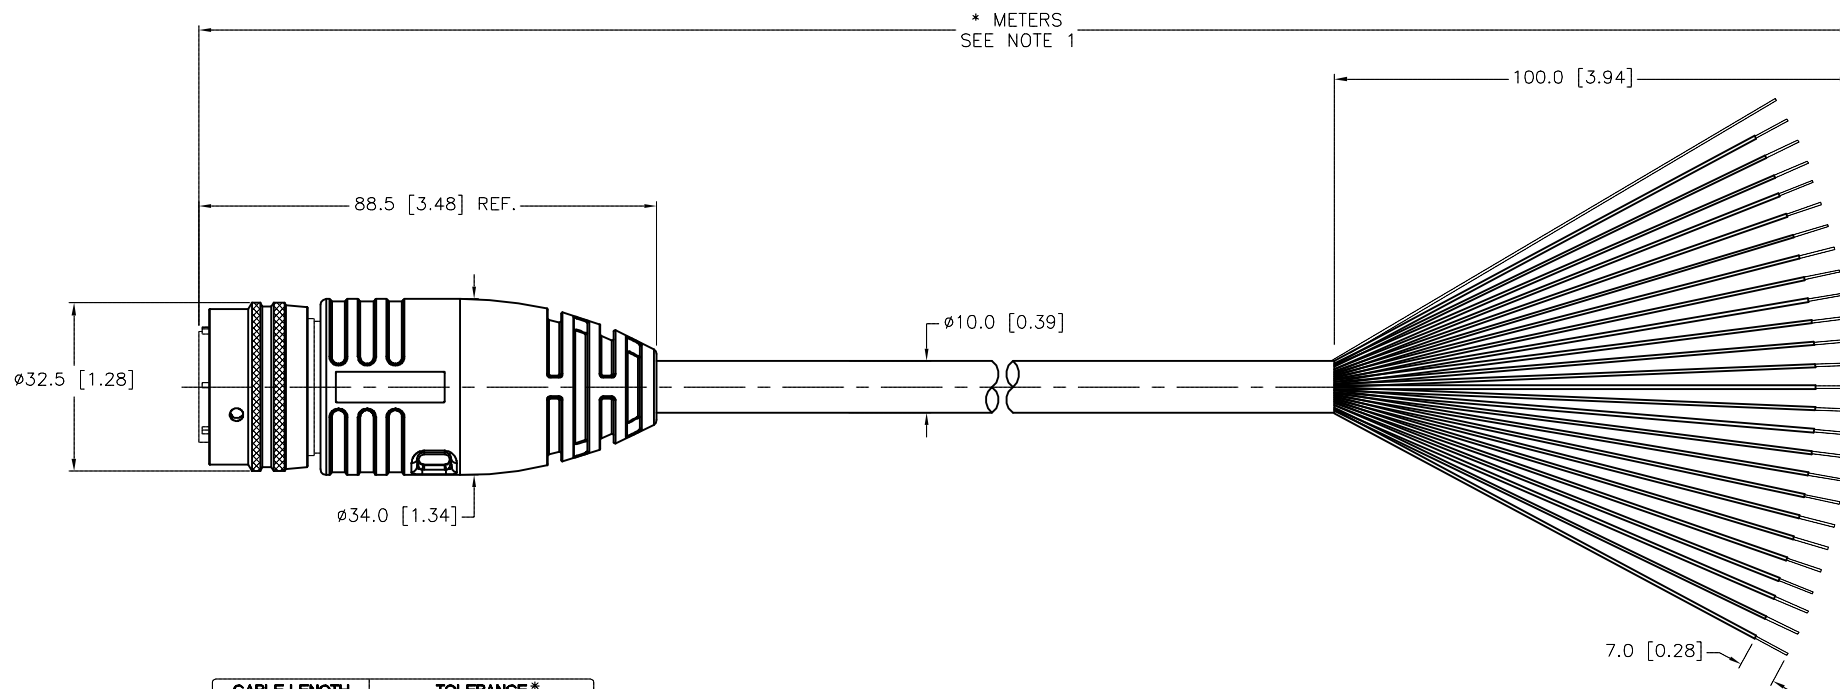


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT RWC	DATE 02/02/06	DESCRIPTION MS 3116M-16-26P-631-*		
APVD DD		SCALE 1=1.5				
FINISH SEE SPECIFICATIONS		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV D
		DO NOT SCALE THIS DRAWING		FILE: 777011178		SHEET 1 OF 1

D	UPDATE RATED CURRENT AND CONTACT PLATING	RDS	03/26/13	41648
REV	DESCRIPTION	BY	DATE	ECO NO.