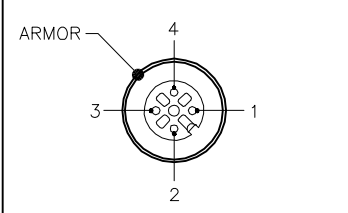
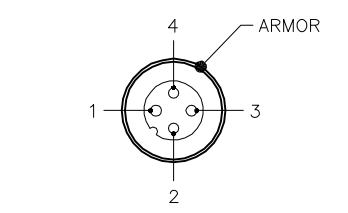


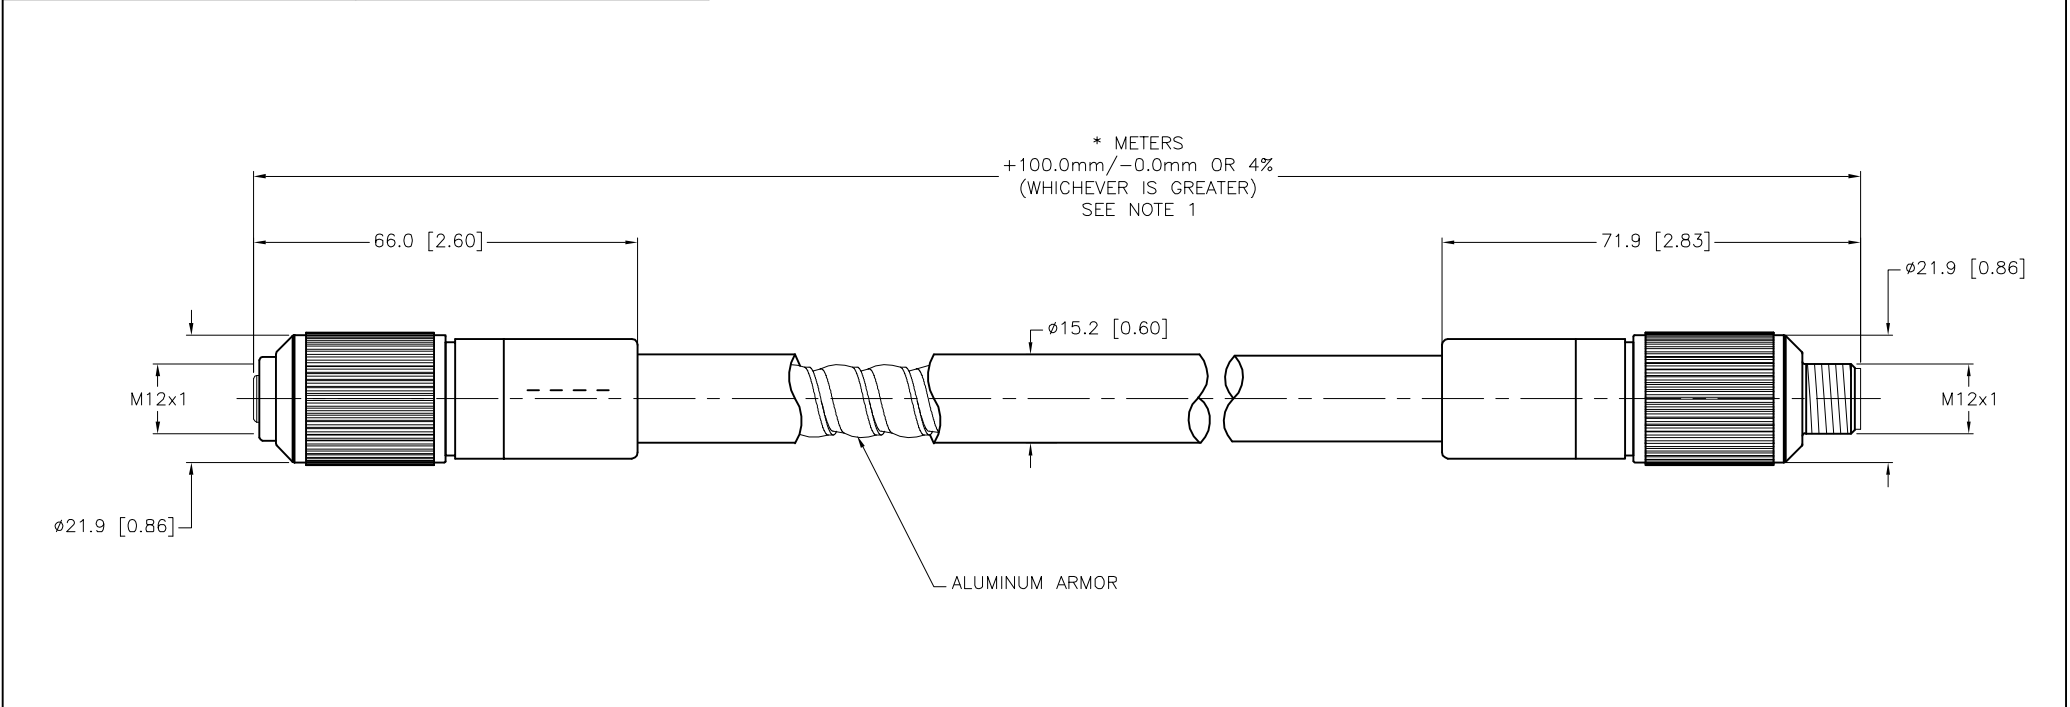



FEMALE END VIEW		MALE END VIEW	SPECIFICATIONS	
				
1 = BLACK 2 = WHITE 3 = RED 4 = GREEN/YELLOW		1 = BLACK 2 = WHITE 3 = RED 4 = GREEN/YELLOW		
				
			CONTACT CARRIER MATERIAL	TPU
			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	4.0 A
			RATED VOLTAGE [V]	250 V
			OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
			CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)
			NUMBER OF CONDUCTORS [AWG]	4x18 AWG
			SHIELDING	INTER-LOCKING ALUMINUM ARMOR
			TEMPERATURE RANGE	-40°C TO +105°C (-40°F TO +221°F)
			PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K



<div>NOTES:</div> <div>1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.</div> <div>2. CABLE ARMOR IS CONNECTED TO THE COUPLING NUT(S).</div>					SOURCE DRAWING - FOR REFERENCE ONLY					
					RELATED DOCUMENTS		3RD ANGLE PROJECTION		<div>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</div> <div>TURCK</div> <div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</div>	
					1. 2. 3. 4.					
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT PJ DATE 07/20/05 DESCRIPTION RKA 4.4A-*--RSA 4.4A	
FINISH		CONTACT TURCK FOR MORE INFORMATION		APVD PLJ SCALE 1=1.3		UNIT OF MEASUREMENT MILLIMETER [INCH]				
K UPDATED DRAWING AS 10/25/23 79407				DO NOT SCALE THIS DRAWING		IDENTIFICATION NO. REV K				
REV DESCRIPTION BY DATE ECO NO.						SHEET 1 OF 1				