




FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
 1 = RED/WHITE 2 = RED 3 = GREEN/YELLOW 4 = RED/YELLOW 5 = RED/BLACK 6 = RED/BLUE 	 1 = RED/WHITE 2 = RED 3 = GREEN/YELLOW 4 = RED/YELLOW 5 = RED/BLACK 6 = RED/BLUE 	CONTACT CARRIER MATERIAL MOLDED HEAD MATERIAL/COLOR CONTACT MATERIAL/PLATING COUPLING NUT MATERIAL/PLATING RATED CURRENT [A] RATED VOLTAGE [V] OUTER JACKET MATERIAL/COLOR CONDUCTOR INSULATION MATERIAL NUMBER OF CONDUCTORS [AWG] TEMPERATURE RATING PROTECTION CLASS	NYLON OR TPU TPU/YELLOW BRASS/GOLD BRASS/NICKEL 4.0 A 250 V PVC/YELLOW PVC 6x22 AWG -40°C to +105°C (-40°F to +221°F) NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K

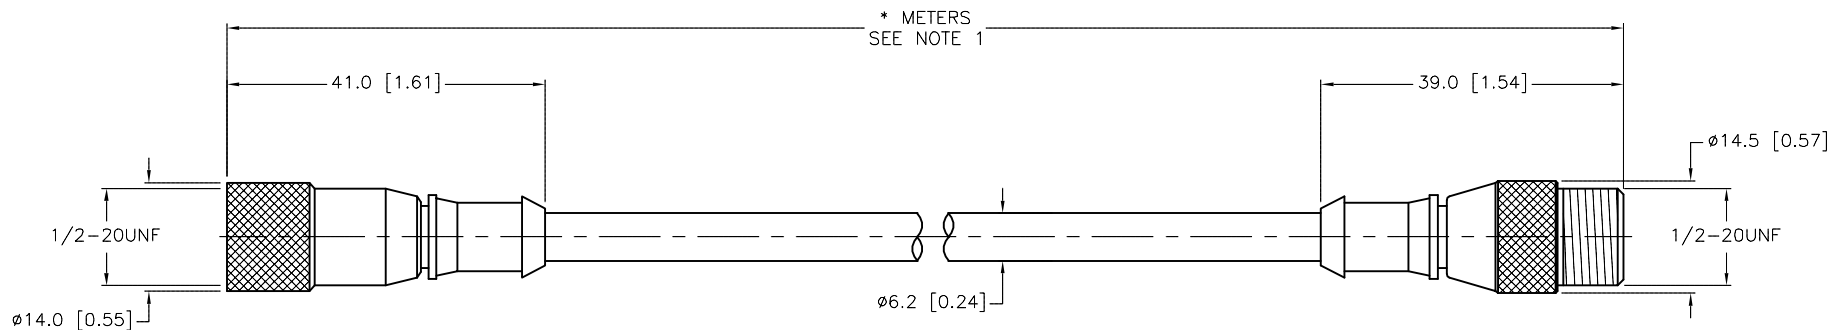


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RDS	DATE	12/29/06	DESCRIPTION KB 6T-*--SB 6T	
SEE SPECIFICATIONS		APVD		SCALE	1=1.0		
FINISH		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT			IDENTIFICATION NO.	
SEE SPECIFICATIONS	MILLIMETER [INCH]						
		DO NOT SCALE THIS DRAWING			FILE: 777011262		SHEET 1 OF 1

D	UPDATE CONDUCTOR COLOR	NF	10/03/17	61074
REV	DESCRIPTION	BY	DATE	ECO NO.