

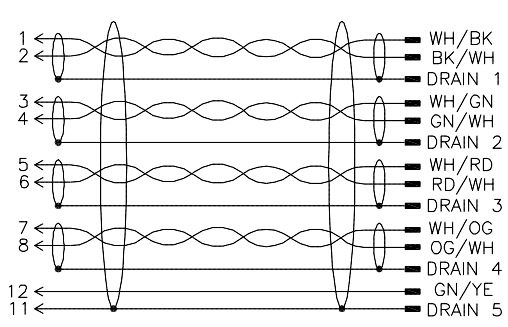



MALE END VIEW		WIRING DIAGRAM	SPECIFICATIONS	
 1 = WHITE/BLACK 2 = BLACK/WHITE 3 = WHITE/GREEN 4 = GREEN/WHITE 5 = WHITE/RED 6 = RED/WHITE 7 = WHITE/ORANGE 8 = ORANGE/WHITE 9 = N/C 10 = N/C 11 = DRAIN 12 = GREEN/YELLOW  M23 connector	 1 ← WH/BK 2 ← BK/WH 3 ← DRAIN 1 4 ← WH/GN 5 ← GN/WH 6 ← DRAIN 2 7 ← WH/RD 8 ← RD/WH 9 ← DRAIN 3 10 ← WH/OG 11 ← OG/WH 12 ← DRAIN 4 11 ← GN/YE 11 ← DRAIN 5	CONTACT CARRIER MATERIAL	NYLON or PBT	
		MOLDED HEAD MATERIAL/COLOR	TPU/BLACK	
		CONTACT MATERIAL/PLATING	BRASS/GOLD	
		COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED	
		RATED CURRENT [A]	3.0 A	
		RATED VOLTAGE [V]	250 V	
		OUTER JACKET MATERIAL/COLOR	PVC/PLUM	
		CONDUCTOR INSULATION MATERIAL	PVC	
		NUMBER OF CONDUCTORS [AWG]	8x22 AWG, 1x18 AWG GROUND	
		DRAIN/SHIELD	5x22 AWG DRAINS/ALUMINUM FOIL SHIELDED	
		TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)	
		PROTECTION CLASS	MEETS IEC IP67	
		CONDUCTOR ARRANGEMENT	4 SHIELDED TWISTED PAIR W/DRAIN, 1 GND, 1 DRAIN	
		CABLE RATINGS	UL: ITC/PLTC/AWM, 105C, 300 V CSA: CMG/AWM, 105C, 300 V	

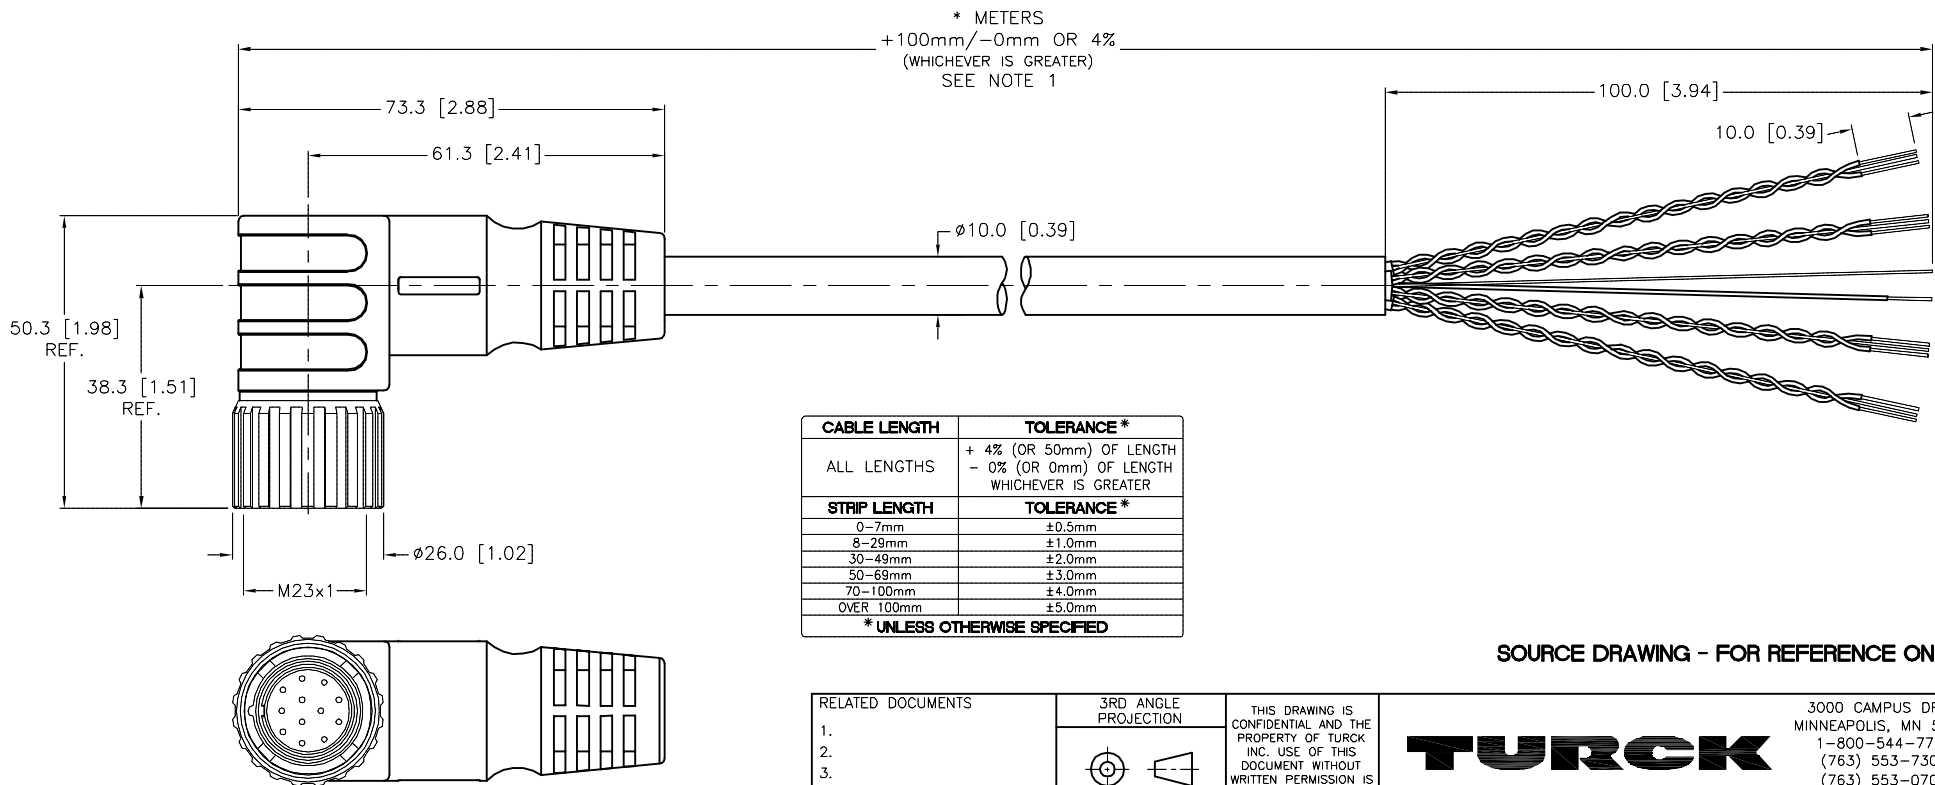

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

D	DRAWING PROCESSED AS PART OF ECO 39948	KMY	09/19/12	39948
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
	MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT	RDS	DATE	09/15/09		DESCRIPTION P-CSWMV 12-960-*
FINISH SEE SPECIFICATIONS	APVD		SCALE		1 = 1.3			
	UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING				IDENTIFICATION NO.		REV D	
				FILE: 777011464				SHEET 1 OF 1