


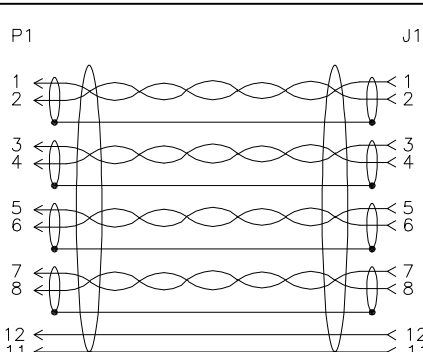
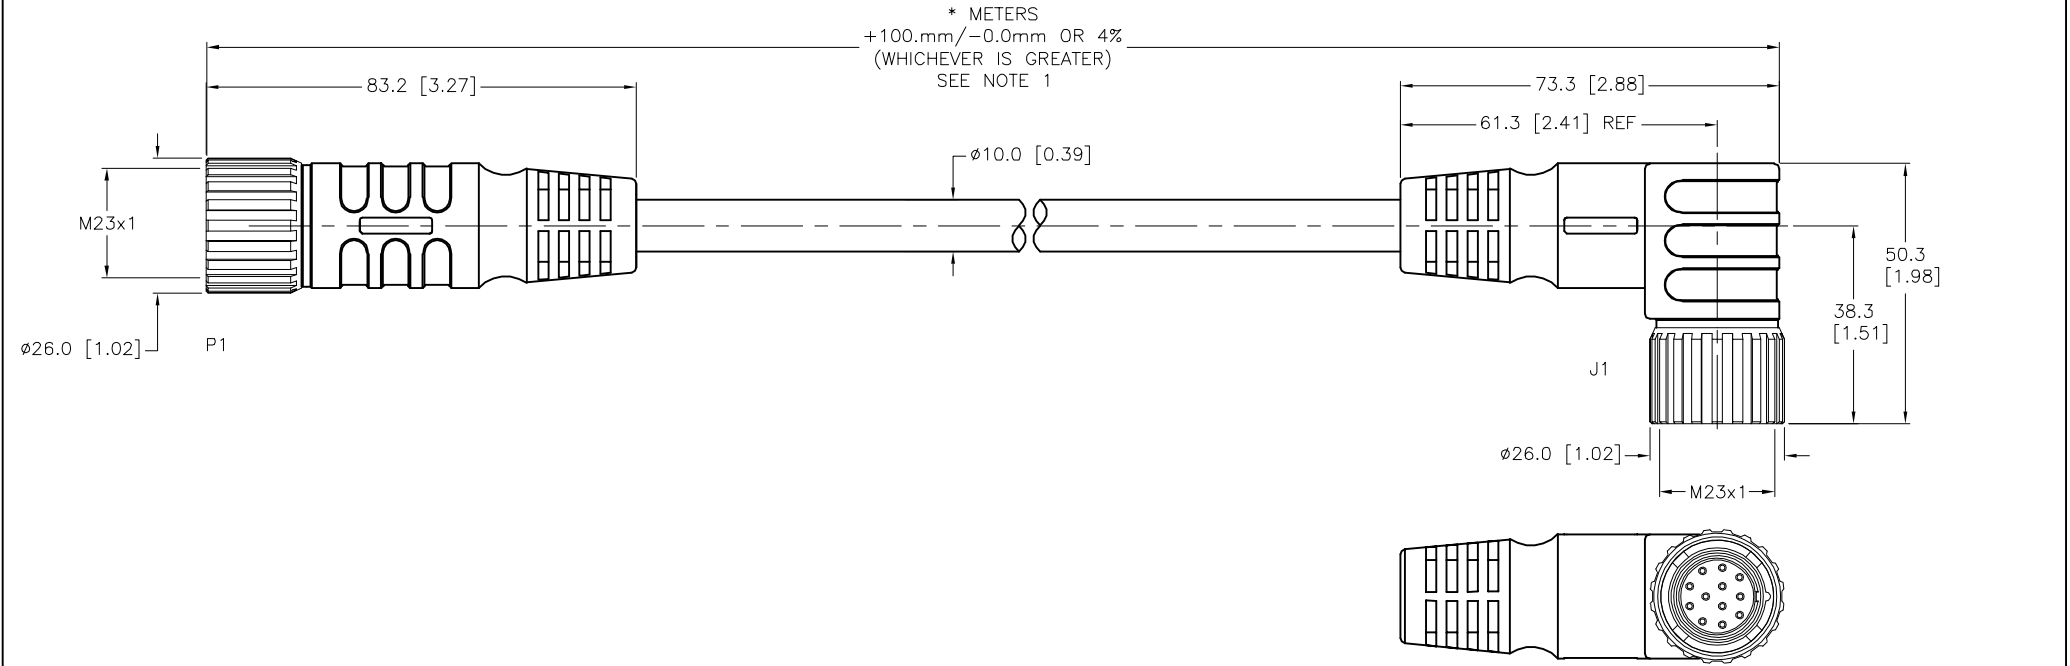


MALE END VIEW		FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
				CONTACT CARRIER MATERIAL	NYLON or PBT
1 = WHT/BLK 2 = BLK/WHT 3 = WHT/GRN 4 = GRN/WHT 5 = WHT/RED 6 = RED/WHT 7 = WHT/ORG 8 = ORG/WHT 9 = N/C 10 = N/C 11 = DRAIN 12 = GRN/YEL				MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
 M23 connector		 M23 connector		CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
				RATED CURRENT [A]	3.0 A
				RATED VOLTAGE [V]	150 V
				OUTER JACKET MATERIAL/COLOR	PVC/PLUM
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS [AWG]	8x22 AWG, 1x18 AWG GROUND
				DRAIN/SHIELD	5x22 AWG DRAINS/ALUMINUM-POLYESTER FOIL
				CONDUCTOR ARRANGEMENT	4 SHIELDED TWISTED PAIR W/DRAIN, 1 GND, 1 DRAIN
				TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	IEC IP67
				CABLE RATINGS	UL: ITC/PLTC/AWM, 105C, 300 V CSA: CMG/AWM, 105C, 300 V



SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
					1. 2. 3. 4.									
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RDS		DATE 12/11/06		DESCRIPTION P-CSMV CKWMV 12-960-*	
					SEE SPECIFICATIONS				APVD		SCALE 1=1.5			
					FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.	
SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING				FILE: 777011490			SHEET 1 OF 1					
D	DRAWING PROCESSED AS PART OF ECO 39948		KMY	09/19/12	39948									
REV	DESCRIPTION		BY	DATE	ECO NO.									